


**QUOTE D'INGOMBRO MOTORIDUTTORI COASSIALI serie "RE"
a doppia riduzione - con motori serie "MVT" e "MAT"**

Esecuzione con piedi - Forma B3 (e B6, B7, B8, V5, V6)

Esecuzione con flangia - Forma B5 (e V1, V3)

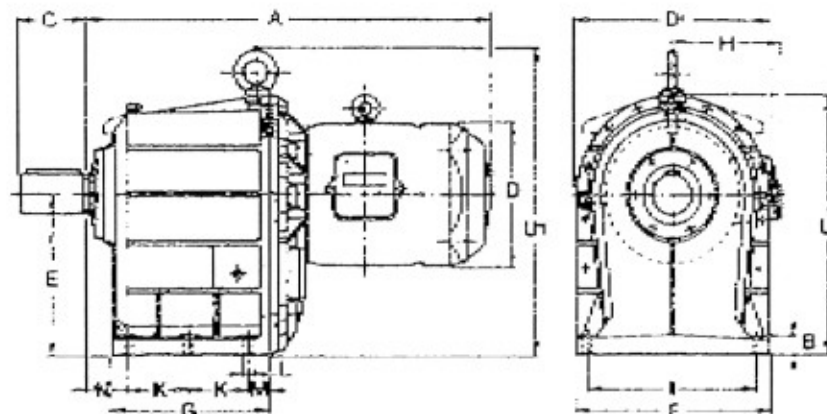

Per la grandezza R 7 i fori fissaggio piedi sono solo due anziché tre (l'interasse è uguale a 2K).
Per l'esecuzione flangiata le quote mancanti in figura sono comuni all'esecuzione con piedi.
Su richiesta possono essere forniti con flangia avente dimensioni DIN.

Tolleranze:


Quota R: m6; G1: h6.

*) Valore di A per accoppiamento a motore autofrenante a disco.

**OVERALL DIMENSIONS CO-AXIAL GEARMOTORS series
"RE" double reduction - with motor series "MVT" and "MAT"**

Foot mounting - Form B3 (also B6, B7, B8, V5 and V6)

Flange mounting - Form B5 (also V1 and V3)

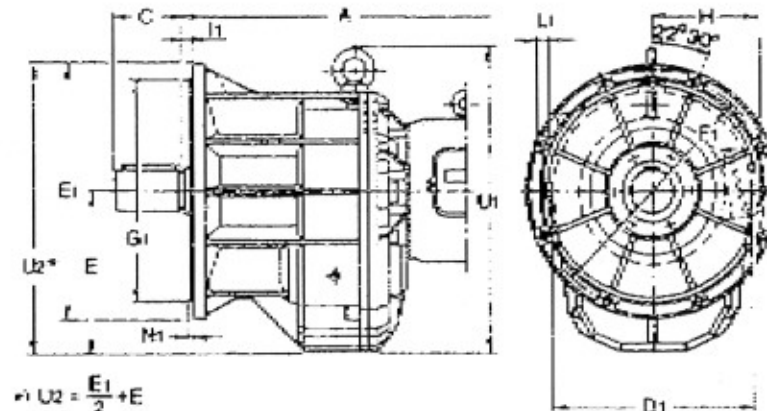

Size R 7 has on each side 2 foot fastening holes instead of 3 (the distance between centres is = 2 K).

Dimensions not shown in the flange mounting picture are the same as for foot mounting.

Our gearmotors are also available with flanges to DIN dimensions on request.

Tolerances:

dimension R: m6; G1: h6.

*) Value of A for coupling to brake motor.

FIMET

TIPO - TYPE		A	A*	B	C	D	D ₁	E	E ₁	F	F ₁	G	G ₁	H	I	I ₁	K	L	L ₁	M	N	N ₁	R	S	U	U ₁	Z	X	Y
R7E	MAT 132 S	772	865			270								207											485				
	MAT 132 M-MA	780	873			270								207											495				
	MAT 160 M-L-MC	882	-	38	170	330	410	280	450	410	400	337	350	236	350	9	115	28	18	65	67	5	85	22	485	562	90	M20	42
	MAT 180 M-L	935	-			330								253											485				
	MVT 200 L	949	-			380								265											485				
	MVT 225 S-M	1028	-			420								345											490				
R8E	MAT 160 M-L-MC	940	-			330								236											601				
	MAT 180 M-L	993	-			330								253											601				
	MVT 200 L	1007	-	38	210	380	490	355	660	490	600	374	550	365	425	10	133	22	22	63	92	6	100	28	601	691	106	M24	50
	MVT 225 S-M	1008	-			420								345											601				
	MVT 250 M	1097	-			470								370											601				
	MVT 280 S-L	1206	-			525								435											615				
R9E	MVT 200 LC-L	1038	-			380								265															
	MVT 225 S-M	1117	-	38	210	420	490	355	660	490	600	374	550	345	425	10	133	22	22	63	92	6	110	28	619	691	116	M24	50
	MVT 250 M	1127	-			470								370															
	MVT 280 S-M	1236	-			525								435															
R10E	MVT 200 LC-L	1184	-			380								265															
	MVT 225 S-M	1263	-	50	210	420	640	500	800	640	740	510	680	345	560	15	193	26	22	75	114	6	120	32	810	918	127	M24	50
	MVT 250 M	1273	-			470								370															
	MVT 280 S-M	1382	-			525								435															