



SICRE 2 F 90 KN 4,3 C.m 1830  
V.440 A 12,76  $V_E$  110 A.2,3

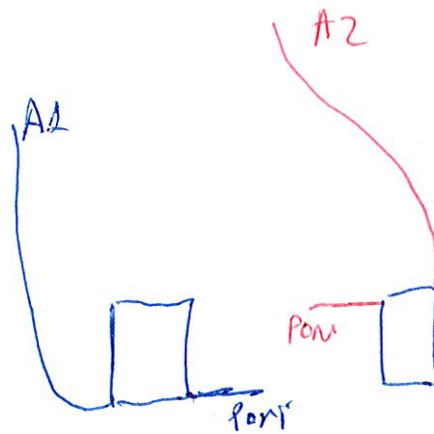

ROTATION

234 SPIR

$\phi$  1,50

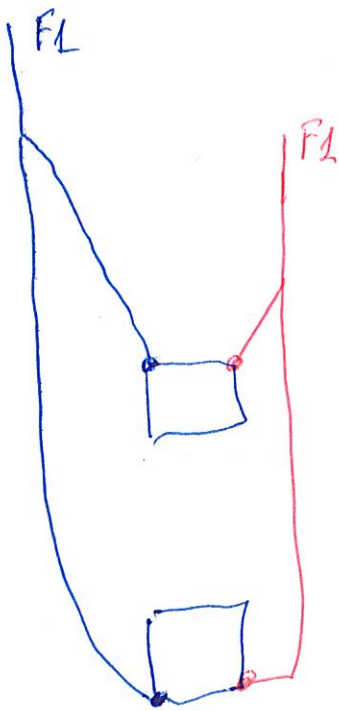

1500 SPIR

$\phi$  50

SICURE 2 F90 S2 KW. 4,3 V. 440 A 12,76

V<sub>B</sub> 110 A 2,3 C.I.M. 1830

INDOTTO 19 CAVI

COLLETT. 95 LAMBLA

PASSO = 10

SPIRE > 5 MATASSE DA 9 SPIRE

$\phi = 0,90$

PENDENZA SOTTO 2.3.4.5.6 VENT SX

SOPRA SI STRINGE NORMALE

