


DiCoder® CNS 50: Motor Feedback System for installation in electric motors

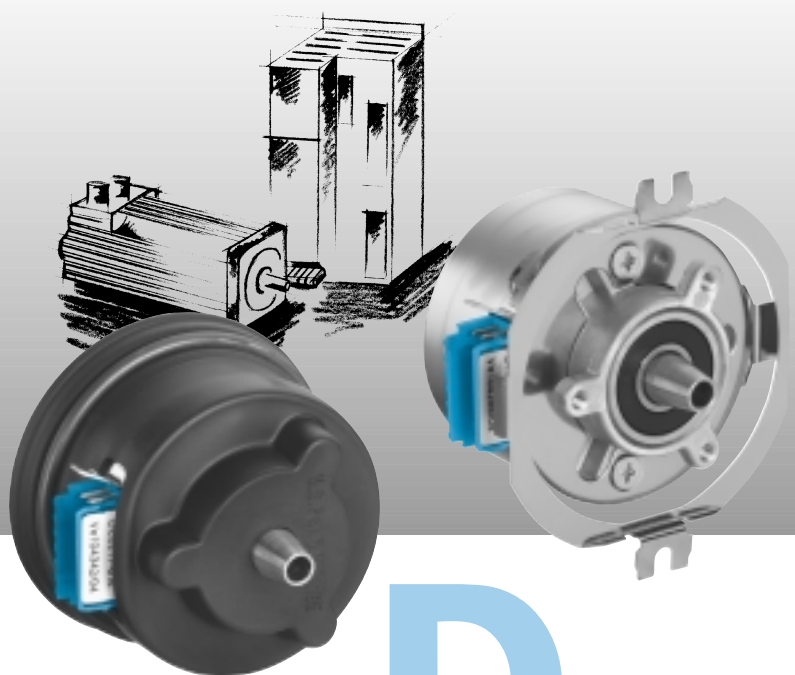


Incremental signals with resolutions up to 4,096 lines per revolution and commutation signals are available. Select the motor feedback system to suit your individual requirements.

Possible product variations:

- Plug-in shaft or tapered shaft with different stator supports
- 2 to 8 pole pairs

	Number of lines 1,000 up to 4,096
Motor Feedback System	

D DiCoder CNS 50 series of motor feedback systems are used world-wide in many different applications and environments.




Number of lines
1,000 up to 4,096

Motor Feedback System

- Output driver for incremental signals and commutation signals to EIA 422
- Working temperature range up to + 100 °C
- Two square-wave signals (90° off-set), reference pulse and the respective inverted signals
- Commutation signals R, S, T

Dimensional drawing CNS 50, rubber support Ø 50

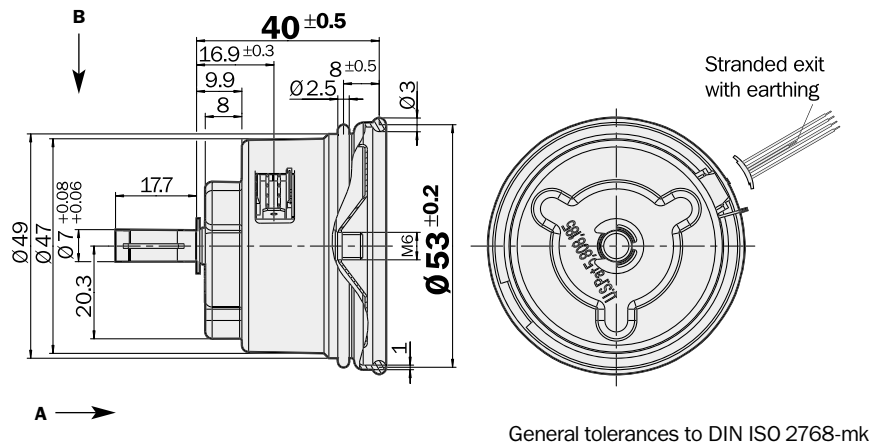


PIN and wire allocation/16 pin connector

PIN	Signal	Colour of Wires	Explanation
1	GND	blue	Ground connection
2	R	white/green	Commutation signal
3	S	white/yellow	Commutation signal
4	T	white/grey	Commutation signal
5	Z	violet	Reference signal
6	B	pink	Incremental signal
7	A	white	Incremental signal
8	N. C.	—	Not connected
9	U _s	red	Supply voltage 5 V ± 10 %
10	\bar{R}	white/pink	Commutation signal inverted
11	\bar{S}	white/blue	Commutation signal inverted
12	\bar{T}	white/red	Commutation signal inverted
13	\bar{Z}	yellow	Reference signal inverted
14	\bar{B}	black	Incremental signal inverted
15	\bar{A}	brown	Incremental signal inverted
16	N. C.	—	Not connected

Caution: Pins labelled "N. C." must not be occupied!

The encoder housing must be connected to the screen. Use the screen connection strand (200 mm, supplied) for this. It is included in the supply.

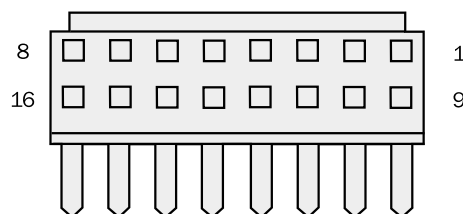

View of the plug-in face

Accessories

Connection technology

Technical Data			Plug-in Shaft CNS 50	CNS										
Number of lines per revolution			1,000, 1,024, 2,000, 2,048, 4,000, 4,096											
Commutation signals			(See diagram, page 4) other											
			commutation on request											
Dimensions			mm (see dimensional drawing)											
Mass			0,1 kg											
Inertial rotor moment			10 gcm ²											
Measurement step			90°/number of lines											
Reference signal	No. off		1											
	Position		90° electr., logically linked with A and B											
Max. operating speed			9,000 min ⁻¹											
Working speed			6,000 min ⁻¹											
Max. angular acceleration			0.2 x 10 ⁶ 1/s ²											
Operating torque			0.2 Ncm											
Starting torque			0.4 Ncm											
Permissible shaft movement														
static	radial/axial		± 0.5 mm/± 0.75 mm											
dynamic	radial/axial		± 0.05 mm/± 0.25 mm											
Angular motion, perpendicular to the rotational axis														
static			± 0.005 mm/mm											
dynamic			± 0.0025 mm/mm											
Life of ball bearings			3.6 x 10 ⁹ revolutions											
Working temperature range			0 ... + 100 °C											
Storage temperature range			- 40 ... + 125 °C											
Permissible relative humidity ¹⁾			90 %											
Resistance														
to shocks ²⁾			100/10 g/ms											
to vibration ³⁾			20/10 ... 2000 g/Hz											
Protection class acc. IEC 60529 ⁴⁾			IP 40											
EMC ⁵⁾														
Operating voltage range			5 V ± 10 %											
Max. operating current, no load			50 mA											
Interface details:														
Output driver			To DIN 66259 part 3											
			and EIA Standard RS 422											
Output signal sequence			See pulse-time diagram (page 4)											
Signal tolerance														
tx1 ... tx4 max. at 300 kHz			1.5 x 1/4 T											

¹⁾ Condensation not permissible

²⁾ To DIN EN 60068-2-27

³⁾ To DIN EN 60068-2-6

⁴⁾ With mating connector inserted


⁵⁾ To DIN EN 61000-6-2 and DIN 61000-6-3

The EMC according to the standards quoted is achieved when the motor feedback system is mounted in an electrically conductive housing, which is connected to the central earthing point of the motor controller via a cable screen. This is also where the GND (0 V) connection of the supply voltage is linked to earth.

Users must perform their own tests when other screen designs are used.

Incremental signals

At constant speed, looking at the input shaft, and clockwise rotation.

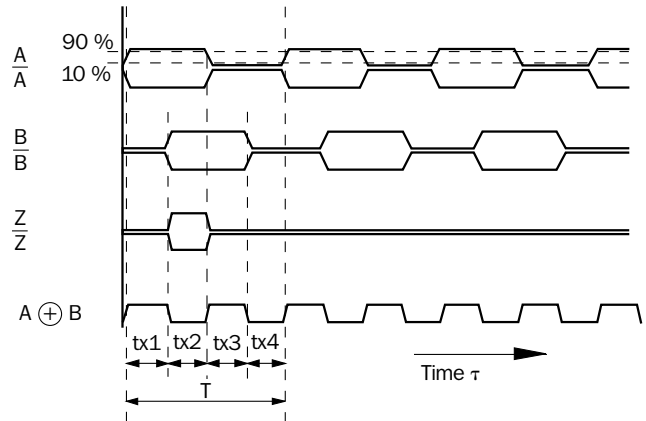

By linking the two signals A and B, an output signal is created whose cycle durations $tx1 \dots tx4$ have different sizes.

The differences are determined:

1. by the mark/space ratio tolerance of the individual channels


2. by the tolerance in the 90° phase shift between A and B

3. by the frequency

Ideally, the times $tx1 \dots tx4$ should always be $1/4$ of the cycle duration T.

The typical output frequency of the encoder is defined such that the max. time tx is smaller than $1.5 \times T/4$.

Pulse-time diagram

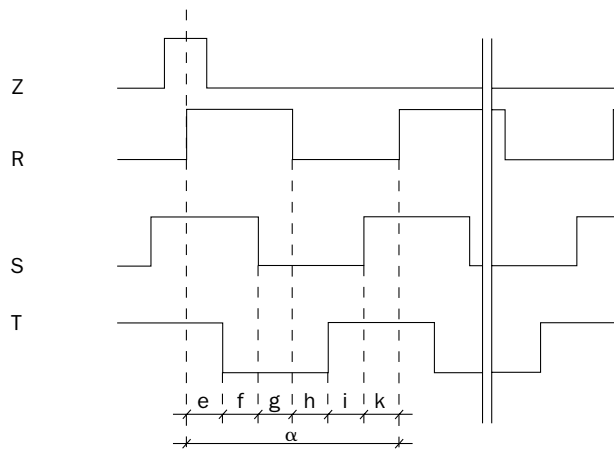

Pole pairs	Number of poles	e, f, g, h, i, k	α
2	4	30°	180°
3	6	20°	120°
4	8	15°	90°
6	12	10°	60°
8	16	$7,5^\circ$	45°

The angular data is related to a mechanical shaft rotation.

Precision of the signals R, S, T $\pm 1^\circ$.

Ordering information CNS 50

Motor Feedback System CNS 50 with plug-in shaft, diameter 7 mm

Position 1	Position 2	Position 3	Position 4	Position 5	Position 6	Position 7	Position 8	Position 9	Position 10	Position 11	Position 12	Position 13	Position 14
C	N	S	5	0	–	A	A				X		

Type of connection		Lines per revolution		Pole pairs	
Connector	= A	1,000	= 01	2 pole pairs	= 02
Stranded cable	= V	1,024	= 10	3 pole pairs	= 03
		2,000	= 02	4 pole pairs	= 04
		2,048	= 11	6 pole pairs	= 06
		4,000	= 04	8 pole pairs	= 08
		4,096	= 12		

Ordering example: Motor Feedback System CNS 50, plug-in Shaft 7 mm, rubber support Ø 50

4,096 lines, 3 pole pairs, connector exit

Position 1	Position 2	Position 3	Position 4	Position 5	Position 6	Position 7	Position 8	Position 9	Position 10	Position 11	Position 12	Position 13	Position 14
C	N	S	5	0	–	A	A	A	1	2	X	0	3

Please enter your individual encoder here

Position 1	Position 2	Position 3	Position 4	Position 5	Position 6	Position 7	Position 8	Position 9	Position 10	Position 11	Position 12	Position 13	Position 14
C	N	S	5	0	–	A	A				X		

Position 1	Position 2	Position 3	Position 4	Position 5	Position 6	Position 7	Position 8	Position 9	Position 10	Position 11	Position 12	Position 13	Position 14
C	N	S	5	0	–	A	A				X		

Position 1	Position 2	Position 3	Position 4	Position 5	Position 6	Position 7	Position 8	Position 9	Position 10	Position 11	Position 12	Position 13	Position 14
C	N	S	5	0	–	A	A				X		

Technical Data			Tapered Shaft CNS 50	CNS										
Number of lines per revolution			1,000, 1,024, 2,000, 2,048, 4,000, 4,096											
Commutation signals			(See diagram, page 8) other											
			commutation on request											
Dimensions			mm (see dimensional drawing)											
Mass			0,1 kg											
Inertial rotor moment			10 gcm ²											
Measurement step			90°/number of lines											
Reference signal	No. off		1											
	Position		90° electr., logically linked with A and B											
Max. operating speed			9,000 min ⁻¹											
Working speed			6,000 min ⁻¹											
Max. angular acceleration			0.2 x 10 ⁶ 1/s ²											
Operating torque			0.2 Ncm											
Starting torque			0.4 Ncm											
Permissible shaft movement														
static	radial/axial		± 0.5 mm/± 0.75 mm											
dynamic	radial/axial		± 0.05 mm/± 0.25 mm											
Angular motion, perpendicular to the rotational axis														
static			± 0.005 mm/mm											
dynamic			± 0.0025 mm/mm											
Life of ball bearings			3.6 x 10 ⁹ revolutions											
Working temperature range			0 ... + 100 °C											
Storage temperature range			- 40 ... + 125 °C											
Permissible relative humidity ¹⁾			90 %											
Resistance														
to shocks ²⁾			100/10 g/ms											
to vibration ³⁾			20/10 ... 2000 g/Hz											
Protection class acc. IEC 60529 ⁴⁾			IP 40											
EMC ⁵⁾														
Operating voltage range			5 V ± 10 %											
Max. operating current, no load			50 mA											
Interface details:														
Output driver			To DIN 66259 part 3											
			and EIA Standard RS 422											
Output signal sequence			See pulse-time diagram (page 8)											
Signal tolerance														
tx1 ... tx4 max. at 300 kHz			1.5 x 1/4 T											

¹⁾ Condensation not permissible

²⁾ To DIN EN 60068-2-27

³⁾ To DIN EN 60068-2-6

⁴⁾ With mating connector inserted


⁵⁾ To DIN EN 61000-6-2 and DIN 61000-6-3

The EMC according to the standards quoted is achieved when the motor feedback system is mounted in an electrically conductive housing, which is connected to the central earthing point of the motor controller via a cable screen. This is also where the GND (0 V) connection of the supply voltage is linked to earth.

Users must perform their own tests when other screen designs are used.

Incremental signals

At constant speed, looking at the input shaft, and clockwise rotation.

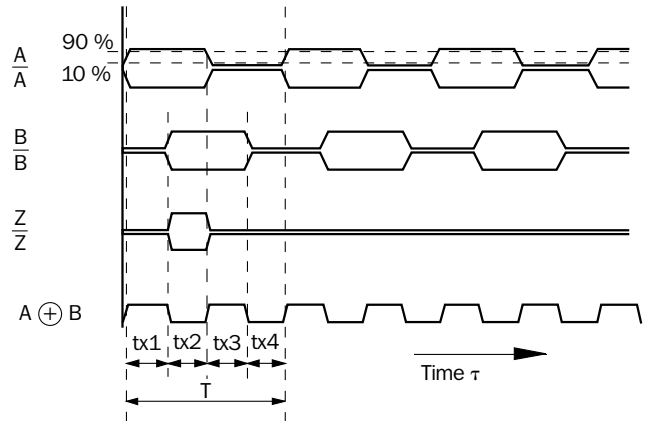

By linking the two signals A and B, an output signal is created whose cycle durations $tx1 \dots tx4$ have different sizes.

The differences are determined:

1. by the mark/space ratio tolerance of the individual channels


2. by the tolerance in the 90° phase shift between A and B

3. by the frequency

Ideally, the times $tx1 \dots tx4$ should always be $1/4$ of the cycle duration T.

The typical output frequency of the encoder is defined such that the max. time tx is smaller than $1.5 \times T/4$.

Pulse-time diagram

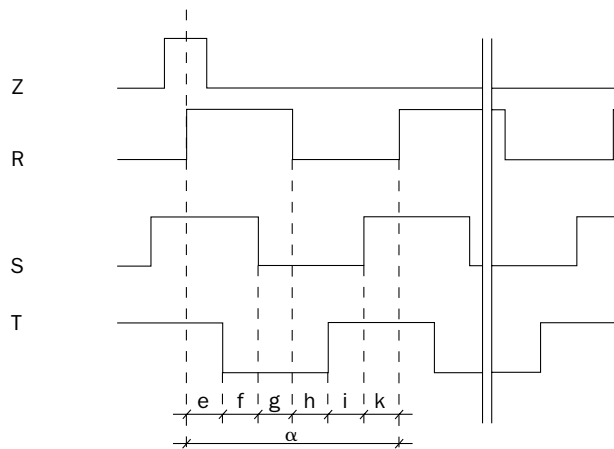

Pole pairs	Number of poles	e, f, g, h, i, k	α
2	4	30°	180°
3	6	20°	120°
4	8	15°	90°
6	12	10°	60°
8	16	$7,5^\circ$	45°

The angular data is related to a mechanical shaft rotation.

Precision of the signals R, S, T $\pm 1^\circ$.

Ordering information CNS 50
Motor Feedback System CNS 50 with tapered shaft

Position 1	Position 2	Position 3	Position 4	Position 5	Position 6	Position 7	Position 8	Position 9	Position 10	Position 11	Position 12	Position 13	Position 14
C	N	S	5	0	–	A	F				X		

Type of connection		Lines per revolution		Pole Pairs	
Connector	= A	1,000	= 01	2 pole pairs	= 02
Stranded cable	= V	1,024	= 10	3 pole pairs	= 03
		2,000	= 02	4 pole pairs	= 04
		2,048	= 11	6 pole pairs	= 06
		4,000	= 04	8 pole pairs	= 08
		4,096	= 12		

Ordering example: Motor Feedback System CNS 50, tapered shaft, spring mounting support Ø 66
4,096 lines, 3 pole pairs, connector exit


Position 1	Position 2	Position 3	Position 4	Position 5	Position 6	Position 7	Position 8	Position 9	Position 10	Position 11	Position 12	Position 13	Position 14
C	N	S	5	0	–	A	F	A	1	2	X	0	3

Please enter your individual encoder here

Position 1	Position 2	Position 3	Position 4	Position 5	Position 6	Position 7	Position 8	Position 9	Position 10	Position 11	Position 12	Position 13	Position 14
C	N	S	5	0	–	A	F				X		

Position 1	Position 2	Position 3	Position 4	Position 5	Position 6	Position 7	Position 8	Position 9	Position 10	Position 11	Position 12	Position 13	Position 14
C	N	S	5	0	–	A	F				X		

Position 1	Position 2	Position 3	Position 4	Position 5	Position 6	Position 7	Position 8	Position 9	Position 10	Position 11	Position 12	Position 13	Position 14
C	N	S	5	0	–	A	F				X		




Number of lines
1,000 up to 4,096

Motor Feedback System

- Output driver for incremental signals and commutation signals to EIA 422
- Working temperature range up to + 100 °C
- Two square-wave signals (90° off-set), reference pulse and the respective inverted signals
- Commutation signals R, S, T

Dimensional drawing CNS 50, resolver support Ø 52

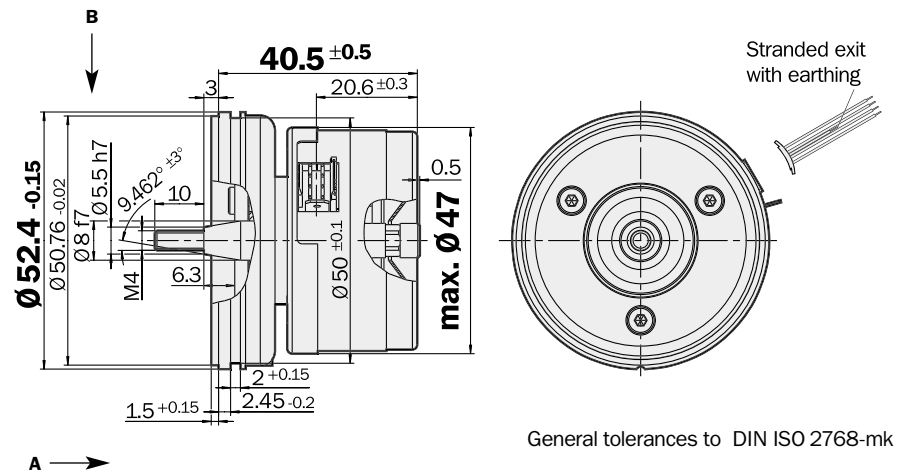


PIN and wire allocation/16 pin connector

PIN	Signal	Colour of Wires	Explanation
1	GND	blue	Ground connection
2	R	white/green	Commutation signal
3	S	white/yellow	Commutation signal
4	T	white/grey	Commutation signal
5	Z	violet	Reference signal
6	B	pink	Incremental signal
7	A	white	Incremental signal
8	N. C.	—	Not connected
9	U _s	red	Supply voltage 5 V ± 10 %
10	\bar{R}	white/pink	Commutation signal inverted
11	\bar{S}	white/blue	Commutation signal inverted
12	\bar{T}	white/red	Commutation signal inverted
13	\bar{Z}	yellow	Reference signal inverted
14	\bar{B}	black	Incremental signal inverted
15	\bar{A}	brown	Incremental signal inverted
16	N. C.	—	Not connected

Caution: Pins labelled "N. C." must not be occupied!

The encoder housing must be connected to the screen. Use the screen connection strand (200 mm, supplied) for this. It is included in the supply.

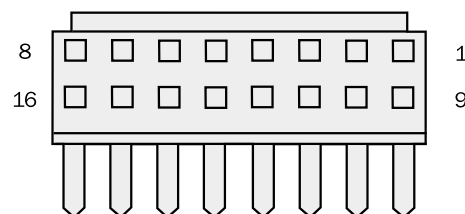

View of the plug-in face

Accessories

Connection technology

Technical Data			Tapered Shaft CNS 50	CNS										
Number of lines per revolution			1,000, 1,024, 2,000, 2,048, 4,000, 4,096											
Commutation signals			(See diagram, page 12) other											
			commutation on request											
Dimensions			mm (see dimensional drawing)											
Mass			0,1 kg											
Inertial rotor moment			10 gcm ²											
Measurement step			90°/number of lines											
Reference signal	No. off		1											
	Position		90° electr., logically linked with A and B											
Max. operating speed			9,000 min ⁻¹											
Working speed			6,000 min ⁻¹											
Max. angular acceleration			0.2 x 10 ⁶ 1/s ²											
Operating torque			0.2 Ncm											
Starting torque			0.4 Ncm											
Permissible shaft movement														
static	radial/axial		± 0.5 mm/± 0.75 mm											
dynamic	radial/axial		± 0.05 mm/± 0.25 mm											
Angular motion, perpendicular to the rotational axis														
static			± 0.005 mm/mm											
dynamic			± 0.0025 mm/mm											
Life of ball bearings			3.6 x 10 ⁹ revolutions											
Working temperature range			0 ... + 100 °C											
Storage temperature range			- 40 ... + 125 °C											
Permissible relative humidity ¹⁾			90 %											
Resistance														
to shocks ²⁾			100/10 g/ms											
to vibration ³⁾			20/10 ... 2000 g/Hz											
Protection class acc. IEC 60529 ⁴⁾			IP 40											
EMC ⁵⁾														
Operating voltage range			5 V ± 10 %											
Max. operating current, no load			50 mA											
Interface details:														
Output driver			To DIN 66259 part 3											
			and EIA Standard RS 422											
Output signal sequence			See pulse-time diagram (page 12)											
Signal tolerance														
tx1 ... tx4 max. at 300 kHz			1.5 x 1/4 T											

¹⁾ Condensation not permissible

²⁾ To DIN EN 60068-2-27

³⁾ To DIN EN 60068-2-6

⁴⁾ With mating connector inserted


⁵⁾ To DIN EN 61000-6-2 and DIN 61000-6-3

The EMC according to the standards quoted is achieved when the motor feedback system is mounted in an electrically conductive housing, which is connected to the central earthing point of the motor controller via a cable screen. This is also where the GND (0 V) connection of the supply voltage is linked to earth.

Users must perform their own tests when other screen designs are used.

Incremental signals

At constant speed, looking at the input shaft, and clockwise rotation.

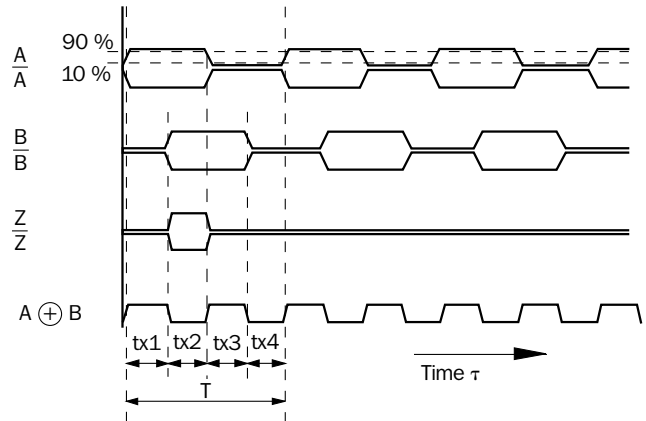

By linking the two signals A and B, an output signal is created whose cycle durations $tx1 \dots tx4$ have different sizes.

The differences are determined:

1. by the mark/space ratio tolerance of the individual channels


2. by the tolerance in the 90° phase shift between A and B

3. by the frequency

Ideally, the times $tx1 \dots tx4$ should always be $1/4$ of the cycle duration T.

The typical output frequency of the encoder is defined such that the max. time tx is smaller than $1.5 \times T/4$.

Pulse-time diagram

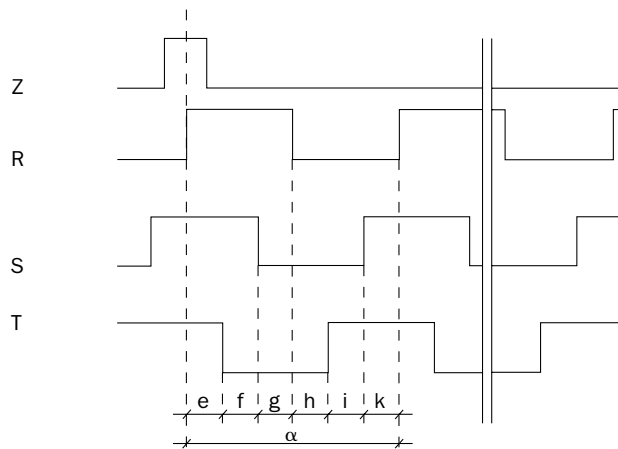

Pole pairs	Number of poles	e, f, g, h, i, k	α
2	4	30°	180°
3	6	20°	120°
4	8	15°	90°
6	12	10°	60°
8	16	$7,5^\circ$	45°

The angular data is related to a mechanical shaft rotation.

Precision of the signals R, S, T $\pm 1^\circ$.

Ordering information CNS 50

Motor Feedback System CNS 50 with tapered shaft

Position 1	Position 2	Position 3	Position 4	Position 5	Position 6	Position 7	Position 8	Position 9	Position 10	Position 11	Position 12	Position 13	Position 14
C	N	S	5	0	–	A	G				X		

Type of connection		Lines per revolution		Pole Pairs	
Connector	= A	1,000	= 01	2 pole pairs	= 02
Stranded cable	= V	1,024	= 10	3 pole pairs	= 03
		2,000	= 02	4 pole pairs	= 04
		2,048	= 11	6 pole pairs	= 06
		4,000	= 04	8 pole pairs	= 08
		4,096	= 12		

Ordering Example: Motor Feedback System CNS 50, tapered shaft, resolver support Ø 52

4,096 lines, 3 pole pairs, connector exit


Position 1	Position 2	Position 3	Position 4	Position 5	Position 6	Position 7	Position 8	Position 9	Position 10	Position 11	Position 12	Position 13	Position 14
C	N	S	5	0	–	A	G	A	1	2	X	0	3

Please enter your individual encoder here

Position 1	Position 2	Position 3	Position 4	Position 5	Position 6	Position 7	Position 8	Position 9	Position 10	Position 11	Position 12	Position 13	Position 14
C	N	S	5	0	–	A	G				X		

Position 1	Position 2	Position 3	Position 4	Position 5	Position 6	Position 7	Position 8	Position 9	Position 10	Position 11	Position 12	Position 13	Position 14
C	N	S	5	0	–	A	G				X		

Position 1	Position 2	Position 3	Position 4	Position 5	Position 6	Position 7	Position 8	Position 9	Position 10	Position 11	Position 12	Position 13	Position 14
C	N	S	5	0	–	A	G				X		




Number of lines
1,000 up to 4,096

Motor Feedback System

- Output driver for incremental signals and commutation signals to EIA 422
- Working temperature range up to + 100 °C
- Two square-wave signals (90° off-set), reference pulse and the respective inverted signals
- Commutation signals R, S, T

Dimensional drawing CNS 50, rubber support Ø 50

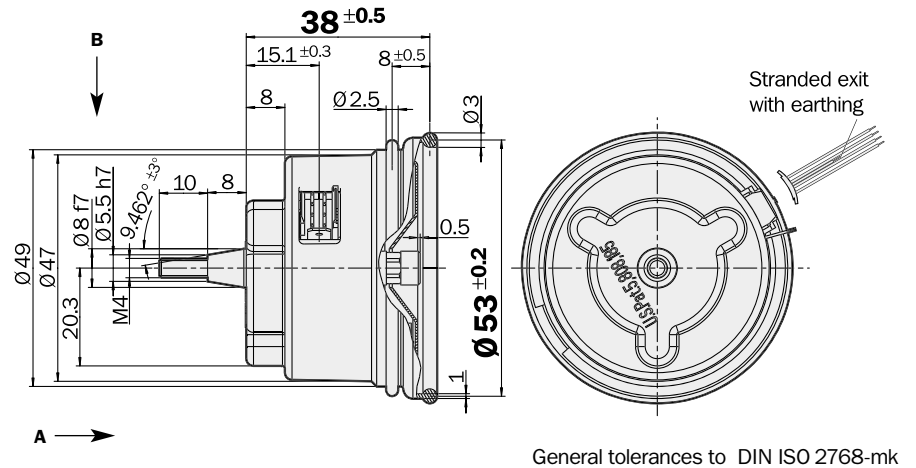


PIN and wire allocation/16 pin connector

PIN	Signal	Colour of Wires	Explanation
1	GND	blue	Ground connection
2	R	white/green	Commutation signal
3	S	white/yellow	Commutation signal
4	T	white/grey	Commutation signal
5	Z	violet	Reference signal
6	B	pink	Incremental signal
7	A	white	Incremental signal
8	N. C.	—	Not connected
9	U _s	red	Supply voltage 5 V ± 10 %
10	\bar{R}	white/pink	Commutation signal inverted
11	\bar{S}	white/blue	Commutation signal inverted
12	\bar{T}	white/red	Commutation signal inverted
13	\bar{Z}	yellow	Reference signal inverted
14	\bar{B}	black	Incremental signal inverted
15	\bar{A}	brown	Incremental signal inverted
16	N. C.	—	Not connected

Caution: Pins labelled "N. C." must not be occupied!

The encoder housing must be connected to the screen. Use the screen connection strand (200 mm, supplied) for this. It is included in the supply.

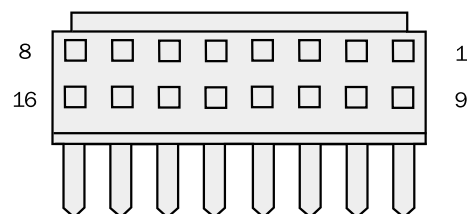

View of the plug-in face

Accessories

Connection technology

Technical Data			Tapered Shaft CNS 50	CNS										
Number of lines per revolution			1,000, 1,024, 2,000, 2,048, 4,000, 4,096											
Commutation signals			(See diagram, page 16) other											
			commutation on request											
Dimensions			mm (see dimensional drawing)											
Mass			0,1 kg											
Inertial rotor moment			10 gcm ²											
Measurement step			90°/number of lines											
Reference signal	No. off		1											
	Position		90° electr., logically linked with A and B											
Max. operating speed			9,000 min ⁻¹											
Working speed			6,000 min ⁻¹											
Max. angular acceleration			0.2 x 10 ⁶ 1/s ²											
Operating torque			0.2 Ncm											
Starting torque			0.4 Ncm											
Permissible shaft movement														
static	radial/axial		± 0.5 mm/± 0.75 mm											
dynamic	radial/axial		± 0.05 mm/± 0.25 mm											
Angular motion, perpendicular to the rotational axis														
static			± 0.005 mm/mm											
dynamic			± 0.0025 mm/mm											
Life of ball bearings			3.6 x 10 ⁹ revolutions											
Working temperature range			0 ... + 100 °C											
Storage temperature range			- 40 ... + 125 °C											
Permissible relative humidity ¹⁾			90 %											
Resistance														
to shocks ²⁾			100/10 g/ms											
to vibration ³⁾			20/10 ... 2000 g/Hz											
Protection class acc. IEC 60529 ⁴⁾			IP 40											
EMC ⁵⁾														
Operating voltage range			5 V ± 10 %											
Max. operating current, no load			50 mA											
Interface details:														
Output driver			To DIN 66259 part 3											
			and EIA Standard RS 422											
Output signal sequence			See pulse-time diagram (page 16)											
Signal tolerance														
tx1 ... tx4 max. at 300 kHz			1.5 x 1/4 T											

¹⁾ Condensation not permissible

²⁾ To DIN EN 60068-2-27

³⁾ To DIN EN 60068-2-6

⁴⁾ With mating connector inserted


⁵⁾ To DIN EN 61000-6-2 and DIN 61000-6-3

The EMC according to the standards quoted is achieved when the motor feedback system is mounted in an electrically conductive housing, which is connected to the central earthing point of the motor controller via a cable screen. This is also where the GND (0 V) connection of the supply voltage is linked to earth.

Users must perform their own tests when other screen designs are used.

Incremental signals

At constant speed, looking at the input shaft, and clockwise rotation.

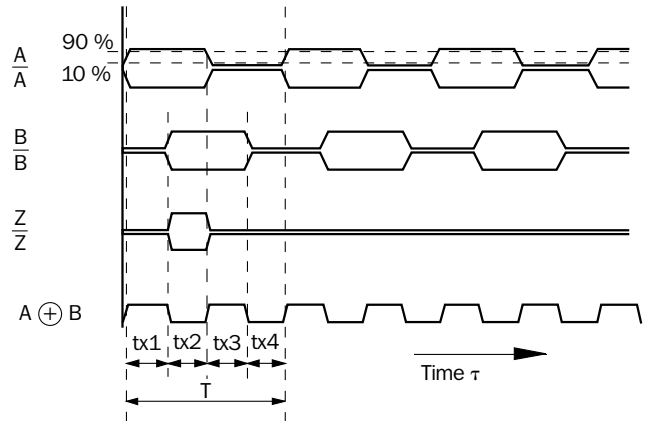

By linking the two signals A and B, an output signal is created whose cycle durations $tx1 \dots tx4$ have different sizes.

The differences are determined:

1. by the mark/space ratio tolerance of the individual channels


2. by the tolerance in the 90° phase shift between A and B

3. by the frequency

Ideally, the times $tx1 \dots tx4$ should always be $1/4$ of the cycle duration T.

The typical output frequency of the encoder is defined such that the max. time tx is smaller than $1.5 \times T/4$.

Pulse-time diagram

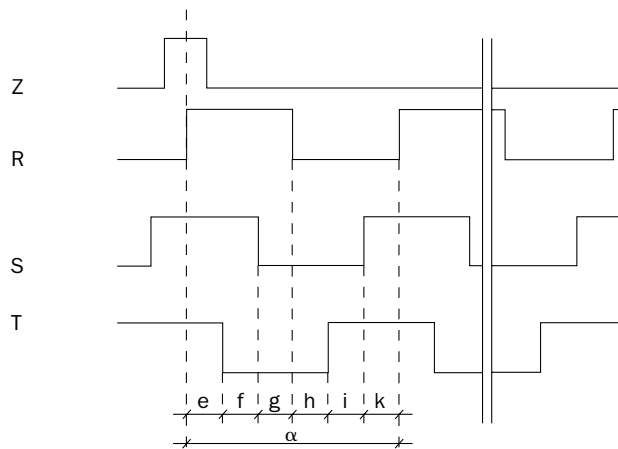

Pole pairs	Number of poles	e, f, g, h, i, k	α
2	4	30°	180°
3	6	20°	120°
4	8	15°	90°
6	12	10°	60°
8	16	$7,5^\circ$	45°

The angular data is related to a mechanical shaft rotation.

Precision of the signals R, S, T $\pm 1^\circ$.

Ordering information CNS 50

Motor Feedback System CNS 50 with tapered shaft

Position 1	Position 2	Position 3	Position 4	Position 5	Position 6	Position 7	Position 8	Position 9	Position 10	Position 11	Position 12	Position 13	Position 14
C	N	S	5	0	–	A	E				X		

Type of connection	Lines per revolution	Pole Pairs
Connector = A	1,000 = 01	2 pole pairs = 02
Stranded cable = V	1,024 = 10	3 pole pairs = 03
	2,000 = 02	4 pole pairs = 04
	2,048 = 11	6 pole pairs = 06
	4,000 = 04	8 pole pairs = 08
	4,096 = 12	

Ordering example: Motor Feedback System CNS 50, tapered shaft, rubber support Ø 50

4,096 lines, 3 pole pairs, connector exit

Position 1	Position 2	Position 3	Position 4	Position 5	Position 6	Position 7	Position 8	Position 9	Position 10	Position 11	Position 12	Position 13	Position 14
C	N	S	5	0	–	A	E	A	1	2	X	0	3

Please enter your individual encoder here

Position 1	Position 2	Position 3	Position 4	Position 5	Position 6	Position 7	Position 8	Position 9	Position 10	Position 11	Position 12	Position 13	Position 14
C	N	S	5	0	–	A	E				X		


Position 1	Position 2	Position 3	Position 4	Position 5	Position 6	Position 7	Position 8	Position 9	Position 10	Position 11	Position 12	Position 13	Position 14
C	N	S	5	0	–	A	E				X		

Position 1	Position 2	Position 3	Position 4	Position 5	Position 6	Position 7	Position 8	Position 9	Position 10	Position 11	Position 12	Position 13	Position 14
C	N	S	5	0	–	A	E				X		

Dimensional drawings and ordering information

Stranded cable/connector , straight, 14 wires, 14 x 0.24 mm²

Type	Part no.	Contacts	Wire length
DOL-OB14-GOM2XB3	2 031 082	16	0.2 m

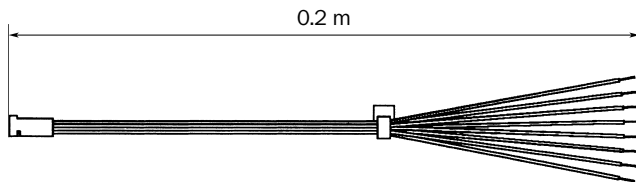

Contact:

Australia

Phone +61 3 9497 4100
1800 33 48 02 – tollfree
E-Mail sales@sick.com.au

Belgique/Luxembourg

Phone +32 (0)2 466 55 66
E-Mail info@sick.be

Brasil

Phone +55 11 5091-4900
E-Mail sac@sick.com.br

Ceská Republika

Phone +420 2 57 91 18 50
E-Mail sick@sick.cz

China

Phone +852-2763 6966
E-Mail ghk@sick.com.hk

Danmark

Phone +45 45 82 64 00
E-Mail sick@sick.dk

Deutschland

Phone +49 (0)2 11 53 01-250
E-Mail vzdinfo@sick.de

España

Phone +34 93 480 31 00
E-Mail info@sick.es

France

Phone +33 1 64 62 35 00
E-Mail info@sick.fr

Great Britain

Phone +44 (0)1727 831121
E-Mail info@sick.co.uk

Italia

Phone +39 011 797965
E-Mail stegmann@stegmann.it

Japan

Phone +81 (0)3 3358 1341
E-Mail info@sick.jp

Korea

Phone +82-2 786 6321/4
E-Mail kang@sickkorea.net

Nederland

Phone +31 (0)30 229 25 44
E-Mail info@sick.nl

Norge

Phone +47 67 81 50 00
E-Mail austefjord@sick.no

Österreich

Phone +43 (0)22 36 62 28 8-0
E-Mail office@sick.at

Polska

Phone +48 22 837 40 50
E-Mail info@sick.pl

Schweiz

Phone +41 41 619 29 39
E-Mail contact@sick.ch

Singapore

Phone +65 6744 3732
E-Mail admin@sicksgp.com.sg

Suomi

Phone +358-9-25 15 800
E-Mail sick@sick.fi

Sverige

Phone +46 8 680 64 50
E-Mail info@sick.se

Taiwan

Phone +886 2 2365-6292
E-Mail sickgrc@ms6.hinet.net

USA

Phone +1 937-454-1956
E-Mail sales@stegmann.com

More representatives and agencies
in all major industrial nations at
www.sick.com



SICK

6900 West 110th Street
Minneapolis, MN 55438

Ph: 800.325.SICK (7425) • Fax: 952.941.9287
www.sickusa.com

SICK STEGMANN, INC.

7496 Webster Street
Dayton, OH 45414

Ph: 800.811.9110 • Fax: 937.454.1955
www.stegmann.com