


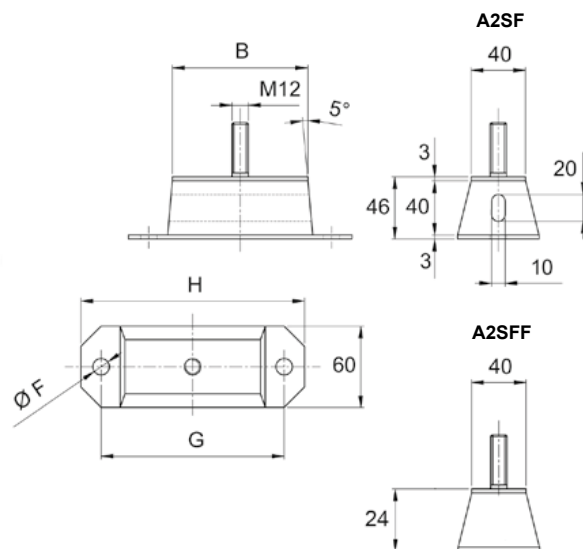

GeTech[®]

www.getechsrl.com

SF
SFF
Supporto Antivibrante Rettangolare Forato
Rectangular Antivibration Support


COD.	B	G	H	F	Carico max Statico Max Load daN
A2SF50	50	85	115	12,2	300
A2SF100	100	135	165	12,2	500
A2SFF100	100	135	165	12,2	500
A2SF150	150	185	215	12,2	750
A2SF200	200	235	265	12,2	1000

Caratteristiche
MATERIALE CORPO: Mescola gomma NR/SBR

DUREZZA STANDARD: 60 shore A

TOLLERANZA SULLA DUREZZA: +/- 5 SH

A RICHIESTA: 45 shore A

PARTE METALLICA E/O FISSAGGIO: Lamiera acciaio zincata

TIPO INSERTO STANDARD: Con perno filettato MA 12x37

ART. A2SFF100 con perno estraibile
Product specification
MAIN PART MATERIAL: NBR rubber compound

STANDARD HARDNESS: 60 shore A

HARDNESS TOLERANCE: +/- 5 SH


ON REQUEST: 45 shore A hardness

METALLIC PART: Zinc plated steel sheet

STANDARD THREAD: With screw MA 12x37

ART. A2SFF100 with extractable screw
PM
Piedino Antivibrante Maschio in Acciaio Zincato
Zinc Plated Male Footing

COD.	A	B	M	E	Carico max a Compres. Max Compression Load daN
A1PM1510	15	10	04MA	10	10
A1PM1515	15	15	04MA	14	10
A1PM1610	16	10	05MA	12	12
A1PM2008	20	8,5	06MA	10	18
A1PM2010	20	10	06MA	16	16
A1PM2015	20	15	06MA	16	18
A1PM2020	20	20	06MA	16	18
A1PM2025	20	25	06MA	16	18
A1PM2030	20	30	06MA	16	16
A1PM2515	25	15	06MA	18	29
A1PM2520/6	25	20	06MA	18	29
A1PM2520/8	25	20	08MA	20	29
A1PM2525	25	25	06MA	18	29
A1PM2530/6	25	30	06MA	18	29
A1PM2530/8	25	30	08MA	20	29
A1PM2530/8L	25	30	08MA	30	29
A1PM3010/6	30	10	06MA	20	42
A1PM3010	30	10	08MA	20	42
A1PM3010-40	30	10	08MA	40	42
A1PM3015	30	15	08MA	20	42
A1PM3020	30	20	08MA	20	42
A1PM3025	30	25	08MA	20	42
A1PM3030	30	30	08MA	20	38
A1PM3040	30	40	08MA	20	38
A1PM4020	40	20	08MA	23	57
A1PM4030/10	40	30	10MA	28	75
A1PM4030/8	40	30	08MA	23	75
A1PM4035/8	40	35	08MA	23	75
A1PM4040/10	40	40	10MA	28	75
A1PM4040/8	40	40	08MA	23	75
A1PM5020	50	20	10MA	28	117
A1PM5030	50	30	10MA	28	117
A1PM5040	50	40	10MA	28	117
A1PM5045	50	45	10MA	28	117
A1PM5050	50	50	10MA	28	117
A1PM6020/12	60	20	12MA	37	169
A1PM6030/12	60	30	12MA	37	169
A1PM6040/12	60	40	12MA	37	169
A1PM6050/10	60	50	10MA	35	169
A1PM6050/12	60	50	12MA	37	169
A1PM7525	75	25	12MA	37	265
A1PM7540	75	40	12MA	37	265
A1PM7550	75	50	12MA	37	265
A1PM10040	100	40	16MA	42	471
A1PM10050	100	50	16MA	42	471
A1PM10080	100	80	16MA	45	380

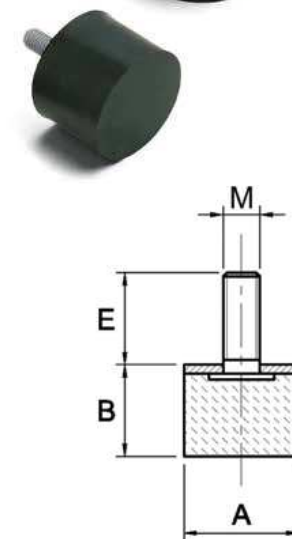
Caratteristiche
MATERIALE CORPO: Mescola gomma NR/SBR

DUREZZA STANDARD: 60 shore A

TOLLERANZA SULLA DUREZZA: +/- 5 SH

A RICHIESTA: 45 shore A

PARTE METALLICA E/O FISSAGGIO: Vite e rondella zincate

TIPO INSERTO STANDARD: Vite pressata sulla rondella

Product specification
MAIN PART MATERIAL: NR/SBR rubber compound

STANDARD HARDNESS: 60 shore A

HARDNESS TOLERANCE: +/- 5 SH

ON REQUEST: 45 shore A hardness

METALLIC PART: Zinc plated steel sheet

STANDARD THREAD: With screw MA 12x37

ART. A2SFF100 with extractable screw

Misure e durezze differenti producibili su richiesta, rivolgersi all'ufficio commerciale.

Other sizes or hardness can be produced on demand, for information please contact our sales department.