


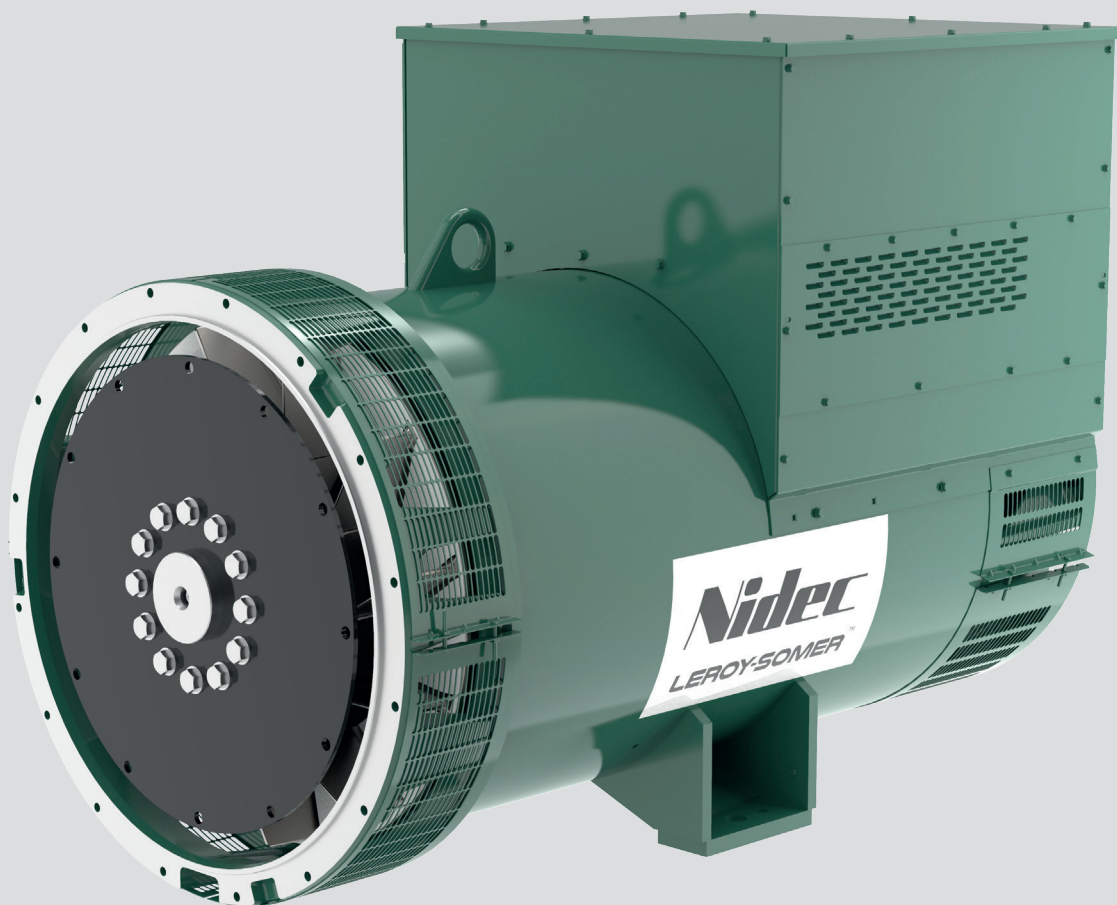

LSA 50.2

Low Voltage Alternator - 4 pole

1100 to 1640 kVA - 50 Hz / 1250 to 2000 kVA - 60 Hz

Electrical and mechanical data

LEROY-SOMER™

Nidec
— All for dreams

The best of performance

Nidec Leroy-Somer LSA 50.2 alternator has been designed to offer you the best power generation performances. With its meticulous design and optimized architecture, the LSA 50.2 strikes the perfect balance between compactness, reliability, performance and longevity.

Whatever your application, the LSA 50.2 will meet your needs and will adapt to all situations.

Standards

Nidec Leroy-Somer LSA 50.2 alternator meets all key international standards and regulations, including IEC 60034, NEMA MG 1.32-33, ISO 8528-3, CSA C22.2 n°100-14 and UL 1446 (UL 1004 on request). Also compliant with IEC 61000-6-2, IEC 61000-6-3, IEC 61000-6-4, VDE 0875G, VDE 0875N and EN 55011, group 1 class A for European zone.

Nidec Leroy-Somer LSA 50.2 alternator can be integrated in EC marked generator set, and bears EC, UKCA and CMIM markings. It is designed, manufactured and marketed in an ISO 9001 and ISO 14001 quality assurance environment.

Electrical characteristics and performances

- Class H insulation
- 2/3 pitch winding, standard 6-wire (6S) reconnectable or 12-wire (6) optional
- Voltage range:
 - 50 Hz: 220V - 240V and 380V - 415V (440V)
 - 60 Hz: 208V - 240V and 380V - 480V
- High efficiency and motor starting capacity
- Other voltages are possible with optional adapted windings:
 - 50 Hz: 440V (no. 7), 500V (no. 9), 550V (no. 22 or 23), 600V (no. 22 or 23), 690V (no. 52)
 - 60 Hz: 380V and 416V (no. 8), 600V (no. 9), 690V (no. 22 or 23)

Excitation and regulation system

Excitation system			Regulation options		
AVR	AREP	PMG (option)	C.T. Current transformer for paralleling	Mains paralleling	Remote voltage potentiometer
D350	Standard	Standard	√		√
D550	Option	Option	√	√	√

3-phase sensing is included as a standard with digital regulators.

Protection system and options

- The LSA 50.2 is IP 23
- Complete winding protection for clean environments with relative humidity $\leq 95\%$, including indoor marine environments
- Options:
 - Filters on air inlet: derating 5%
 - Filters on air inlet and air outlet (IP 44): derating 10%
 - Reinforced winding protection for harsh environments and relative humidity greater than 95%
 - Space heater
 - Thermal protection for stator windings and shields

Mechanical construction

- Compact and rigid assembly to better withstand generator vibrations
- Steel frame
- Cast iron flanges and shields
- Two-bearing and single-bearing versions designed to be suitable for engines on the market
- Half-key balancing
- Greased for life bearings, regreasable bearings (optional)
- Standard direction of rotation: clockwise when looking at the drive end view (for anti-clockwise, derate the machine by 5%)

Terminal box design

- Easy access to the voltage regulator and to the connections
- Possible inclusion of accessories for paralleling, protection and measurement
- Connection bars for voltage reconnection

LSA 50.2 - 1100 to 1640 kVA - 50 Hz / 1250 to 2000 kVA - 60 Hz

General characteristics

Insulation class	H	Excitation system	AREP / PMG
Winding pitch	2/3 (wind.6S - 6-wire / wind.6 - 12-wire option)	AVR type	D350
Number of wires	6 (12 option)	Voltage regulation (*)	± 0.25 %
Protection	IP 23	Short-circuit current	300% (3 IN) : 10s
Altitude	≤ 1000 m	Total Harmonic Distortion THD (**) in no-load	< 3.5 %
Overspeed	2250 R.P.M.	Total Harmonic Distortion THD (**) on linear load	< 3.5 %
Air flow	1.8 m³/s (50 Hz) / 2.2 m³/s (60 Hz)	Waveform: NEMA = TIF (**)	< 50


(*) Steady state (**) Total harmonic distortion between phases, no-load or on-load (non-distorting)

Ratings 50 Hz - 1500 R.P.M.

kVA / kW - P.F. = 0.8																	
Duty/T°C		Continuous duty/40°C				Continuous duty/40°C				Stand-by/40°C				Stand-by/27°C			
Class/T°K		H/125°K				F/105°K				H/150°K				H/163°K			
Phase		3 ph.				3 ph.				3 ph.				3 ph.			
Y		380V	400V	415V	440V	380V	400V	415V	440V	380V	400V	415V	440V	380V	400V	415V	440V
Δ		220V	230V	240V		220V	230V	240V		220V	230V	240V		220V	230V	240V	
6 wires version winding no. 6S																	
LSA 50.2 M6	kVA	1250	1250	1250	1190	1125	1125	1125	1095	1315	1315	1315	1275	1375	1375	1375	1330
	kW	1000	1000	1000	952	900	900	900	876	1052	1052	1052	1020	1100	1100	1100	1064
LSA 50.2 L7	kVA	1350	1350	1350	1260	1215	1215	1215	1150	1420	1420	1420	1365	1485	1485	1485	1425
	kW	1080	1080	1080	1008	972	972	972	920	1136	1136	1136	1092	1188	1188	1188	1140
LSA 50.2 L8	kVA	1450	1500	1500	1440	1320	1350	1350	1320	1520	1575	1575	1555	1595	1650	1650	1625
	kW	1160	1200	1200	1152	1056	1080	1080	1056	1216	1260	1260	1244	1276	1320	1320	1300
LSA 50.2 VL10	kVA	1600	1640	1600	1545	1455	1475	1455	1420	1680	1720	1680	1670	1760	1800	1760	1730
	kW	1280	1312	1280	1236	1164	1180	1164	1136	1344	1376	1344	1336	1408	1440	1408	1384
12 wires version winding no. 6 (option)																	
Y	380V	400V	415V	440V	380V	400V	415V	440V	380V	400V	415V	440V	380V	400V	415V	440V	
	220V	230V	240V		220V	230V	240V		220V	230V	240V		220V	230V	240V		
YY		200V		220V		200V		220V		200V		220V		200V		220V	
LSA 50.2 M6	kVA	1045	1100	1140	1210	940	990	1026	1089	1045	1100	1140	1210	1045	1100	1140	1210
	kW	836	880	912	968	752	792	821	871	836	880	912	968	836	880	912	968
LSA 50.2 L8	kVA	1250	1300	1350	1430	1125	1170	1215	1287	1250	1300	1350	1430	1250	1300	1350	1430
	kW	1000	1040	1080	1144	900	936	972	1030	1000	1040	1080	1144	1000	1040	1080	1144

Ratings 60 Hz - 1800 R.P.M.

kVA / kW - P.F. = 0.8																		
Duty/T°C		Continuous duty/40°C				Continuous duty/40°C				Stand-by/40°C				Stand-by/27°C				
Class/T°K		H/125°K				F/105°K				H/150°K				H/163°K				
Phase		3 ph.				3 ph.				3 ph.				3 ph.				
Y		380V	416V	440V	480V	380V	416V	440V	480V	380V	416V	440V	480V	380V	416V	440V	480V	
Δ		220V	240V			220V	240V			220V	240V			220V	240V			
6 wires version winding n°6S																		
LSA 50.2 M6		kVA	1285	1405	1455	1560	1155	1265	1310	1405	1350	1475	1530	1640	1410	1545	1600	1720
		kW	1028	1124	1164	1248	924	1012	1048	1124	1080	1180	1224	1312	1128	1236	1280	1376
LSA 50.2 L7		kVA	1375	1500	1555	1680	1240	1350	1400	1510	1440	1575	1630	1765	1510	1650	1710	1850
		kW	1100	1200	1244	1344	992	1080	1120	1208	1152	1260	1304	1412	1208	1320	1368	1480
LSA 50.2 L8		kVA	1485	1625	1720	1875	1335	1460	1550	1685	1560	1705	1805	1965	1630	1785	1890	2060
		kW	1188	1300	1376	1500	1068	1168	1240	1350	1250	1364	1444	1572	1304	1428	1512	1650
LSA 50.2 VL10		kVA	1635	1785	1860	2000	1470	1605	1675	1800	1715	1875	1950	2100	1800	1965	2050	2200
		kW	1308	1428	1488	1600	1176	1284	1340	1440	1372	1500	1560	1680	1440	1572	1640	1760
12 wires version winding n°6 (option)																		
Y		380V	416V	440V	480V	380V	416V	440V	480V	380V	416V	440V	480V	380V	416V	440V	480V	
Δ		220V	240V	240V		220V	240V	240V		220V	240V	240V		220V	240V	240V		
YY			208V	220V	240V		208V	220V	240V		208V	220V	240V		208V	220V	240V	
LSA 50.2 S4		kVA	990	1080	1145	1250	891	972	1030	1125	990	1080	1145	1250	990	1080	1145	1250
		kW	792	864	916	1000	713	778	824	900	792	864	916	1000	792	864	916	1000
LSA 50.2 M6		kVA	1210	1320	1400	1525	1089	1188	1260	1372	1210	1320	1400	1525	1210	1320	1400	1525
		kW	968	1056	1120	1220	871	950	1008	1098	968	1056	1120	1220	968	1056	1120	1220
LSA 50.2 L8		kVA	1430	1565	1655	1800	1287	1409	1490	1620	1430	1565	1655	1800	1430	1565	1655	1800
		kW	1144	1252	1324	1440	1029	1127	1192	1296	1144	1252	1324	1440	1144	1252	1324	1440



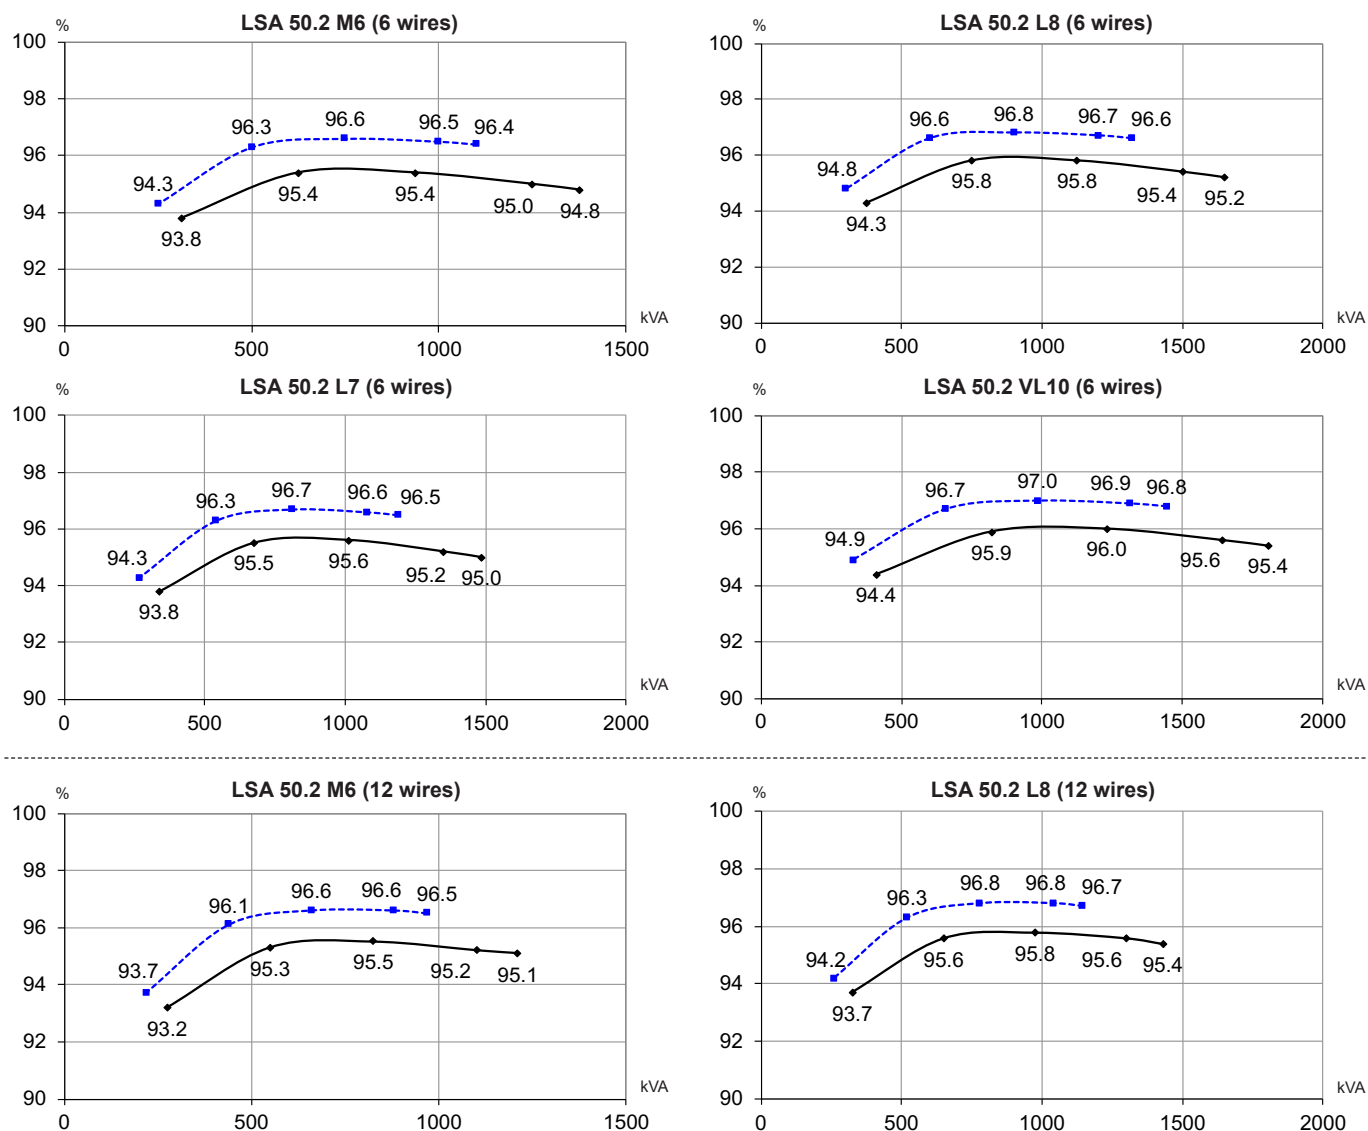
Efficiencies 400V - 50 Hz (— P.F.: 0.8) (--- P.F.: 1)

Reactances (%). Time constants (ms) - Class H / 400 V

		M6 (6w)	L7 (6w)	L8 (6w)	VL10 (6w)	M6 (12w)	L8 (12w)
Kcc	Short-circuit ratio	0.32	0.34	0.32	0.33	0.36	0.37
Xd	Direct-axis synchronous reactance unsaturated	392	364	378	362	345	329
Xq	Quadrature-axis synchronous reactance unsaturated	200	185	193	184	176	168
T'do	No-load transient time constant	3634	3750	3910	4058	3634	4247
X'd	Direct-axis transient reactance saturated	29.1	26.2	26.1	24.1	25.6	20.9
T'd	Short-circuit transient time constant	180	180	180	180	180	180
X''d	Direct-axis subtransient reactance saturated	16.5	14.8	14.8	13.6	14.5	11.8
T''d	Subtransient time constant	18	18	18	18	18	18
X''q	Quadrature-axis subtransient reactance saturated	17.3	15.5	15.4	14.2	15.2	13.4
Xo	Zero sequence reactance	0.8	0.72	0.72	0.66	0.71	0.58
X2	Negative sequence reactance saturated	16.92	15.21	15.14	13.94	14.89	12.67
Ta	Armature time constant	27	27	27	27	27	27

Other class H/400 V data








io (A)	No-load excitation current	0.82	0.85	0.78	0.78	0.82	0.79
ic (A)	On-load excitation current	3.6	3.48	3.38	3.26	3.21	3.02
uc (V)	On-load excitation voltage	45.2	43.7	42.4	40.8	40.4	37.9
ms	Response time ($\Delta U = 20\%$ transient)	500	500	500	500	500	500
kVA	Start ($\Delta U = 20\%$ cont. or 30% trans.)	2763	3324	3704	4387	2765	4003
%	Transient ΔU (on-load 4/4) - P.F.: 0.8 _{LAG}	13.6	12.5	12.5	11.7	12.3	10.5
W	No-load losses	14039	15299	15454	16552	14039	15322
W	Heat dissipation	52218	53790	57594	59458	43714	47854

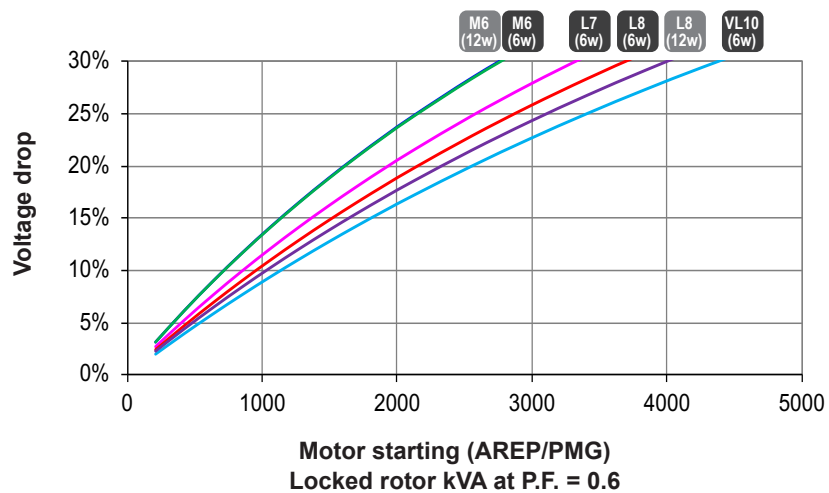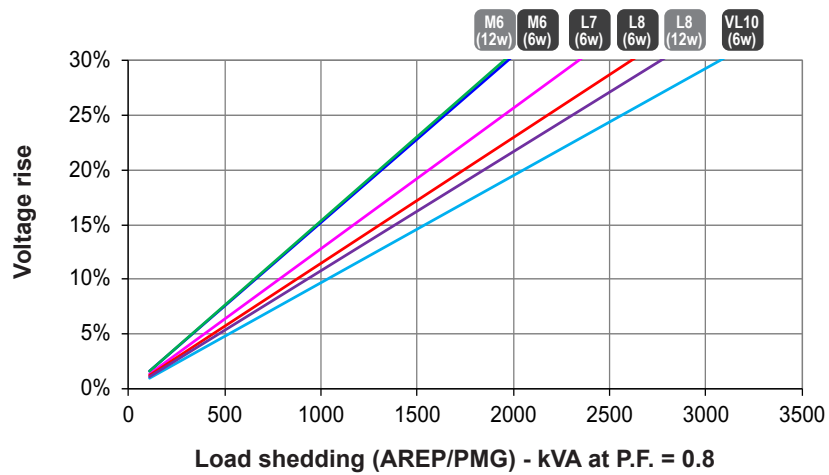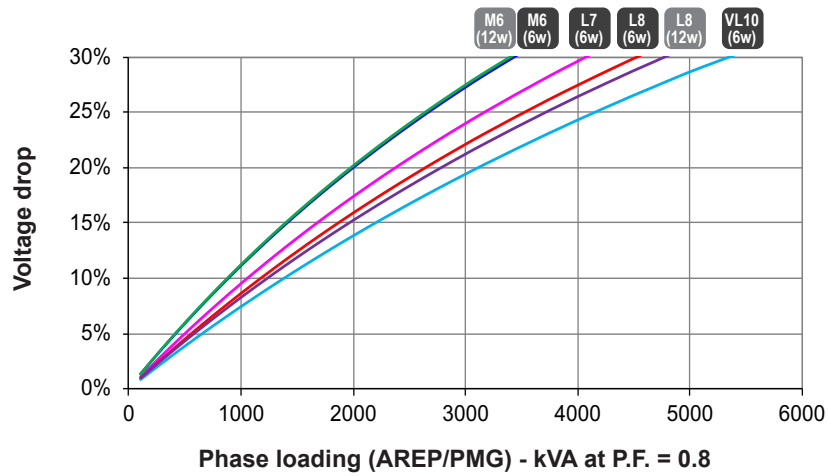Transient voltage variation 400V - 50 Hz



- 1) For a starting P.F. other than 0.6, the starting kVA must be multiplied by $K = \text{Sine P.F.} / 0.8$
- 2) For voltages other than 400V (Y), 230V(Δ) at 50 Hz, then kVA must be multiplied by $(400/U)^2$ or $(230/U)^2$.

Efficiencies 480V - 60 Hz (— P.F.: 0.8) (--- P.F.: 1)

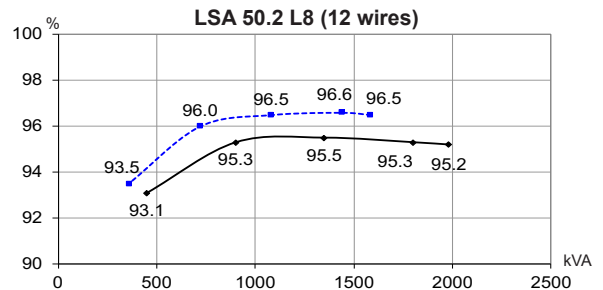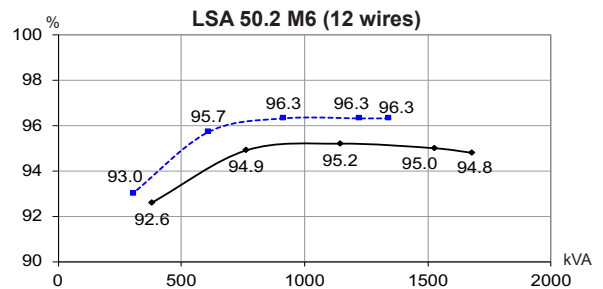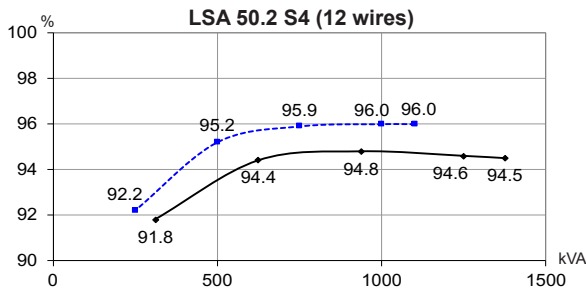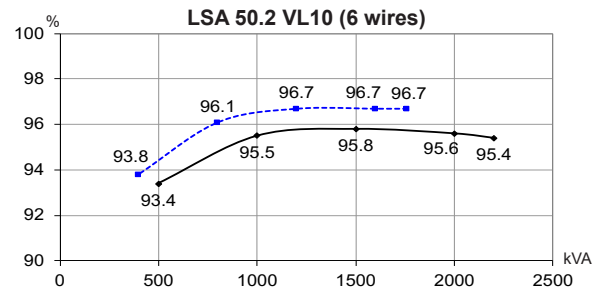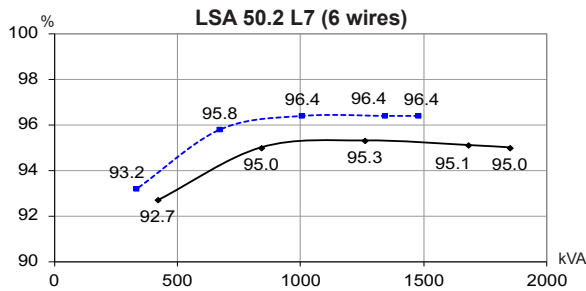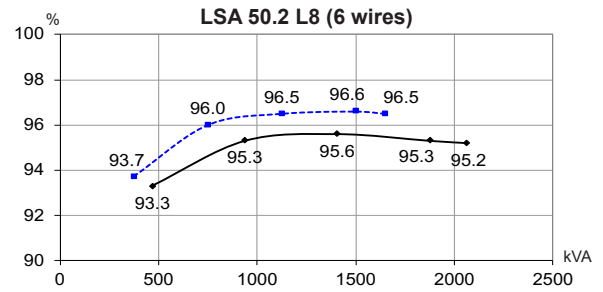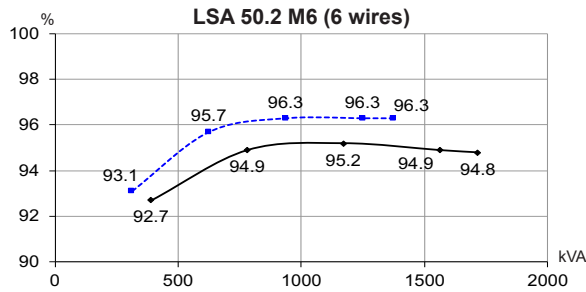




Reactances (%). Time constants (ms) - Class H / 480 V

	M6 (6w)	L7 (6w)	L8 (6w)	VL10 (6w)	S4 (12w)	M6 (12w)	L8 (12w)
Kcc Short-circuit ratio	0.31	0.33	0.3	0.32	0.3	0.31	0.32
Xd Direct-axis synchronous reactance unsaturated	407	377	394	368	394	398	380
Xq Quadrature-axis synchronous reactance unsaturated	208	192	201	187	201	203	193
T'do No-load transient time constant	3634	3750	3910	4058	3411	3634	4247
X'd Direct-axis transient reactance saturated	30.3	27.2	27.2	24.5	31.2	29.6	24.1
T'd Short-circuit transient time constant	180	180	180	180	180	180	180
X''d Direct-axis subtransient reactance saturated	17.1	15.4	15.4	13.8	17.7	16.7	13.7
T''d Subtransient time constant	18	18	18	18	18	18	18
X''q Quadrature-axis subtransient reactance saturated	18	16.1	16.1	14.4	18.6	17.6	15.5
Xo Zero sequence reactance	0.84	0.75	0.75	0.68	0.86	0.82	0.67
X2 Negative sequence reactance saturated	17.6	15.78	15.77	14.17	18.19	17.21	14.62
Ta Armature time constant	27	27	27	27	27	27	27

Other class H/480 V data

io (A) No-load excitation current	0.82	0.85	0.78	0.78	0.78	0.82	0.79
ic (A) On-load excitation current	3.69	3.56	3.47	3.27	3.49	3.61	3.38
uc (V) On-load excitation voltage	46.4	44.8	43.6	41	44	45.5	42.5
ms Response time ($\Delta U = 20\%$ transient)	500	500	500	500	500	500	500
kVA Start ($\Delta U = 20\%$ cont. or 30% trans.)	3305	3977	4433	5272	2578	3321	4803
% Transient ΔU (on-load 4/4) - P.F.: 0.8 _{LAG}	14	12.9	12.9	11.9	14.3	13.7	11.7
W No-load losses	22080	23864	24115	25675	20444	22080	23916
W Heat dissipation	65871	67848	72952	73168	56038	63910	69953

Transient voltage variation 480V - 60 Hz

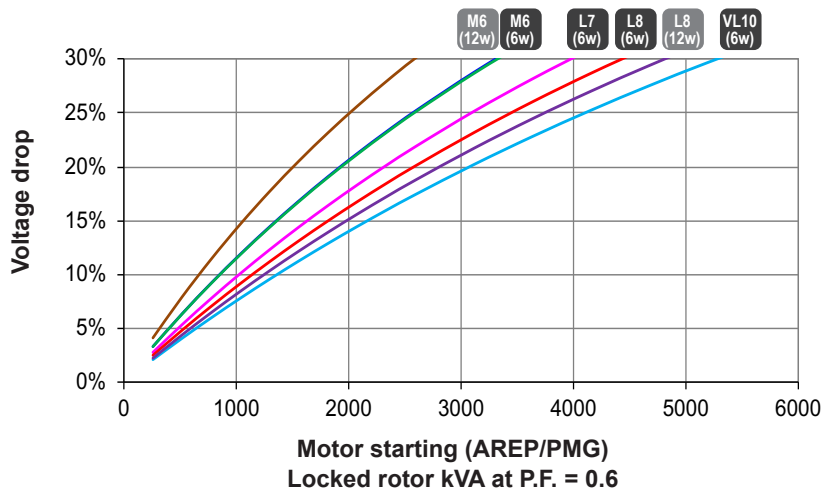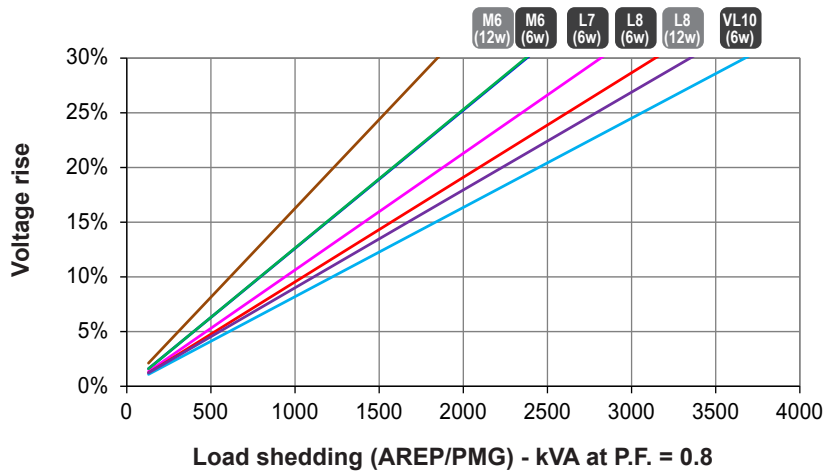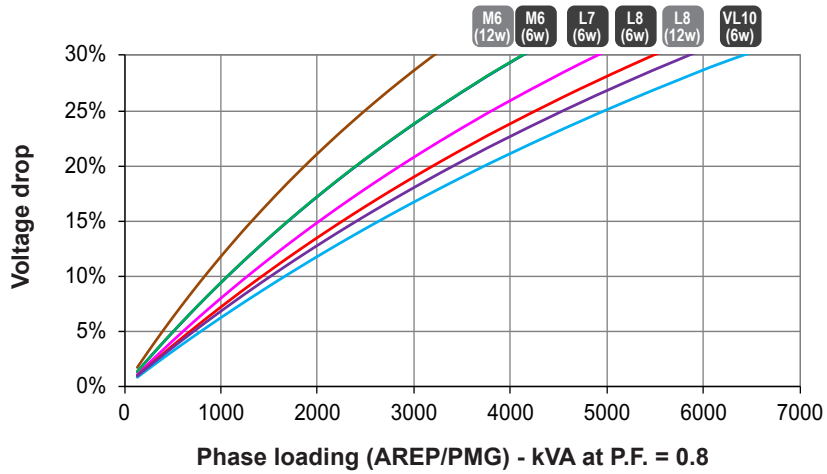


- 1) For a starting P.F. other than 0.6, the starting kVA must be multiplied by $K = \text{Sine P.F.} / 0.8$
- 2) For voltages other than 480V (Y), 277V (Δ), 240V (YY) at 60 Hz, then kVA must be multiplied by $(480/U)^2$ or $(277/U)^2$ or $(240/U)^2$.

3-phase short-circuit curves at no load and rated speed (star connection Y)


LSA 50.2 M6 (6 wires)

Symmetrical —
Asymmetrical - - -

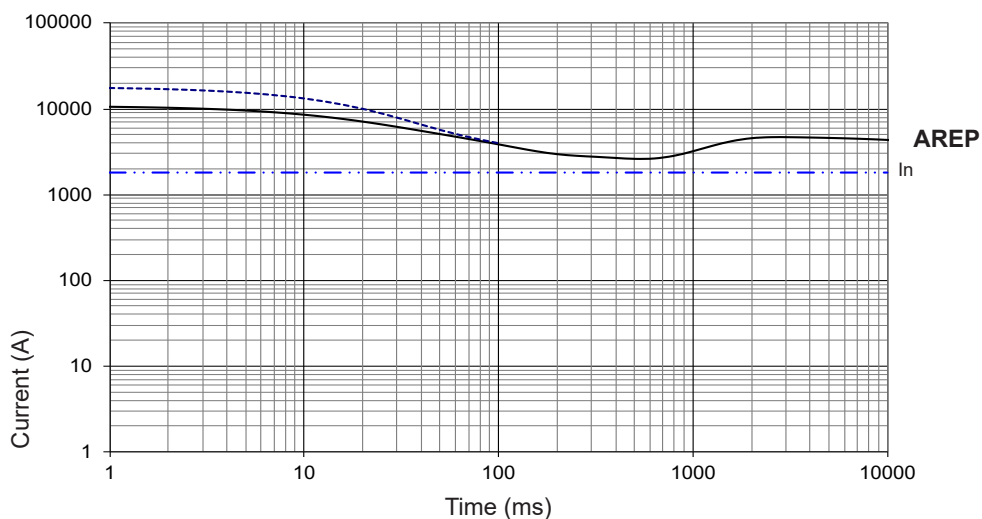


LSA 50.2 L7 (6 wires)

Symmetrical —
Asymmetrical - - -

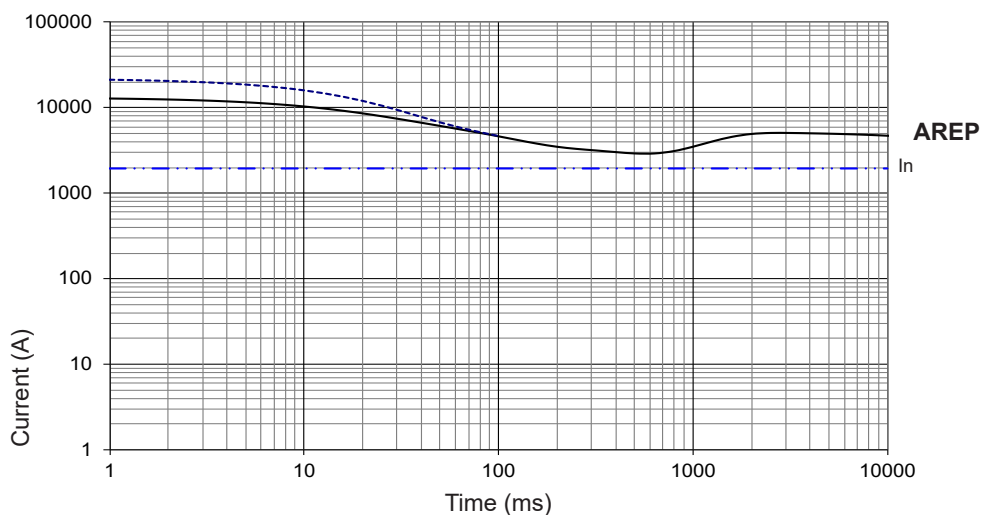

LSA 50.2 L8 (6 wires)

Symmetrical —
Asymmetrical - - -

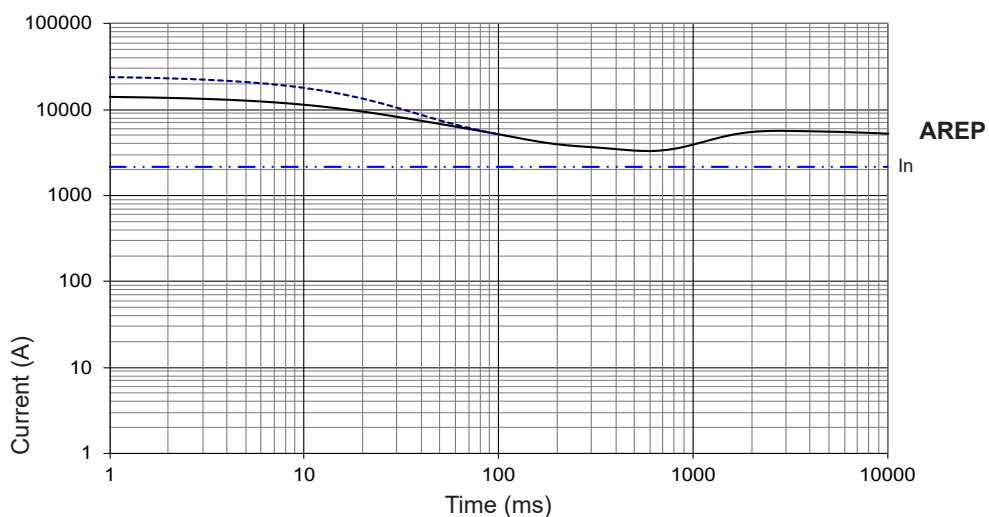


Influence due to connection

Curves shown are for star (Y) connection.

For other connections, use the following multiplication factors:

- Series delta : current value x 1.732 - Parallel star : current value x 2


3-phase short-circuit curves at no load and rated speed (star connection Y)

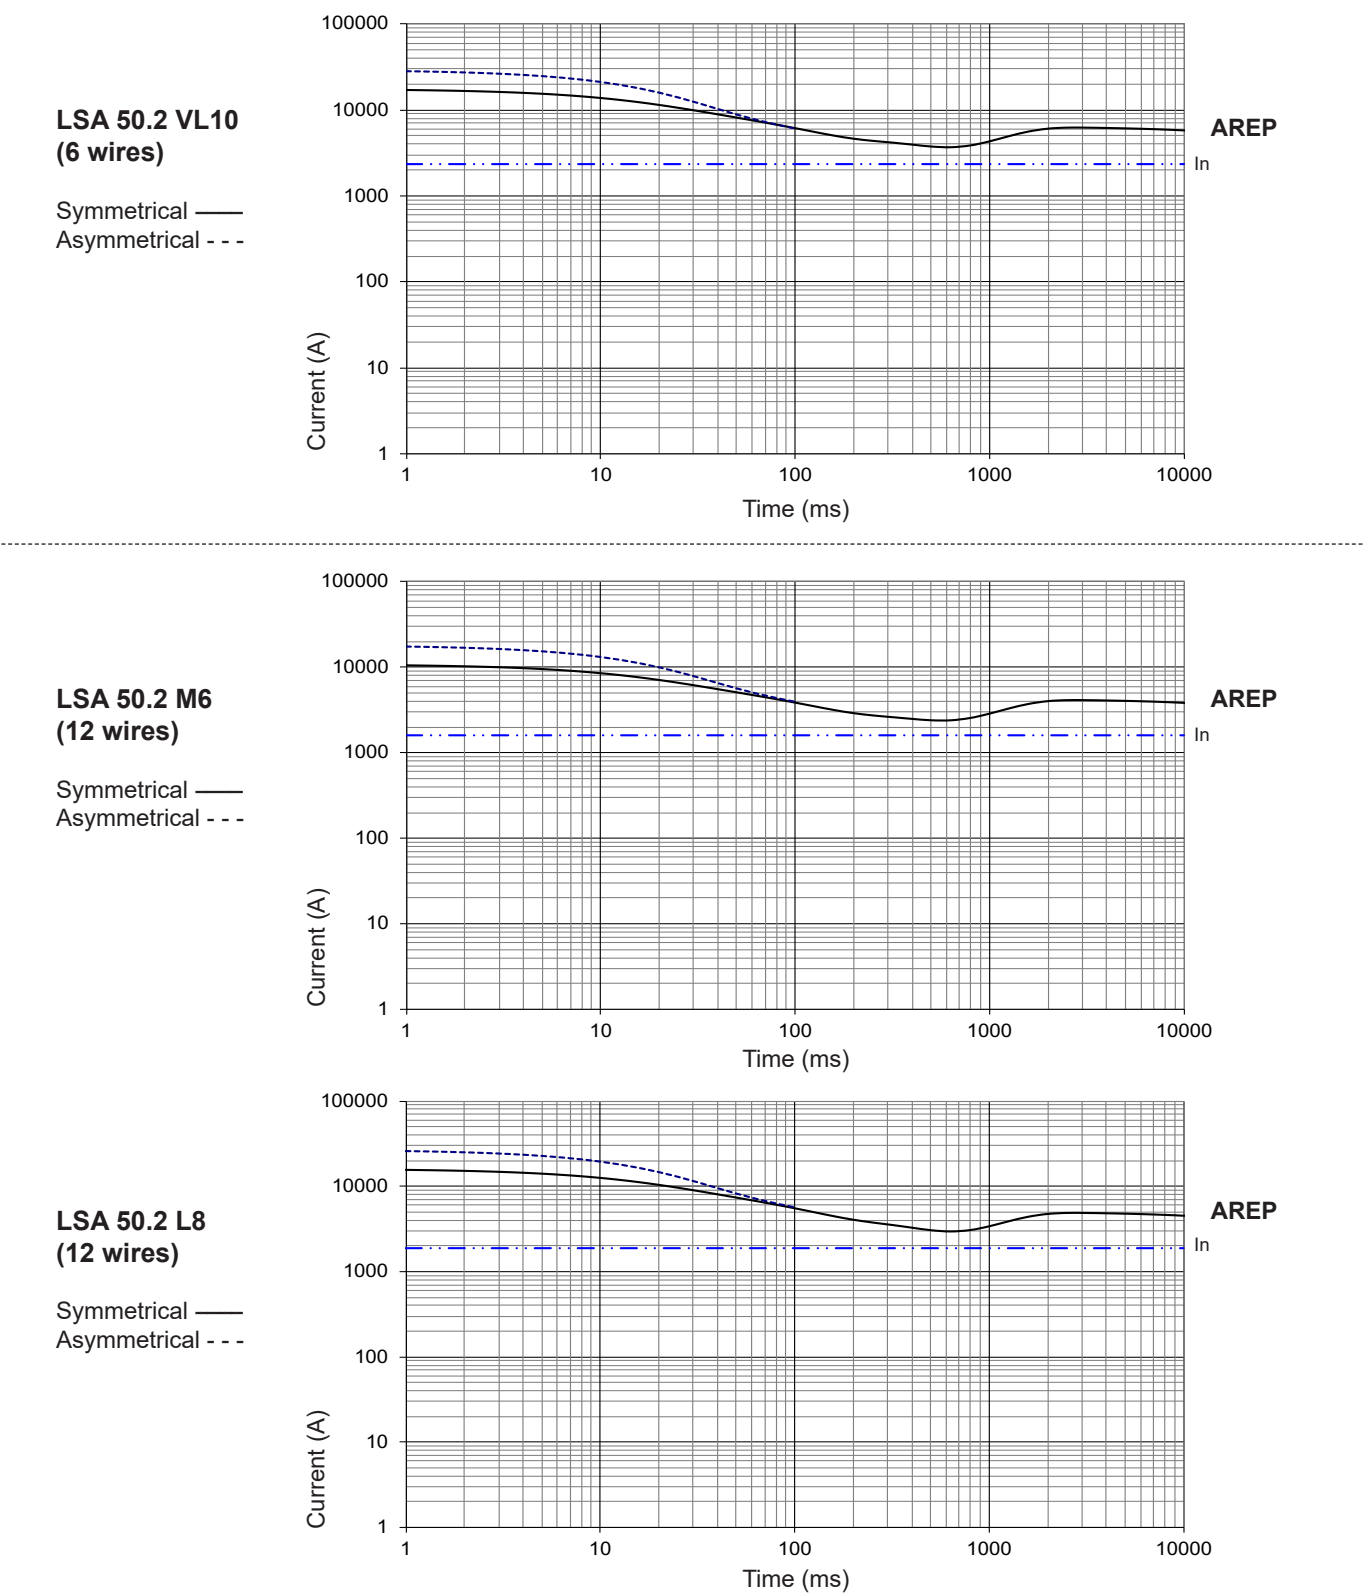

Influence due to short-circuit
Curves are based on a three-phase short-circuit.
For other types of short-circuit, use the following multiplication factors.

	3-phase	2-phase L/L	1-phase L/N
Instantaneous (max.)	1	0.87	1.3
Continuous	1	1.5	2.2
Maximum duration (AREP/PMG)	10 sec.	5 sec.	2 sec.


Two-bearing dimensions

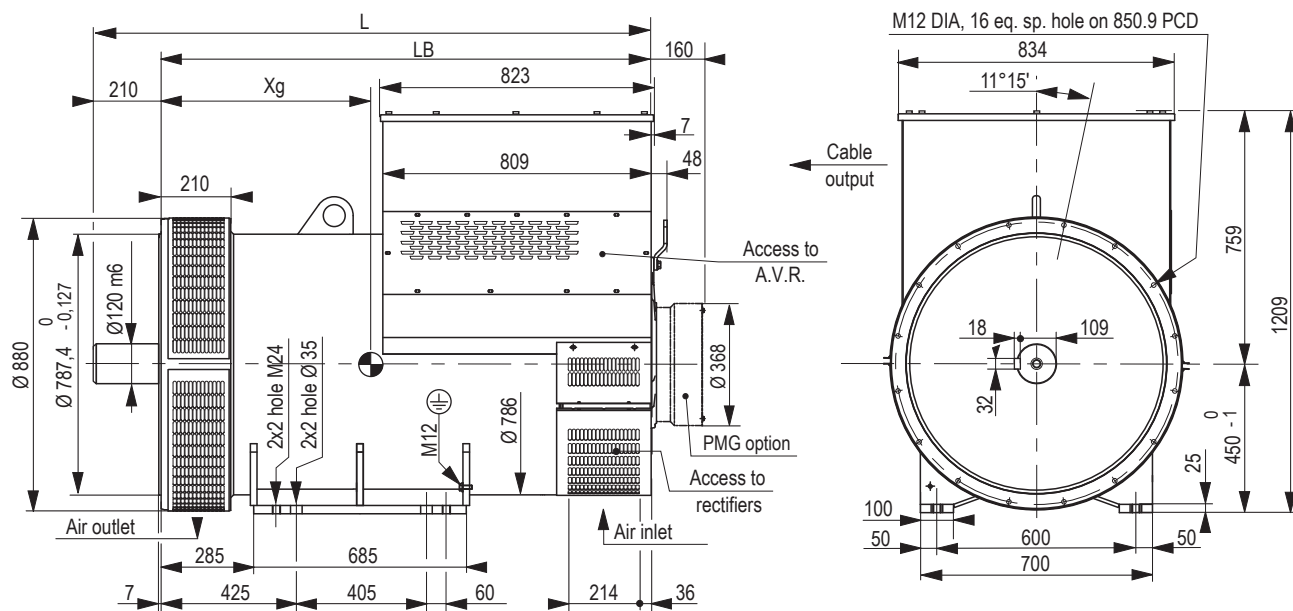

Dimensions (mm) and weight

Type	L without PMG	LB	Xg	Weight (kg)
LSA 50.2 S4	1488	1278	600	2330
LSA 50.2 M6	1588	1378	620	2530
LSA 50.2 L7	1688	1478	670	2800
LSA 50.2 L8	1688	1478	690	3010
LSA 50.2 VL10	1788	1578	740	3300

Torsional analysis data

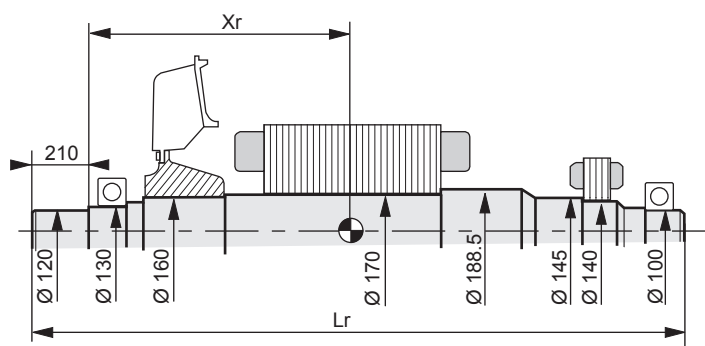

Centre of gravity: Xr (mm), Rotor length: Lr (mm), Weight: M (kg), Moment of inertia: J (kgm²): (4J = MD²)

Type	Xr	Lr	M	J
LSA 50.2 S4	567	1509	800	17.24
LSA 50.2 M6	610	1609	900	19.71
LSA 50.2 L7	645	1709	971	21.29
LSA 50.2 L8	668	1709	1049	23.66
LSA 50.2 VL10	715	1809	1159	26.33

NOTE : Dimensions are for information only and may be subject to modifications. Contractual 2D drawings can be downloaded from the Leroy-Somer site, 3D drawing files are available upon request.
The torsional analysis of the transmission is imperative. All values are available upon request.

LEROY-SOMERTM

www.leroy-somer.com/epg

Connect with us at:



Nidec
All for dreams

© 2024 Moteurs Leroy-Somer SAS. The information contained in this brochure is for guidance only and does not form part of any contract. The accuracy cannot be guaranteed as Moteurs Leroy-Somer SAS have an ongoing process of development and reserve the right to change the specification of their products without notice.

Moteurs Leroy-Somer SAS. Headquarters: Bd Marcellin Leroy, CS 10015, 16915 Angoulême Cedex 9, France. Share Capital: 32,239,235 €, RCS Angoulême 338 567 258.