


MOD

15720

L. Amador

DESCRIZIONE	QUANTITA'
NU 219 B-TVP2	1
6219 B3	1
16 SPARBOLE (12,5+12,5 x 32 x 50) EG362	16
TARA PUNERE $\sqrt{95}$	1

VISTO ACQUISTI



R.E.M. s.r.l.

Via Ferruccia, 16/a - 03010 Patrica (FR)

Tel. 0775 830116 - Fax 0775 839345

Email: rem-motori@messaggipec.it - Email: info@rem-motori.it

Email: amministrazione@rem-motori.it



Dasa-Rägister
EN ISO 9001:2008
IQ-0310-05

Misurazioni Sede

Commesso:

2022/0388

NUM. REM:

15120.....

Bearing:


NJ 219 E-TUP 2

Bearing position:

RIP. SEDE CUSCINETTO CALOGA SU CATO COMANDO

Application:

SIEMENS 166-6283

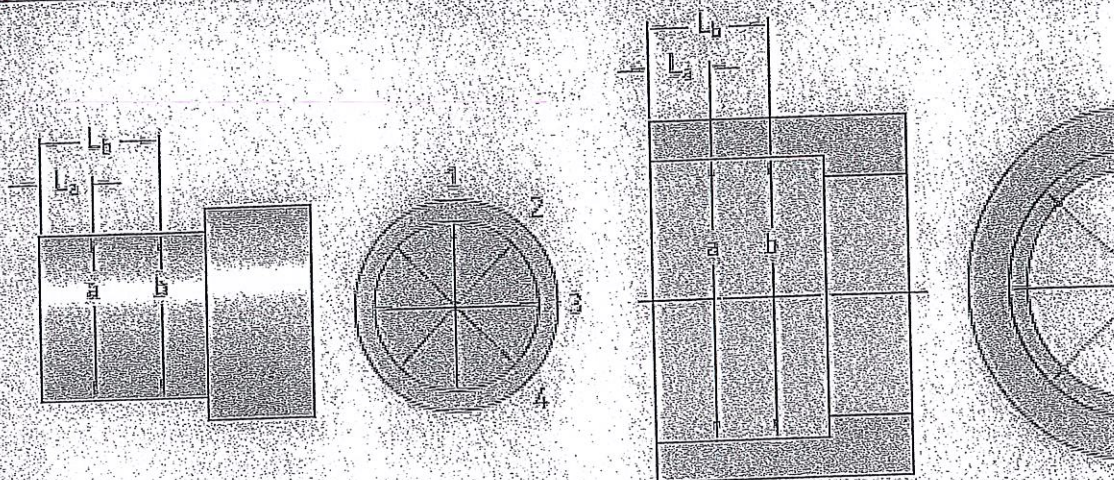


Measuring directions	Shaft Measurement values [mm] at plate				Housing Measurement values [mm] at plate		
	a	b	(c)	(d)	a	b	(c)
	Distance L				Distance L		
	Diameter d				Diameter D		
1					170,010		
2							
3							
4							
	Calculated mean: (1+2+3+4)/4				Calculated mean: (1+2+3+4)/4		

SKF

31-05-22

L. Lucchesi



R.E.M. s.r.l.

Via Ferruccia, 16/a - 03010 Patrica (FR)

Tel. 0775 830116 - Fax 0775 839345

Email: rem-motori@messaggipec.it - Email: info@rem-motori.it

Email: amministrazione@rem-motori.it



Dasa-Rägister
EN ISO 9001:2008
IQ-0310-05

Misurazioni Sede

Commissa: 2022/0383
NUM. REM. 15420

M.

Bearing:


6219 C3

Bearing position:

RIP. SEDE CONSUMATO SU CAJOTTA LATO COLTURA

Application:

SIEMENS 16G6258

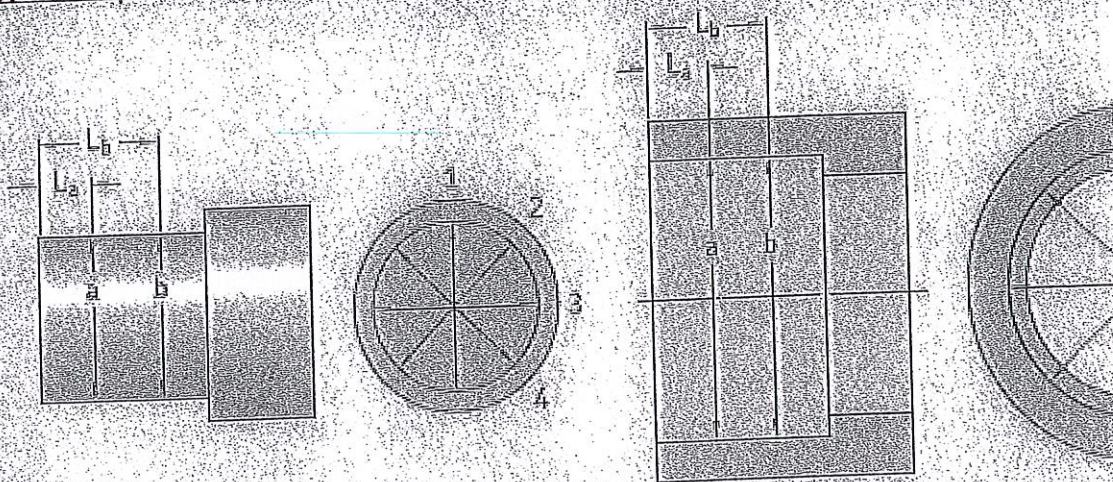

Measuring directions	Shaft Measurement values [mm] at place				Housing Measurement values [mm] at place		
	a	b	(c)	(d)	a	b	(c)
	Distance L				Distance L		
	Diameter d				Diameter D		
1					<u>170,010</u>		
2							
3							
4							
	Calculated mean: $(1+2+3+4)/4$				Calculated mean: $(1+2+3+4)/4$		

SKF

31-05-22

N. Amador