


QUOTE D'INGOMBRO MOTORIDUTTORI COASSIALI serie "RE"
doppia riduzione - con motori serie "MVT" e "MAT"

Esecuzione con piedi - Forma B3 (e B6, B7, B8, V5, V6)

Esecuzione con flangia - Forma B5 (e V1, V3)

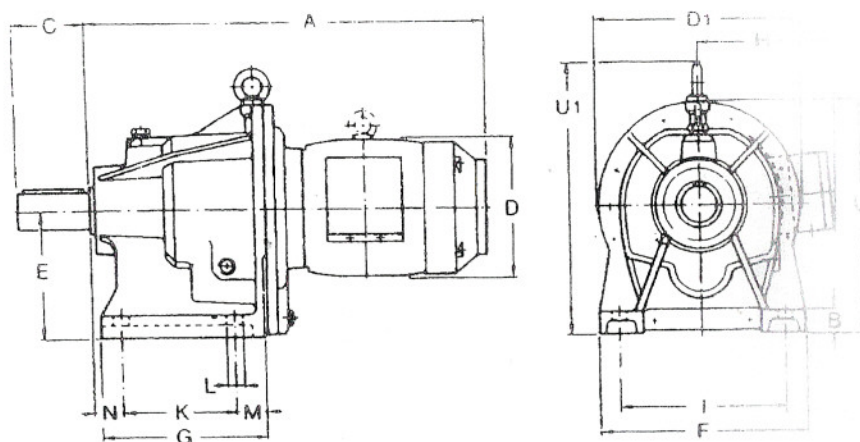

Per l'esecuzione flangiata le quote mancanti in figura sono comuni all'esecuzione con piedi.

Su richiesta possono essere forniti con flangia avente dimensioni DIN.

Tolleranze:


Quota R: k6 per $R \leq 50$; m6 per $R > 50$; G1: h6.

•) Valore di A per accoppiamento a motore autofrenante a disco.

OVERALL DIMENSIONS CO-AXIAL GEARMOTORS series "RE"
double reduction - with motor series "MVT" and "MAT"

Foot mounting - Form B3 (also B6, B7, B8, V5 and V6)

Flange mounting - Form B5 (also V1 and V3)

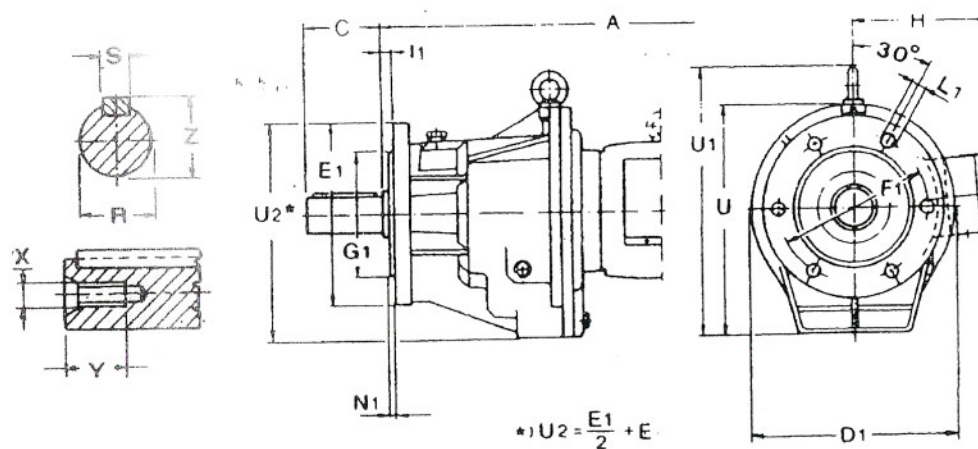

Dimensions not shown in the flange mounting picture are the same as for foot mounting.

Our gearmotors are also available with flanges to DIN dimensions on request.

Tolerances:

dimension R: k6 for $R \leq 50$; m6 for $R > 50$; G1: h6.

•) Value of A for coupling to brake motor.

FIMET

TIPO - TYPE		A	A*	B	C	D	D1	E	E1	F	F1	G	G1	H	I	I1	K	L	L1	M	N	N1	R	S	U	U1	Z	X	Y
R4E	MAT 80 C - A	469	535			165								150											280	334			
	MAT 90 S-L	511	579			185								160											280	334			
	MAT 100 L-LA	550	629			205								180											280	334			
	MAT 112 M	561	654	35	90	230	260	150	215	258	180	198	150	193	205	7,5	130	19	16,5	38	49	3,5	40	12	280	334	43	M16	36
	MAT 132 S	626	719			270								207											285	338			
	MAT 132 M	634	727			270								207											285	338			
	MAT 132 MA	660	753			270								207											285	338			
R5E	MAT 90 S - L	556	624			185								160											350	404			
	MAT 100 L-LA	595	654			205								180											350	404			
	MAT 112 M	606	699			230								193											350	404			
	MAT 132 S	671	764			270								207											350	404			
	MAT 132 M	679	772	35	110	270	310	195	270	310	220	253	180	207	250	8	175	21	21	47	39	4	55	16	350	404	59	M20	42
	MAT 132 MA	704	797			270								207											350	404			
	MAT 160 M-L-MC	781	-			330								236											360	410			
	MAT 180 M-L	834	-			330								253											360	410			
R6E	MAT 112 M	649	742			230								193											405				
	MAT 132 S	714	807			270								207											405				
	MAT 132 M	722	815			270								207											405				
	MAT 132 MA	774	867	40	130	270	350	230	330	360	270	295	210	207	300	9	200	24	25	55	49	5	65	18	405	470	69	M20	42
	MAT 160 M-L-MC	824	-			330								236											405				
	MAT 180 M-L	877	-			330								253											405				
	MVT 200 L	891	-			380								265											420				