
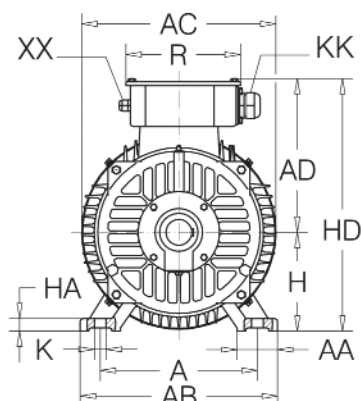




3.2. Serie GM trifase

3.2. GM series three-phase


B3

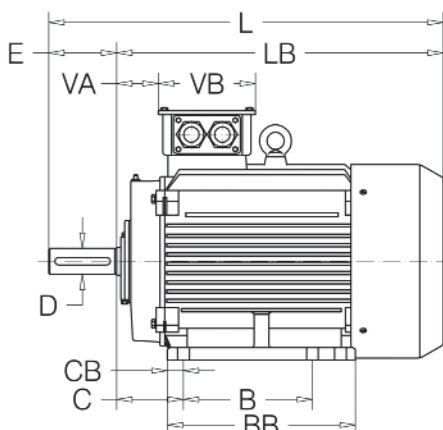

B5

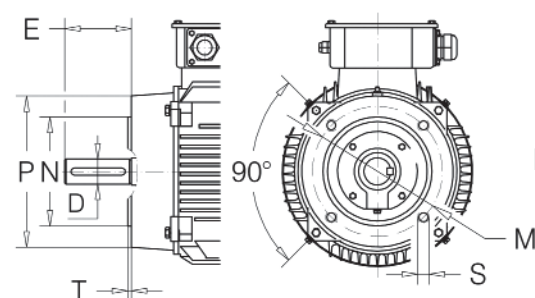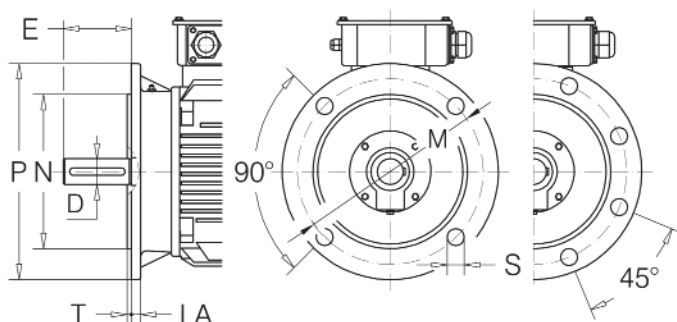

B14

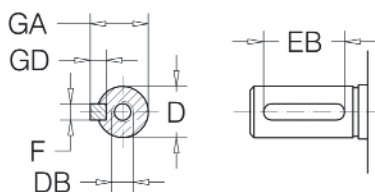

Estremità d'albero
Shaft end

Dis. 3.2 / Draw. 3.2

Tab. 3.3 / Tab. 3.3

Motore Motor GM			Ingombri Principali Main Overall Dimensions					Piedi Feet								Flangia Flange									
			AC	AD	H	HD	LB	L	A	B	C	AB	BB	AA	CB	HA	K	IM	M	N _{j6}	P	LA	T	S	
160	M	2-4-6	314	251	160	411	479 523	589 633	254	210 254	108	320	260 304	65	26	20	15	B5 B14	300 215	250 180	350 250	15 --	5 4	N°4 N°4 M12	19
180	M	2-4 4-6	355	267	180	447	542 581	652 691	279	241 279	121	350	311 349	70	35	22	15	B5	300	250	350	15	5	N°4	19
200	L	2-4-6	397	300	200	500	636	746	318	305	133	390	370	70	32	25	18	B5	350	300	400	17	5	N°4	19
225	S	4	446	325	225	550	645	785	356	286	149	432	370	75	46	28	19	B5	400	350	450	20	5	N°8	19
225	M	2 4-6	446	325	225	550	670	780 810	356	311	149	433	395	75	46	28	19	B5	400	350	450	20	5	N°8	19
250	M	2-4-6	485	360	250	610	760	900	406	349	168	486	445	80	55	30	24	B5	500	450	550	22	5	N°8	19
280	S	2 4-6	547	390	280	670	784 824	924 964	457	368	190	545	485	85	69	35	24	B5	500	450	550	22	5	N°8	19
280	M	2 4-6	547	390	280	670	835 875	975 1015	457	419	190	545	536	85	69	35	24	B5	500	450	550	22	5	N°8	19
315	S	2 4-6	620	530	315	845	1060	1200 1230	508	406	216	630	570	120	84	45	28	B5	600	550	660	22	6	N°8	24
315	M	2 4-6	620	530	315	845	1170	1310 1340	508	457	216	630	680	120	84	45	28	B5	600	550	660	22	6	N°8	24
315	L	2 4-6	620	530	315	845	1170	1310 1340	508	508	216	630	680	120	84	45	28	B5	600	550	660	22	6	N°8	24
355	M	2 4-6	698	645	355	1000	1360	1500 1570	610	560	254	730	750	120	68	52	28	B5	740	680	800	25	6	N°8	24
355	L	2 4-6	698	645	355	1000	1360	1500 1570	610	630	254	730	750	120	68	52	28	B5	740	680	800	25	6	N°8	24
355	X	2 4-6	770	765	355	1120	1710	1850 1920	630	800	224	760	1140	135	88	52	35	B5	840	780	900	28	6	N°8	24
400	M	4-6	860	680	400	1080	1770	1980	686	630	280	806	1090	120	57	45	35	B5	940	880	1000	25	6	N°8	28