




# Data sheet

## PSC6

RS Stock No. 370-6593

ENGLISH

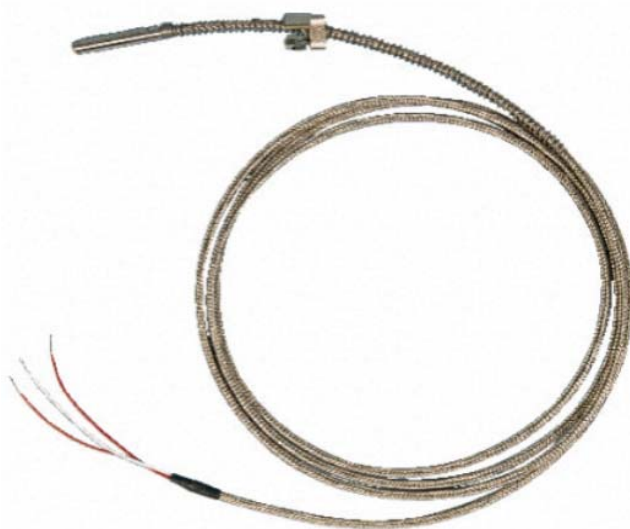

### RANGE :

- -50 / 250°C

### USE :

- 

### KEY POINT :

- 

### SPECIFICATIONS :

- 1xPT 100 ohm at 0°C class A
- 3 Fils assembly
- Obstruct tube Ø6x35mm in 316L SS
- Thread ½" GCY
- Bayonet lock Ø10.5 x 14 mm in 316L SS,compression sprint assembly

### DIMENSIONS :

- Length = 2000 mm
- Diameter = Ø6 mmx

### METROLOGICAL DATA :

- Classe B :  
IEC 751 norme  
General tolerance PT100 class B:  $\pm 0.30 + 0.005 \cdot [t^{\circ}C]$