


Ventilatori radiali



MOD. LAMIERA ZINCATA

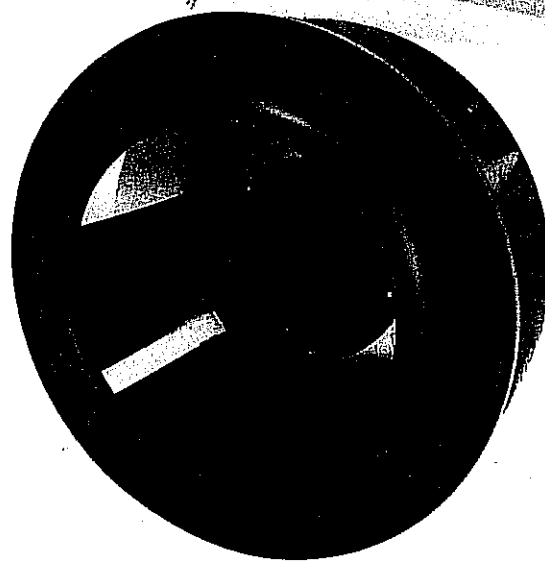

MOD. PLASTICA

Motore 220/240 Volt, 50/60 Hz, 2.300 giri/min, 2 poli

DIAM. A	PALA H.	MATERIALE VENTOLA	WATT	AMP.	COND. μ F	PORTATA M ³ /H	PREVALENZA
150	11	PLASTICA	36,0	0,12	1,0	132,0	70,0
190	45	PLASTICA	64,6	0,27	2,0	351,8	150,0
220	44	PLASTICA	83,1	0,33	2,5	322,0	210,0
225	50	LAMIERA ZINCATA	133,5	0,54	4,0	525,4	295,0
225	63	LAMIERA ZINCATA	151,2	0,62	4,0	666,0	265,0
225	63	LAMIERA ZINCATA	171,5	0,71	6,0	1050,8	100,0
250	56	LAMIERA ZINCATA	161,0	0,66	4,0	1021,0	165,0
250	56	PLASTICA	202,0	0,84	6,0	840,0	300,0
280	50	LAMIERA ZINCATA	291,0	1,21	8,0	821,4	370,0
180	40	LAMIERA ZINCATA	66,1	0,28	2,0	428,8	80,0
225	63	LAMIERA ZINCATA	61,5	0,23	2,0	210,0	105,0
250	56	LAMIERA ZINCATA	71,0	0,29	3,0	457,0	100,0
315	100	LAMIERA ZINCATA	136,0	0,55	5,0	1147,0	150,0
280	79	LAMIERA ZINCATA	89,0	0,35	3,0	660,0	120,0
315	100	PLASTICA	144,0	0,32	TRIFASE	833,6	200,0
355	126	PLASTICA	320,0	1,40	6,0	2038,0	150,0
315	100	PLASTICA	146,6	0,32	TRIFASE	1010,6	180,0
355	126	PLASTICA	306,0	1,34	6,0	1277,0	240,0
400	140	PLASTICA	528,0	2,76	5,0	2632,0	300,0
450	160	PLASTICA	694,0	1,40	-	2518,0	422,0

N.B. Condensatore incluso

Le caratteristiche tecniche indicate sono testate con un funzionamento a centro curva.