



Elettropompe sommergibili con girante monocanale Submersible pumps with single-channel impeller

CARATTERISTICHE TECNICHE / TECHNICAL PERFORMANCES

Modello - Model	P2		P1 (kW)	Ampere		Q (m³/h - l/min)											
1ph				3ph	0,6	6	12	18	24	30	36	42	48	54	60		
					10	100	200	300	400	500	600	700	800	900	1000		
400V - 50Hz Trifase Three-phase	(kW)	(HP)				H (m)											
SMG 100T	0,75	1,00	1,00	-	1,7	13	11,4	9	5,5	2							
SMG 150T	1,10	1,50	1,10	-	2,1	14	13	11	8	4,3	1						
SMG 200T	1,50	2,00	1,60	-	2,9	16	15	13,4	11,5	9,3	6,8	3,8	1				
SMG 300T	2,20	3,00	2,50	-	4,5	19	18	16,7	15,3	13,7	12	10	8	5,5	3	0,3	

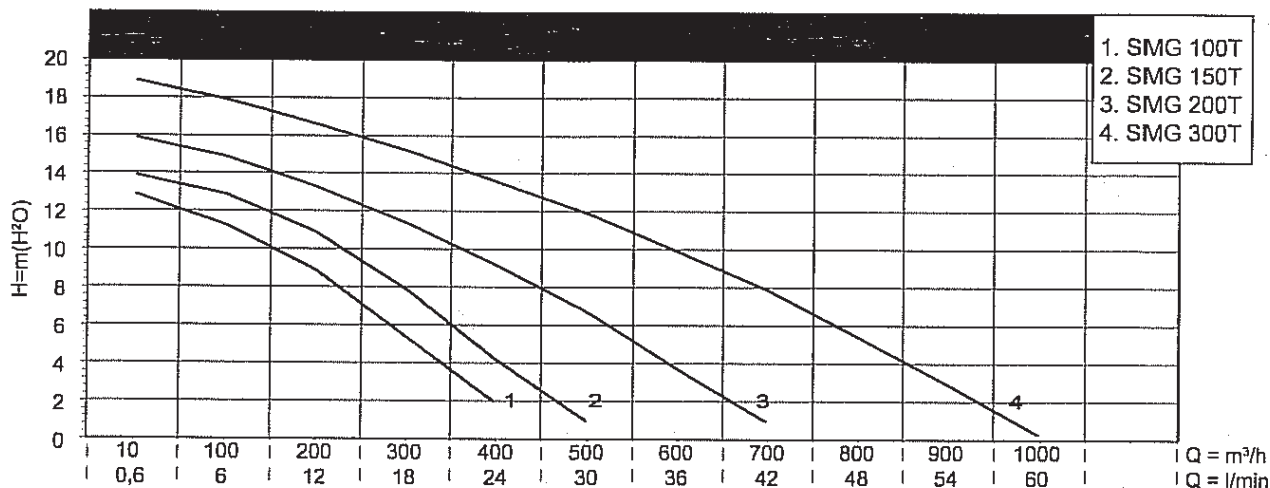

Modello - Model	P2		P1 (kW)	Ampere		Q (m³/h - l/min)											
1ph				3ph	0,6	12	24	36	48	60	72	84	96	108	120	132	
					10	200	400	600	800	1000	1200	1400	1600	1800	2000	2200	
400V - 50Hz Trifase Three-phase	(kW)	(HP)				H (m)											
SMG 400T	3,00	4,00	3,50	-	6,4	20	17,8	15	12,4	9,4	6	2					
SMG 550T	4,00	5,50	4,60	-	8,4	24	22	20	17,7	15	11,9	8	4,5	0,2			
SMG 750T	5,50	7,50	5,80	-	9,6	26	24	22,4	20,5	18	15,4	12,6	9	5	0,4		
SMG 1000T	7,50	10,00	7,50	-	12,8	32	31	29,5	27,5	25,6	23	20	17	13,5	9,4	5	0,2

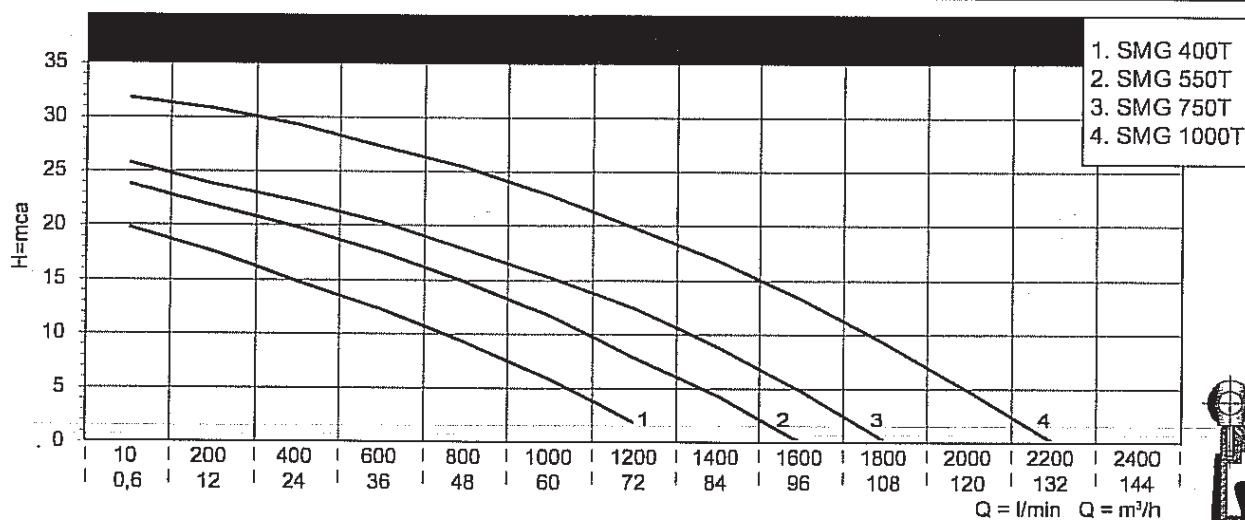

Modello - Model	Dimensioni - Dimensions			DNM	Passaggio solidi Solids passage (mm)	kg
	A	B	C			
SMG 100	480	240	270	50	35	33
SMG 150	480	240	270	50	40	34
SMG 200	560	280	320	65	45	44
SMG 300	560	280	320	65	45	47
SMG 400	650	335	350	80	60	73
SMG 550	650	335	350	80	60	75
SMG 750	750	350	430	100	65	126
SMG 1000	750	350	430	100	65	130

