





Alu.housing

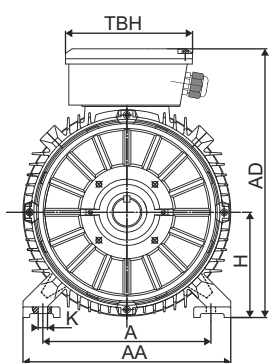



C.I.housing

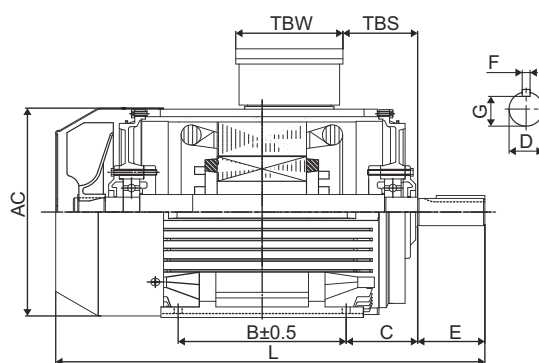



IM B3

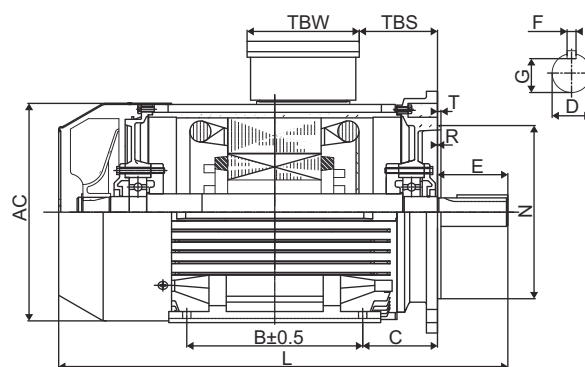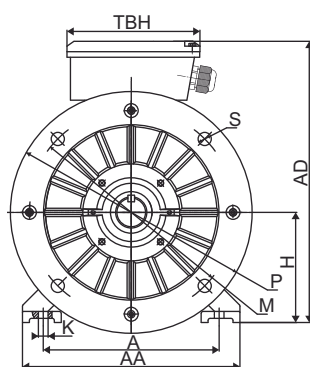

IM B35

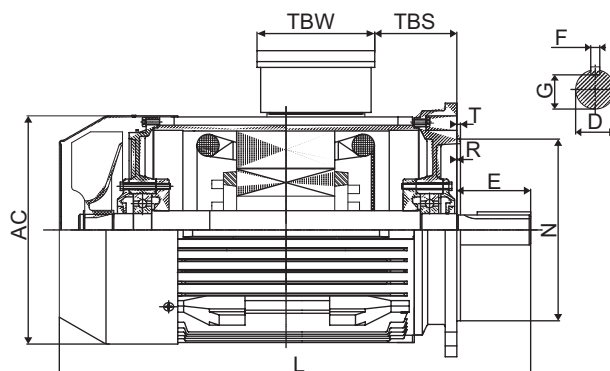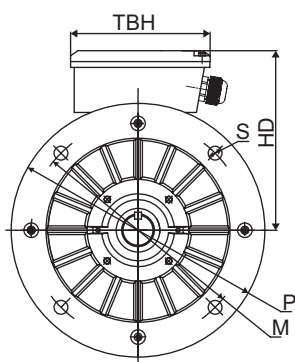

IM B5

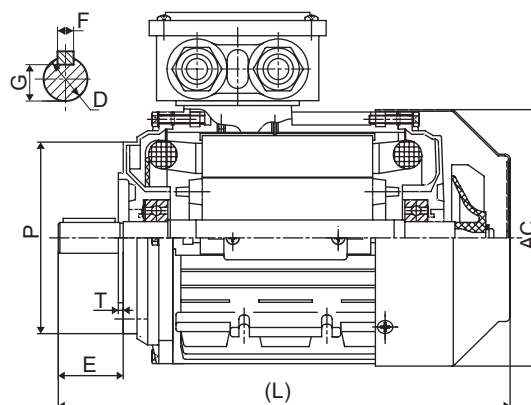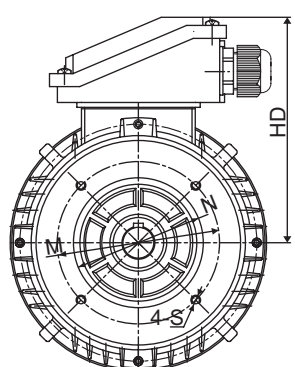

IM B14

DIMENSIONI DI INGOMBRO ED INSTALLAZIONE

Frame		Foot Mounting				Shaft					General							
		H	A	B	C	D	E	F	G	K	AA	AD	HD	AC	L	TBS	TBW	TBH
80		80	125	100	50	Φ19	40	6	15.5	Φ9	160	220	140	Φ158	280	16	97	97
90S/L		90	140	100/125	56	Φ24	50	8	20	Φ10	175	240	150	Φ176	325/350	16	97	97
100		100	160	140	63	Φ28	60	8	24	Φ12	200	265	165	Φ199	388	20	118	118
112		112	190	140	70	Φ28	60	8	24	Φ12	230	291	179	Φ220	405	29	118	118
132S/M		132	216	140/178	89	Φ38	80	10	33	Φ12	255	332	200	Φ259	467/505	29	118	118
160M/L		160	254	210/254	108	Φ42	110	12	37	Φ15	314	402	242	Φ313	605/650	91	162	187
180M/L		180	279	241/279	121	Φ48	110	14	42.5	Φ15	348	439	259	Φ360	687/725	160/180	162	187
200L		200	318	305	133	Φ55	110	16	49	Φ19	388	497	297	Φ399	768	192	186	233
225S	4,8	225	356	286	149	Φ60	140	18	53	Φ19	436	553	328	Φ465	814	190	186	233
225M	2	225	356	311	149	Φ55	110	16	49	Φ19	436	553	328	Φ465	809	202	186	233
	4,6,8	225	356	311	149	Φ60	140	18	53	Φ19	436	553	328	Φ465	839	202	186	233
250M	2	250	406	349	168	Φ60	140	18	53	Φ24	484	616	366	Φ506	918	233	218	260
	4,6,8	250	406	349	168	Φ65	140	18	58	Φ24	484	616	366	Φ506	918	233	218	260
280S/M	2	280	457	368/419	190	Φ65	140	18	58	Φ24	557	668	388	Φ559	984/1035	265	218	260
	4,6,8	280	457	368/419	190	Φ75	140	20	67.5	Φ24	557	668	388	Φ559	984/1035	265	218	260
315S	2	315	508	406	216	Φ65	140	18	58	Φ28	630	840	525	Φ680	1160	130	350	430
	4,6,8	315	508	406	216	Φ80	170	22	71	Φ28	630	840	525	Φ680	1190	130	350	430
315M/L	2	315	508	457/508	216	Φ65	140	18	58	Φ28	630	840	525	Φ680	1310	130	350	430
	4,6,8	315	508	457/508	216	Φ80	170	22	71	Φ28	630	840	525	Φ680	1340	130	350	430
355M/L	2	355	610	560/630	254	Φ75	140	20	67.5	Φ28	740	920	565	Φ820	1770	180	350	430
	4,6,8	355	610	560/630	254	Φ95	170	25	86	Φ28	740	920	565	Φ820	1840	180	350	430

Frame		Bearings		Cable Gland	B5						B14					
		Drive End	Non-Drive End		N	M	P	S	T	R	N	M	P	S	T	R
80		6204ZZ		1-M20×1.5	Φ130	Φ165	Φ200	4-Φ12	3.5	0	Φ80	Φ100	Φ118	M6	3	0
90S/L		6205ZZ		1-M20×1.5	Φ130	Φ165	Φ200	4-Φ12	3.5	0	Φ95	Φ115	Φ138	M8	3	0
100		6206ZZ		1-M20×1.5	Φ180	Φ215	Φ250	4-Φ15	4	0	Φ110	Φ130	Φ158	M8	3.5	0
112		6306ZZ		2-M25×1.5	Φ180	Φ215	Φ250	4-Φ15	4	0	Φ110	Φ130	Φ158	M8	3.5	0
132S/M		6308ZZ		2-M25×1.5	Φ230	Φ265	Φ300	4-Φ15	4	0	Φ130	Φ165	Φ198	M10	3.5	0
160M/L		6309C3		2-M32×1.5	Φ250	Φ300	Φ350	4-Φ19	5	0						0
180M/L		6311C3		2-M32×1.5	Φ250	Φ300	Φ350	4-Φ19	5	0						0
200L		6312C3		2-M40×1.5	Φ300	Φ350	Φ400	4-Φ19	5	0						0
225S	4,8	6313C3		2-M50×1.5	Φ350	Φ400	Φ450	8-Φ19	5	0						0
225M	2				Φ350	Φ400	Φ450	8-Φ19	5	0						0
	4,6,8				Φ350	Φ400	Φ450	8-Φ19	5	0						0
250M	2	6314C3		2-M50×1.5	Φ400	Φ500	Φ550	8-Φ19	5	0						0
	4,6,8				Φ400	Φ500	Φ550	8-Φ19	5	0						0
280S/M	2	6316C3		2-M50×1.5	Φ400	Φ500	Φ550	8-Φ19	5	0						0
	4,6,8				Φ400	Φ500	Φ550	8-Φ19	5	0						0
315S/M/L	2	6314C3		2-M63×1.5	Φ550	Φ600	Φ660	8-Φ24	6	0						0
	4,6,8	NU319	6319C3		Φ550	Φ600	Φ660	8-Φ24	6	0						0
355M/L	2	6319C3		2-M63×1.5	Φ680	Φ740	Φ800	8-Φ24	6	0						0
	4,6,8	NU322	6322C3		Φ680	Φ740	Φ800	8-Φ24	6	0						0