

2.10 Dimensioni

2.10 Dimensions

2.10 Abmessungen

	TA... - TC... - TF...													
	80C			100C			125C		160C		180C		200C	
A	160			200			250		320		360		400	
a	82			102			127		162.5		185		204	
a1	106			134			169		217		207		277.5	
B	127			150			175		215		255		290	
b	104			125			145		180		210		240	
C2	130			155			180		220		260		300	
D1 h6	14			19			24		28		28		38	
D2 H7	32	30	35	42	40	45	55	50	70	60	90	80	100	90
E	306			384			479		609.5		652		766.5	
e	42			52			67		90		100		115	
F	11			13			15		17		19		21	
f	M10x16			M12x19			M14x22		M16x25		M18x35		M18x30	
G	135			170			214		280		310		350	
g	67.5			85			107		140		155		175	
H	80			100			125		160		180		200	
h	256			314			389		479.5		502		604	
I	110			130			160		190		190		237.5	
i	213.5			269			336		429.5		447		541.5	
L1	30			40			50		60		60		80	
O	146			184			229		289.5		312		366.5	
T	366			454			564		699.5		742		884	
t	220			270			335		410		430		517.5	
Z	11			13			16		20		22		25	

TA..						
kg	19	36	66	120	170	260

TC... - TF...						
kg	22	41	76	137	190	295


TC...											
80C				100C				125C			
IEC	63 B5	71 B5	80/90 B5	80 B14	71 B5	80/90 B5	*90 B14	100/112 B5	80/90 B5	100/112 B5	132 B5
Y	140	160	200	120	160	200	□ 120 / R 73	250	200	250	300
P	259	266	286	286	322	342	342	352	413	423	445
p	113	120	140	140	138	158	158	168	184	194	216
Q	339	346	366	366	422	442	442	452	538	548	570
q	193	200	220	220	238	258	258	268	309	319	341

	160C				180C				200C			
IEC	80/90B5	100/112 B5	132 B5	160/180 B5	80/90 B5	100/112 B5	132 B5	160/180 B5	100/112 B5	132 B5	160/180 B5	200 B5
Y	200	250	300	350	200	250	300	350	250	300	350	400
P	493	503	525	555	516	526	548	578	617 / 627 (i=40-160) / (i=200-315)	637 / 647 (i=40-160) / (i=200-315)	667 / 677 (i=40-160) / (i=200-315)	
p	204	214	236	266	204	214	236	266	250 / 260 (i=40-160) / (i=200-315)	270 / 280 (i=40-160) / (i=200-315)	300 / 310 (i=40-160) / (i=200-315)	
Q	653	663	686	715	696	706	728	758	617 / 627 (i=40-160) / (i=200-315)	837 / 647 (i=40-160) / (i=200-315)	867 / 877 (i=40-160) / (i=200-315)	
q	364	374	396	426	384	394	416	446	450 / 460 (i=40-160) / (i=200-315)	470 / 480 (i=40-160) / (i=200-315)	500 / 510 (i=40-160) / (i=200-315)	



* Flange quadrate / Square flanges / Viereckige Flansche

TF...											
80C				100C				125C			
IEC	63 B5	71 B5	80/90 B5	71 B5	80/90 B5	100/112 B5	80/90 B5	100/112 B5	132 B5		
Y	140	160	200	160	200	250	200	250	300		
P	313	320	341	388	409	419	494	504	525		
p	167	174	195	204	225	235	265	275	296		
Q	393	400	421	488	509	519	619	629	650		
q	247	254	275	304	325	335	390	400	421		


	160C				180C				200C			
IEC	80/90 B5	100/112 B5	132 B5	160/180 B5	80/90 B5	100/112 B5	132 B5	160/180 B5	100/112 B5	132 B5	160/180 B5	200 B5
Y	200	250	300	350	200	250	300	350	250	300	350	400
P	594	604	625	655	617	627	648	678	750	770	800	802
p	305	315	336	366	305	315	336	366	383.5	404	434	436
Q	754	764	785	815	797	807	828	858	950	970	1000	1002
q	465	475	496	526	485	495	516	546	583.5	604	634	636




T..80C - T..200C

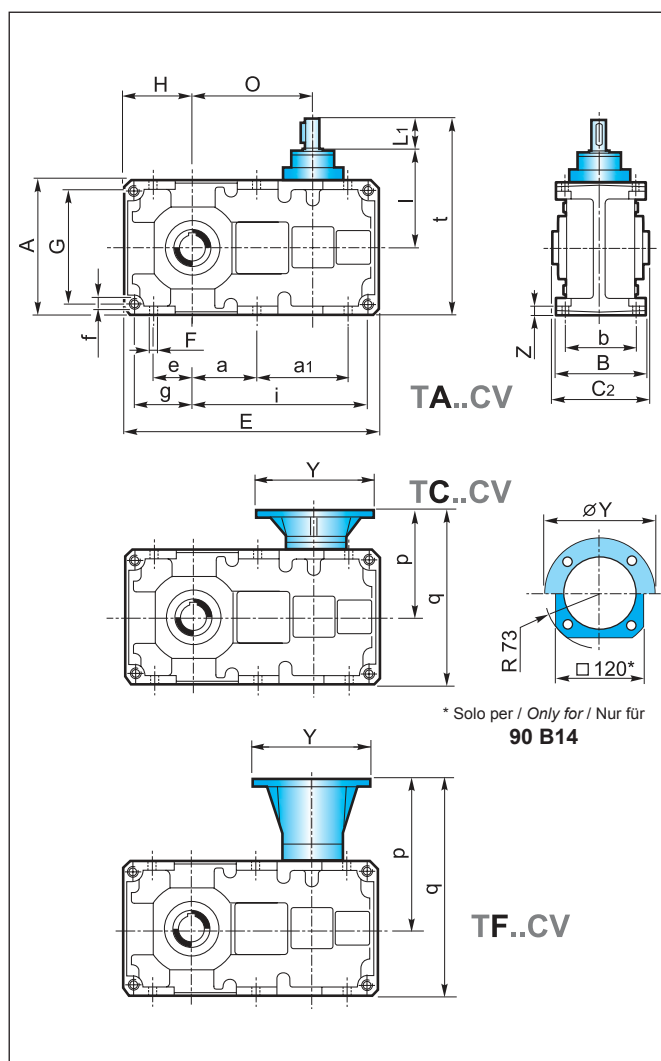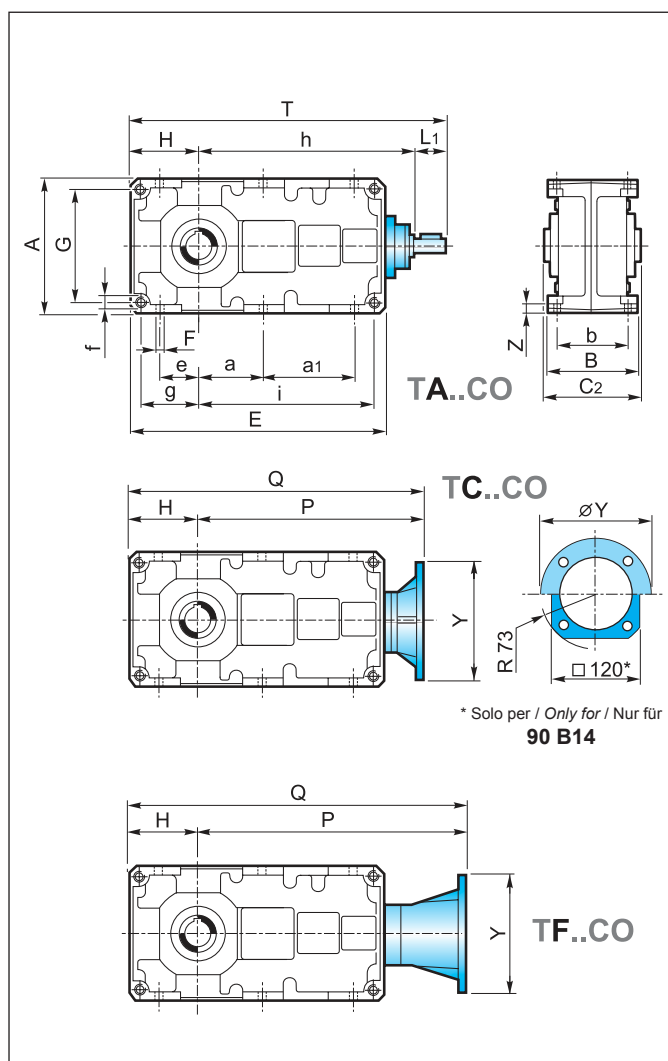


Albero uscita cavo
Hollow output shaft
Abtriebshohlwelle

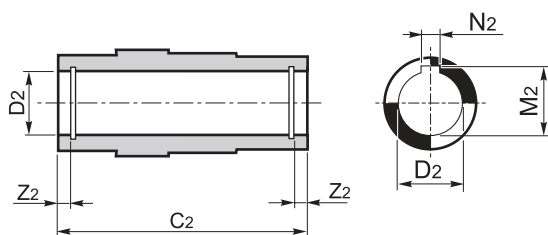

Albero entrata
Input shaft
Antriebswelle



TA... - TC... - TF...														
	80C			100C			125C		160C		180C		200C	
D1 h6	14			19			24		28		28		38	
d1	M4x15			M8x22			M8x22		M8x22		M8x22		M10x28	
M1	16			21.5			27		31		31		41	
N1	5			6			8		8		8		10	
C2	130			155			180		220		260		300	
D2 H7	32	30	35	42	40	45	55	50	70	60	90	80	100	90
M2	35.3	33.3	38.3	45.3	43.3	48.8	59.3	53.8	74.9	64.4	95.4	85.4	106.4	95.4
N2	10	8	10	12	12	14	16	14	20	18	25	22	28	25
Z2	8.7		8.4	10.7			11.9	11.9	15.4	15.9	18.9	19.4	16.9	-



2.11 Accessori


2.11 Accessories

2.11 Zubehör

Albero lento

Output shaft

Abtriebswelle

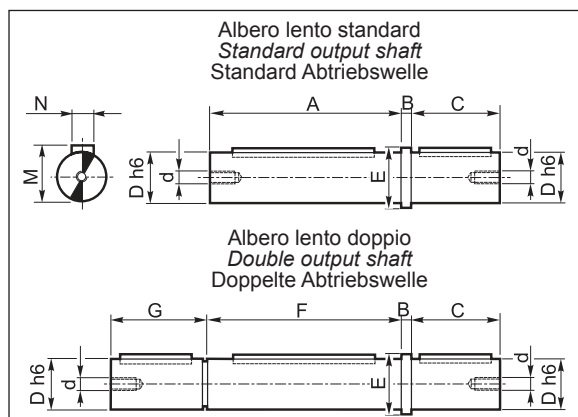

Materiale albero lento: **C45**
Output shaft material: **C45**
Material der Abtriebswelle: **C45**

	T										
	56B 56C	63B 63C	71B	90B 80C		112B 100C		140B 125C	180B 160C	200B 180C	225B 200C
A	100	120	114	129	129	154	154	179	219	259	298
B	5	5	5	6	6	8	8	10	12	15	15
C	40	45	50	60	60	80	80	100	125	140	180
D _{h6}	20	25	24	32	35	42	45	55	70	90	100
d	M8	M8	M8	M8	M8	M10	M10	M10	M12	M16	M18
E	26	32	30	40	43	50	53	65	80	110	118
F	100	120	115	130	—	155	—	180	220	260	300
G	41	46	49	59	—	79	—	99	124	141	178
M	22.5	28	27	35	38	45	48.5	59	74.5	95	106
N	6	8	8	10	10	12	14	16	20	25	28

Kit fissaggio e smontaggio
riduttori con albero lento cavo

Kit for the mounting and dismounting
of the gearboxes with hollow output
shaft

Kit für Montage und Ausbau der
Getriebe mit Abtriebshohlwelle

	T												
	90B 80C			112B 100C			140B 125C		180B 160C		200B 180C		225B 200C
C2	130			155			180		220		260		300
D2	32	30	35	42	40	45	55	50	70	60	90	80	100
H	8	7	6.5	10	8		9		12		16	15.5	17
d1	—			—			M10		M12		M16		M18
d2	—			—			M8		M10		M12		M16
d3	M8			M8			—		—		—		—
d4	M12			M12			—		—		—		—
Z2	8.7		8.4	10.7			11.9		15.4	15.9	18.9	19.4	16.9
Lmax	111	112		131	133		156		189		221		262
Lmin	106	107		126	128		149		182		211		252

