

BRASS / RUBBER BEARINGS FOR MARINE PROPELLER SHAFT**with NORMAL channels*****Patented system for manufacturing***

Big dimensions; avoiding the construction of inner core, permits a very short delivery.

With INVOLUTE channels

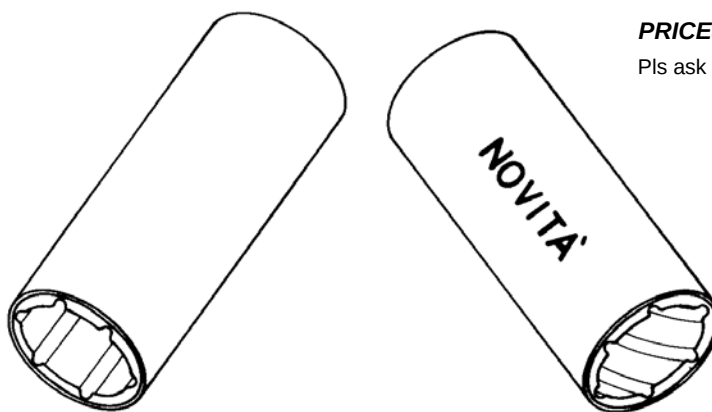
All the dimensions mentioned in the list will be ready in short time.

IMPORTANT:

In case of order pls. specify o' clock or counter-o'clock shaft rotation.

PRICES:

Pls ask for a detailed offer.

***MAX DIMENSIONS:***

to shaft diameter 600 mm.
length 2.000 mm.
Weight 2.500 Kg.

TYPE AS millimeters

Type	I. D.	O. D.	Length
8 AS-20	20	30	80
8 AS-25	25	35	100
8 AS-28	28	38	112
8 AS-30	30	40	120
8 AS-32	32	45	128
8 AS-35	35	48	140
8 AS-40	40	56	160
8 AS-45	45	61	180
8 AS-50	50	66	200
8 AS-55	55	73	220
8 AS-60	60	78	240
8 AS-65	65	83	260
8 AS/AM-70	70	90	280
8 AS-75	75	96	300
8 AS-80	80	102	320
8 AS-85	85	110	340
8 AS-90	90	115	360
8 AS-95	95	123	380
8 AS-100	100	130	400
10 AS-105	105	130	420
10 AS-110	110	135	440
10 AS-115	115	140	460
10 AS-120	120	140	480
10 AS-125	125	150	500

TYPE AM millimeters

Type	I. D.	O. D.	Length
8 AM-20	20	35	80
8 AM-22	22	35	88
8 AM-25	25	40	100
8 AM-28	28	42	112
8 AM-30	30	45	120
8 AM-35	35	50	140
8 AM-38	38	55	152
8 AM-40	40	55	160
8 AM-42	42	60	168
8 AM-44	44	68	180
8 AM-45	45	65	180
8 AM-50	50	70	200
8 AM-55	55	75	220
8 AM-60	60	80	240
8 AM-65	65	85	260
8 AS/AM-70	70	90	280
8 AM-75	75	95	300
8 AM-80	80	100	320
8 AM-85	85	105	340
8 AM-90	90	110	360
8 AM-95	95	115	380
10 AM-100	100	125	400
10 AM-115	115	145	460
10 AM-120	120	155	480

TYPE **AR** millimeters inside - inches outside

Type	Shaft Diameter		Outside Diameter		Length
8 AR-20	=	20,00 mm.	1"1/4	= 31,75 mm.	= 76,20 mm.
8 AR-22	=	22,00 mm.	1"1/4	= 31,75 mm.	= 76,20 mm.
8 AR-25-A	=	25,00 mm.	1"1/4	= 31,75 mm.	= 101,60 mm.
8 AR-25	=	25,00 mm.	1"1/2	= 38,10 mm.	= 101,60 mm.
8 AR-28	=	28,00 mm.	1"5/8	= 41,27 mm.	= 114,30 mm.
8 AR-30	=	30,00 mm.	1"3/4	= 44,45 mm.	= 127,00 mm.
8 AR-32	=	32,00 mm.	1"3/4	= 44,45 mm.	= 127,00 mm.
8 AR-35	=	35,00 mm.	1"7/8	= 47,62 mm.	= 139,70 mm.
8 AR-38	=	38,00 mm.	2"	= 50,80 mm.	= 152,00 mm.
8 AR-40	=	40,00 mm.	2"1/8	= 53,97 mm.	= 160,00 mm.
8 AR-45	=	45,00 mm.	2"3/8	= 60,32 mm.	= 177,80 mm.
8 AR-50	=	50,00 mm.	2"5/8	= 66,67 mm.	= 203,20 mm.
8 AR-55	=	55,00 mm.	3"	= 76,20 mm.	= 228,60 mm.
8 AR-60	=	60,00 mm.	3"1/4	= 82,55 mm.	= 241,30 mm.
8 AR-65	=	65,00 mm.	3"3/8	= 85,72 mm.	= 266,70 mm.
8 AR-70	=	70,00 mm.	3"3/4	= 95,25 mm.	= 279,40 mm.
8 AR-75	=	75,00 mm.	4"	= 101,60 mm.	= 304,80 mm.
8 AR-80	=	80,00 mm.	4"	= 101,60 mm.	= 304,80 mm.
8 AR-85	=	85,00 mm.	4"1/2	= 114,30 mm.	= 342,90 mm.
8 AR-90	=	90,00 mm.	4"1/2	= 114,30 mm.	= 355,60 mm.
8 AR-95	=	95,00 mm.	4"1/2	= 114,30 mm.	= 380,00 mm.
8 AR-100	=	100,00 mm.	5"1/4	= 133,35 mm.	= 400,00 mm.
10 AR-105	=	105,00 mm.	5"1/4	= 133,35 mm.	= 406,40 mm.
10 AR-110	=	110,00 mm.	5"1/2	= 139,70 mm.	= 431,80 mm.
10 AR-115	=	115,00 mm.	5"1/2	= 139,70 mm.	= 457,20 mm.
10 AR-120	=	120,00 mm.	6"1/8	= 155,57 mm.	= 482,60 mm.
10 AR-125	=	125,00 mm.	6"1/8	= 155,57 mm.	= 508,00 mm.

TYPE **AS** inches

Type	Shaft Diameter		Outside Diameter		Length
8 AS-1"	1"	= 25,40 mm.	1"1/2	= 38,10 mm.	4" = 101,60 mm.
8 AS-1"1/8	1"1/8	= 28,57 mm.	1"5/8	= 41,27 mm.	4"1/2 = 114,30 mm.
8 AS-1"1/4	1"1/4	= 31,75 mm.	1"3/4	= 44,45 mm.	5" = 127,00 mm.
8 AS-1"3/8	1"3/8	= 34,92 mm.	1"7/8	= 47,62 mm.	5"1/2 = 139,70 mm.
8 AS-1"1/2	1"1/2	= 38,10 mm.	2"	= 50,80 mm.	6" = 152,40 mm.
8 AS-1"5/8	1"5/8	= 41,27 mm.	2"1/8	= 53,97 mm.	6"1/2 = 165,10 mm.
8 AS-1"3/4	1"3/4	= 44,45 mm.	2"3/8	= 60,32 mm.	7" = 177,80 mm.
8 AS-1"7/8	1"7/8	= 47,62 mm.	2"5/8	= 66,67 mm.	7"1/2 = 190,50 mm.
8 AS-2"	2"	= 50,80 mm.	2"5/8	= 66,67 mm.	8" = 203,20 mm.
8 AS-2"1/8	2"1/8	= 53,97 mm.	3"	= 76,20 mm.	8"1/2 = 215,90 mm.
8 AS-2"1/4	2"1/4	= 57,15 mm.	3"	= 76,20 mm.	9" = 228,60 mm.
8 AS-2"3/8	2"3/8	= 60,32 mm.	3"1/4	= 82,55 mm.	9"1/2 = 241,30 mm.
8 AS-2"1/2	2"1/2	= 63,50 mm.	3"1/4	= 82,55 mm.	10" = 254,00 mm.
8 AS-2"5/8	2"5/8	= 66,67 mm.	3"3/8	= 85,72 mm.	10"1/2 = 266,70 mm.
8 AS-2"3/4	2"3/4	= 69,85 mm.	3"3/4	= 95,25 mm.	11" = 279,40 mm.
8 AS-2"7/8	2"7/8	= 73,02 mm.	3"3/4	= 95,25 mm.	12" = 304,80 mm.
8 AS-3"	3"	= 76,20 mm.	4"	= 101,60 mm.	12" = 304,80 mm.
8 AS-3"1/4	3"1/4	= 82,55 mm.	4"	= 101,60 mm.	12" = 304,80 mm.
8 AS-3"3/8	3"3/8	= 85,72 mm.	4"1/2	= 114,30 mm.	13"1/2 = 342,90 mm.
8 AS-3"1/2	3"1/2	= 88,90 mm.	4"1/2	= 114,30 mm.	14" = 355,60 mm.
8 AS-3"5/8	3"5/8	= 92,07 mm.	4"1/2	= 114,30 mm.	14"1/2 = 368,30 mm.
8 AS-3"3/4	3"3/4	= 95,25 mm.	4"1/2	= 114,30 mm.	15" = 381,00 mm.
8 AS-3"7/8	3"7/8	= 98,42 mm.	5"1/4	= 133,35 mm.	16" = 406,40 mm.
8 AS-4"	4"	= 101,60 mm.	5"1/4	= 133,35 mm.	16" = 406,40 mm.
10 AS-4"1/8	4"1/8	= 104,77 mm.	5"1/4	= 133,35 mm.	16"1/2 = 419,10 mm.
10 AS-4"1/4	4"1/4	= 107,95 mm.	5"1/2	= 139,70 mm.	17" = 431,80 mm.
10 AS-4"3/8	4"3/8	= 111,12 mm.	5"1/2	= 139,70 mm.	17"1/2 = 444,50 mm.
10 AS-4"1/2	4"1/2	= 114,30 mm.	5"1/2	= 139,70 mm.	17"1/2 = 444,50 mm.
10 AS-4"5/8	4"5/8	= 117,47 mm.	6"1/8	= 155,57 mm.	18"1/2 = 469,90 mm.
10 AS-4"3/4	4"3/4	= 120,65 mm.	6"1/8	= 155,57 mm.	19" = 482,60 mm.
10 AS-4"7/8	4"7/8	= 123,82 mm.	6"1/8	= 155,57 mm.	19"1/2 = 495,30 mm.
10 AS-5"	5"	= 127,00 mm.	6"1/8	= 155,57 mm.	20" = 508,00 mm.

TYPE **AM inches**

Type		Shaft Diameter		Outside Diameter		Length
8 AM-7/8"	1)	7/8"	= 22,22 mm.	1"1/4	= 31,75 mm.	3"1/2 = 88,90 mm.
8 AM-7/8"	2)		= 22,22 mm.	1"3/8	= 34,92 mm.	3"1/2 = 88,90 mm.
8 AM-7/8"	3)		= 22,22 mm.	1"1/2	= 38,10 mm.	3"1/2 = 88,90 mm.
8 AM-1"	1)	1"	= 25,40 mm.	1"1/4	= 31,75 mm.	4" = 101,60 mm.
8 AM-1"	2)		= 25,40 mm.	1"3/8	= 34,92 mm.	4" = 101,60 mm.
8 AM-1"	3)		= 25,40 mm.	1"5/8	= 41,27 mm.	4" = 101,60 mm.
8 AM-1"	4)		= 25,40 mm.	2"	= 50,80 mm.	4" = 101,60 mm.
8 AM-1"1/8	1)	1"1/8	= 28,57 mm.	1"1/2	= 38,10 mm.	4"1/2 = 114,30 mm.
8 AM-1"1/8	2)		= 28,57 mm.	1"3/4	= 44,45 mm.	4"1/2 = 114,30 mm.
8 AM-1"1/8	3)		= 28,57 mm.	2"	= 50,80 mm.	4"1/2 = 114,30 mm.
8 AM-1"1/4	1)	1"1/4	= 31,75 mm.	1"1/2	= 38,10 mm.	5" = 127,00 mm.
8 AM-1"1/4	2)		= 31,75 mm.	1"5/8	= 41,27 mm.	5" = 127,00 mm.
8 AM-1"1/4	3)		= 31,75 mm.	2"	= 50,80 mm.	5" = 127,00 mm.
8 AM-1"1/4	4)		= 31,75 mm.	2"1/8	= 53,97 mm.	5" = 127,00 mm.
8 AM-1"3/8	1)	1"3/8	= 34,92 mm.	2"	= 50,80 mm.	5"1/2 = 139,70 mm.
8 AM-1"3/8	2)		= 34,92 mm.	2"1/8	= 53,97 mm.	5"1/2 = 139,70 mm.
8 AM-1"3/8	3)		= 34,92 mm.	2"3/8	= 60,32 mm.	5"1/2 = 139,70 mm.
8 AM-1"1/2	1)	1"1/2	= 38,10 mm.	2"3/8	= 60,32 mm.	6" = 152,40 mm.
8 AM-1"5/8	1)	1"5/8	= 41,27 mm.	2"5/8	= 66,67 mm.	6"1/2 = 165,10 mm.
8 AM-1"3/4	1)	1"3/4	= 44,45 mm.	2"5/8	= 66,67 mm.	7" = 177,80 mm.
8 AM-1"7/8	1)	1"7/8	= 47,62 mm.	2"15/16	= 74,61 mm.	7"1/2 = 190,50 mm.
8 AM-2"	1)	2"	= 50,80 mm.	2"3/4	= 69,85 mm.	8" = 203,20 mm.
8 AM-2"	2)		= 50,80 mm.	3"	= 76,20 mm.	8" = 203,20 mm.
8 AM-2"1/8	1)	2"1/8	= 53,97 mm.	2"3/4	= 69,85 mm.	8"1/2 = 215,90 mm.
8 AM-2"1/8	2)		= 53,97 mm.	2"15/16	= 74,61 mm.	8"1/2 = 215,90 mm.
8 AM-2"1/8	3)		= 53,97 mm.	3"1/8	= 79,37 mm.	8"1/2 = 215,90 mm.
8 AM-2"1/4	1)	2"1/4	= 57,15 mm.	2"15/16	= 74,61 mm.	9" = 228,60 mm.
8 AM-2"1/4	2)		= 57,15 mm.	3"1/8	= 79,37 mm.	9" = 228,60 mm.
8 AM-2"1/4	3)		= 57,15 mm.	3"3/8	= 85,72 mm.	9" = 228,60 mm.
8 AM-2"3/8	1)	2"3/8	= 60,32 mm.	3"	= 76,20 mm.	9"1/2 = 241,30 mm.
8 AM-2"3/8	2)		= 60,32 mm.	3"1/8	= 79,37 mm.	9"1/2 = 241,30 mm.
8 AM-2"3/8	3)		= 60,32 mm.	3"3/8	= 85,72 mm.	9" = 228,60 mm.
8 AM-2"1/2	1)	2"1/2	= 63,50 mm.	3"	= 76,20 mm.	10" = 254,00 mm.
8 AM-2"1/2	2)		= 63,50 mm.	3"1/8	= 79,37 mm.	10" = 254,00 mm.
8 AM-2"1/2	3)		= 63,50 mm.	3"3/8	= 85,72 mm.	10" = 254,00 mm.
8 AM-2"1/2	4)		= 63,50 mm.	3"1/2	= 88,90 mm.	10" = 254,00 mm.
8 AM-2"5/8	1)	2"5/8	= 66,67 mm.	3"1/2	= 88,90 mm.	10"1/2 = 266,70 mm.
8 AM-2"3/4	1)	2"3/4	= 69,85 mm.	3"3/8	= 85,72 mm.	11" = 279,40 mm.
8 AM-2"3/4	2)		= 69,85 mm.	3"1/2	= 88,90 mm.	11" = 279,40 mm.
8 AM-2"7/8	1)	2"7/8	= 73,02 mm.	3"1/2	= 88,90 mm.	11"1/2 = 292,10 mm.
8 AM-3"	1)	3"	= 76,20 mm.	3"3/4	= 95,25 mm.	12" = 304,80 mm.
8 AM-3"	2)		= 76,20 mm.	3"7/8	= 98,42 mm.	12" = 304,80 mm.
8 AM-3"1/8	1)	3"1/8	= 79,37 mm.	4"1/2	= 114,30 mm.	12"1/2 = 317,50 mm.
8 AM-3"1/4	1)	3"1/4	= 82,55 mm.	4"1/4	= 107,95 mm.	13" = 330,20 mm.
8 AM-3"3/8	1)	3"3/8	= 85,72 mm.	4"1/8	= 104,77 mm.	13"1/2 = 342,90 mm.
8 AM-3"1/2	1)	3"1/2	= 88,90 mm.	4"1/4	= 107,95 mm.	14" = 355,60 mm.
8 AM-3"3/4	1)	3"3/4	= 95,25 mm.	5"	= 127,00 mm.	15" = 381,00 mm.
8 AM-3"3/4	2)		= 95,25 mm.	5"1/4	= 133,35 mm.	15" = 381,00 mm.
10 AM-4"	1)	4"	= 101,60 mm.	5"	= 127,00 mm.	16" = 406,40 mm.
10 AM-4"1/4	1)	4"1/4	= 107,95 mm.	5"1/4	= 133,35 mm.	17" = 431,80 mm.
10 AM-4"3/8	1)	4"3/8	= 111,12 mm.	5"3/4	= 146,04 mm.	17"1/2 = 444,50 mm.
10 AM-4"1/2	1)	4"1/2	= 114,30 mm.	5"5/8	= 142,87 mm.	18" = 457,20 mm.
10 AM-4"1/2	2)		= 114,30 mm.	5"3/4	= 146,05 mm.	18" = 457,20 mm.
10 AM-4"3/4	1)	4"3/4	= 120,65 mm.	6"	= 152,40 mm.	19" = 482,60 mm.
10 AM-5"	1)	5"	= 127,00 mm.	6"1/2	= 165,10 mm.	20" = 508,00 mm.