




Type: **DQ 1000-8.7NA**
Direction of airflow A (=AKAD 1000-8.7NA A5)
Part no.: E00-10050



Curve:

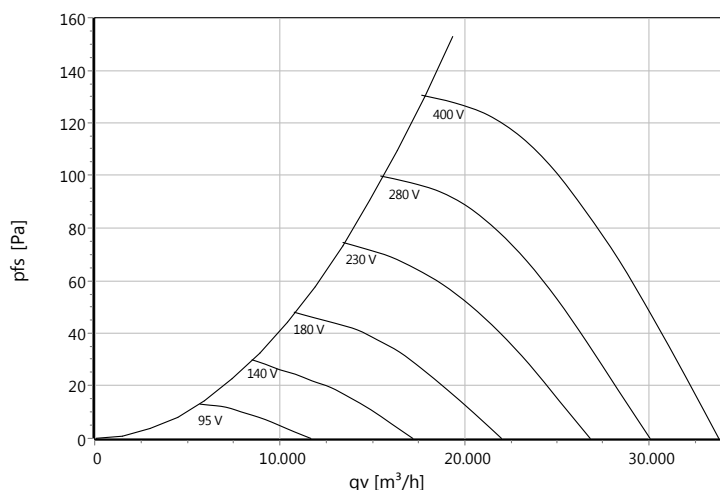

$\rho: 1,15 \text{ kg/m}^3$

Nominal Data:

$\Delta I \ 6 \ \%$

U [V]	f [Hz]	C [μ F]	P _e [kW]	I _N [A]	n _N [r/min]	t _R [°C]	k ₁₀ [m²s/h]	I _A / I _N	IP	m [kg]
400 D	50	-	2,02	4,26	680	-25 .. +55	-	3,4	IP 54	71

Sound Data:


Frequency	Σ	125Hz	250Hz	500Hz	1kHz	2kHz	4kHz	8kHz	Distances	1 m	4 m
LwA(A,in) [dB(A)]	-	-12	-12	-6	-5	-6	-13	-22	LpA(A,in) [dB(A)]	-7	-17

Wiring Diagram:

Drehstrommotor in Δ -Schaltung mit Thermostatschalter (TB).
Drehrichtungsänderung durch Vertauschen von 2 Phasen.

Three phase motor in delta connection with thermostatic switch (TB). Changing of rotation direction by interchanging of 2 phases.


Moteur triphasé branché en triangle avec interrupteur thermostatique (TB). Changement de sens de rotation par inversion de deux phases.

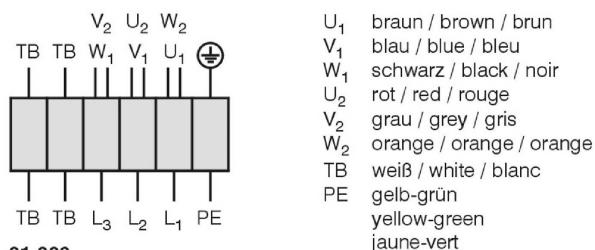

01.006

Not controllable by electronic device

drawing:

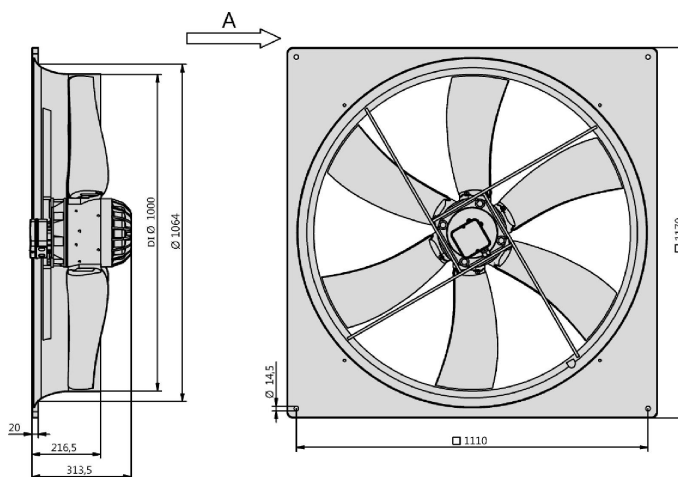



Type: **DQ 1000-8.7NA**
 Direction of airflow A (=AKAD 1000-8.7NA A5)
 Part no.: E00-10050

