


comelmar motors

via Fra Pampuri, 17 - Loc. Mendosio - 20081 Abbiategrasso (MI)
tel. +39.0294964134 / +39.0294964257 / +39.0294965980 - fax +39.029462618
Internet: www.comelmar.it - E-mail: info@comelmar.it - Pec : comelmarmotors@legalmail.it

////////// ////////// //////////	MOTEUR A ROTOR BOBINE NEUF 2EC™ – European Electric Company / NIEUW SLEEPRING MOTOR 2€C – European Electric Company/ NEW SLIPRING MOTOR 2€C –European Electric Company /
Type	355 ML
Puissance / Vermogen / Power	315 kW
Rotor Data :	VR : 734 AR : 264
Stator current :	529A@400V – 920A@230V
Vitesse / Snelheid/ Speed	1490 rpm
Forme de construction / Bouwvorm / Construction Form	B3
IP	IP55
Rendement/ Efficiency	94.5%
Cos Phi	0.91
Poids / Gewicht/ Weight	2350 kg
Autres / Anderen/ Others	Fonte / Gietijzer/ Cast Iron Class (e) : F Echauffement / Opwarming / Heating : F T-Box : orientable - au dessus / orienteerbaar - bovenop / swiveling- top Graisseurs / smeernippels / grease nipples PTC – CPT + Roulement NU coté axe / NU Bearing Drive End

comelmar motors

via Fra Pampuri, 17 - Loc. Mendosio - 20081 Abbiategrasso (MI)
tel. +39.0294964134 / +39.0294964257 / +39.0294965980 - fax +39.029462618
Internet: www.comelmar.it - E-mail: info@comelmar.it - Pec : comelmarmotors@legalmail.it

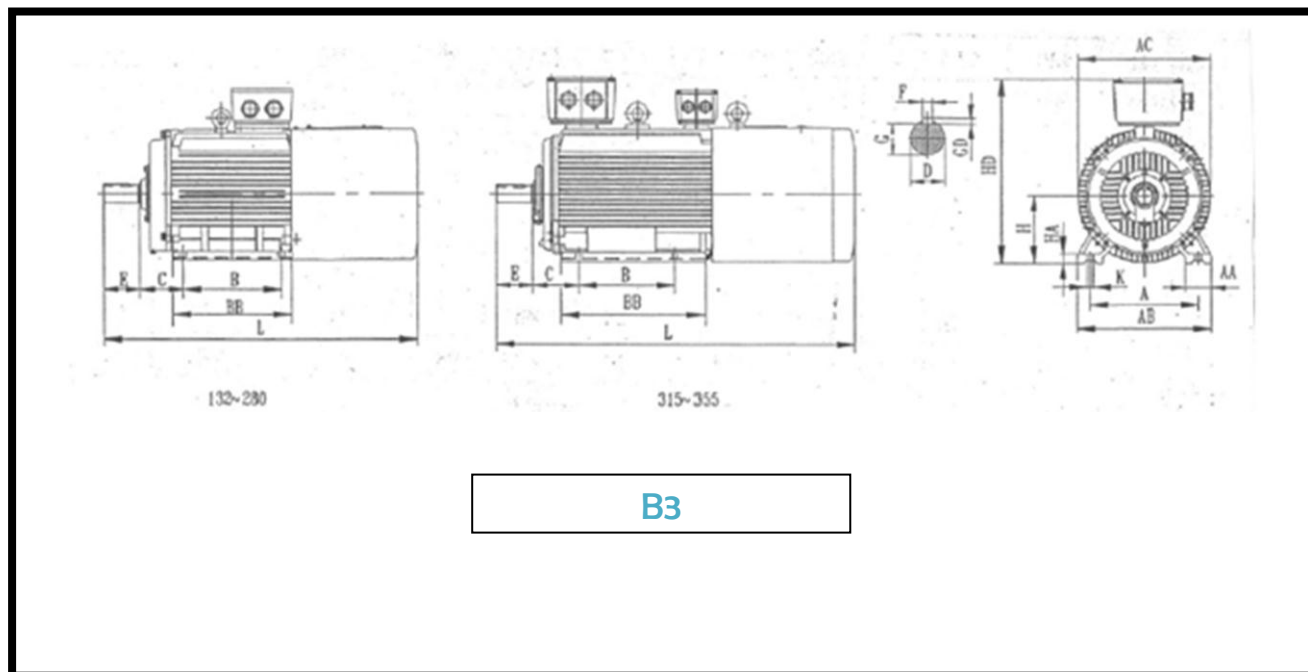

Frame	A	B	C	D	E	FxGD	G	H	K	AB	AC	AA	BB	HD	HA	L
132M	216	178	89	38	80	10*8	33	132	12	270	275	55	230	345	18	745
160M	254	210	108	42	110	12*8	37	160	15	320	320	65	275	420	20	820
160L	254	254	108	42	110	12*8	37	160	15	320	320	65	320	420	20	865
180L	279	279	121	48	110	14*9	42.5	180	15	355	380	70	355	455	22	920
200L	318	305	133	55	110	16*10	49	200	19	388	400	70	375	525	25	970
225M	356	311	149	60	140	18*11	53	225	19	435	446	75	400	555	28	1061
250M	406	349	168	65	140	18*11	58	250	24	490	495	80	450	615	30	1150
280S	457	368	190	75	140	20*12	67.5	280	24	550	560	85	490	700	35	1260
280M	457	419	190	75	140	20*12	67.5	280	24	550	560	85	540	700	35	1710
315S	508	406	216	80	170	22*14	71	315	28	635	635	125	680	870	45	1700
315M	508	457	216	80	170	22*14	71	315	28	635	635	125	680	870	45	1700
315L	508	508	216	80	170	22*14	71	315	28	635	635	125	680	870	45	1700
355M	610	560	254	100	210	28*16	90	355	28	730	710	125	750	1010	52	1910
355L	610	630	254	100	210	28*16	90	355	28	730	710	125	750	1010	52	1910