


Forced cooling kits - Outline dimensions

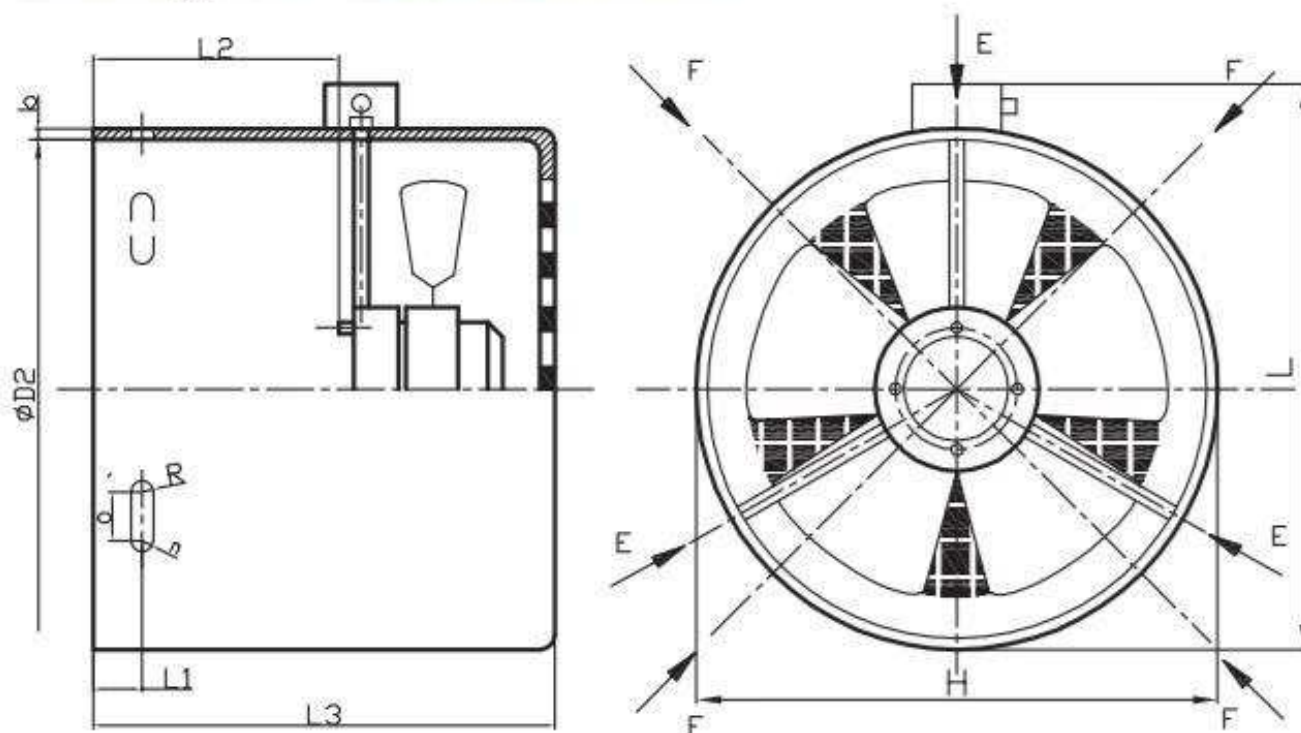

TYPE	ΦD	L1	L2	L3	b	a	R	n	L	H
G-63A	121+1	13	50	125	1,2	2	2,5	3	175	126
G-71A	136+1	13	60	153	1,2	2	2,5	3	185	140
G-80A	155+1	16,5	85	175	1,2	2	2,5	3	201	156
G-90A	175+1	17	96	188	1,2	2	2,5	3	220	175
G-100A	193+1	19	96	196	1,5	4	3	3	242	197
G-112A	217+1	18,5	100	200	1,5	4	3	3	266	221
G-132A	258+1	18,5	110	217	1,5	4	3	3	303	258
G-160A	314+1	20	149	266	2	4	3,5	4	360	315
G-180A	352+1	35	190	312	2	5	3,5	4	401	356
G-200A	393+1	40	190	314	2	5	3,5	4	442	397
G-225A	443+1	40	220	374	2	6	4,5	4	492	447
G-250A	482+1	55	240	399	2	6	4,5	4	531	486
G-280A	546+1	65	265	429	2	9	5,5	4	635	550
G-315A	614+1	75	310	505	2	9	5,5	4	703	618
G-355A	694+1	82	380	585	2	7	6,5	4	783	698