


All dimensions in millimetres

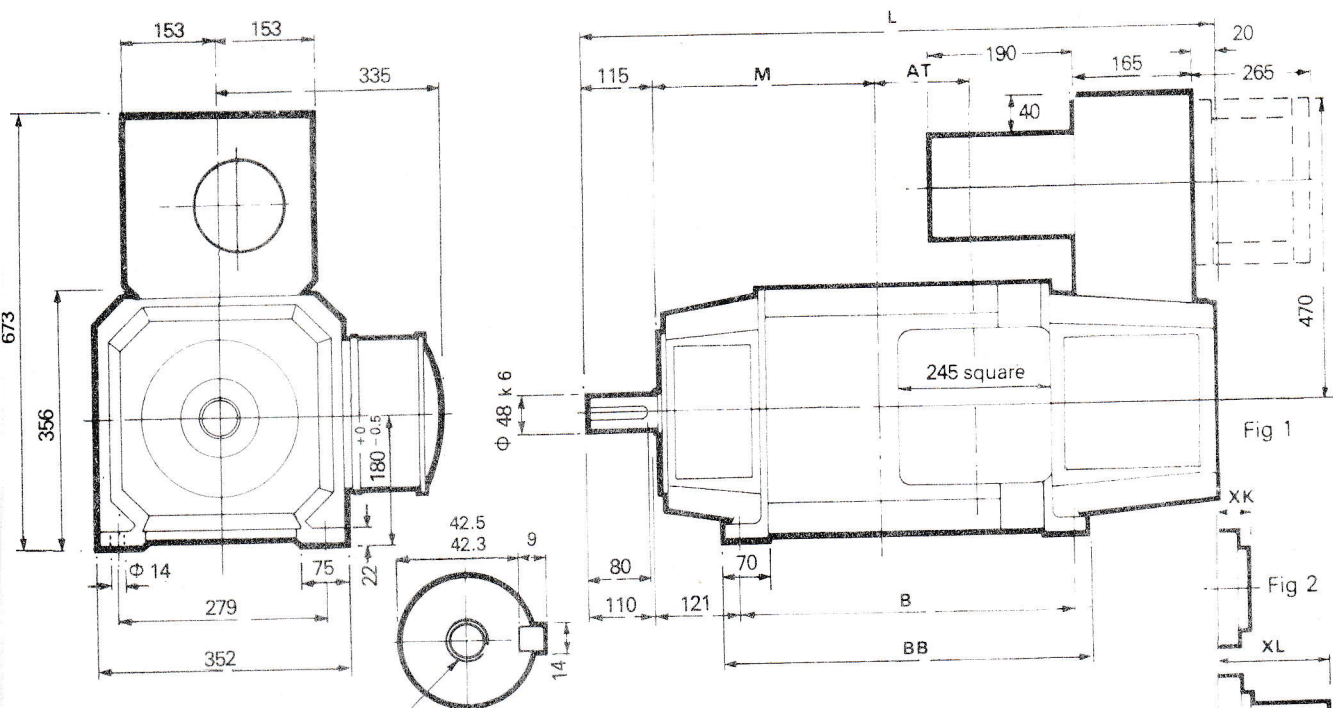

Hole in shaft end
tapped M12 x 1.75 x 20 deep

Note: Terminal box & F.V. unit can be mounted on top or on either side, but not generally on the same side. If this feature is required specify special F.V. adaptor & add 62mm to overall height.


Note: Terminal box provided with all four sides solid. Centre portion of box is easily removed to allow conduit entry holes to be drilled.

Note: Optional 5 sided entry filter box supplied with disposable or washable elements.

Motor Supplied Fitted with

1	Filter	
2	Air Proving Switch	
3	No Tacho' (Fig 1)	
4	Tacho' Provision (Fig 2)	
5	Tacho' Fitted (Fig 3)	

Tacho	XK	XL	Wgt (Kg)
REO 444N	38	164	1.8
REO 444R1	38	174	2.8
REO AC14	6	64	1.75
BD 2510	38	294	12.7

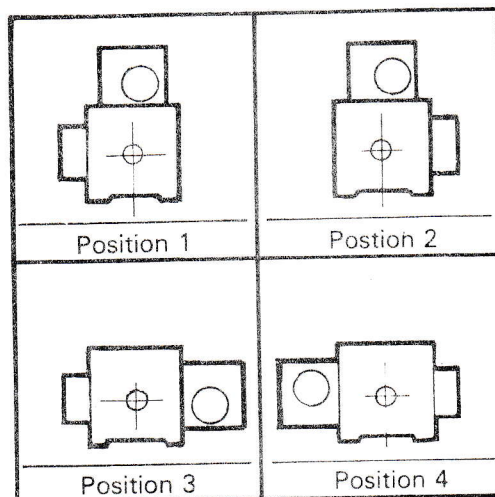

Frame	B	L	M	AT	BB	Wgt (kg)
180S	493	905	319	131	537	331
180M	543	955	344	156	587	375
180L	593	1005	369	181	637	415

Customer _____ BULL Serial No. _____ Customer O/No. _____
 Frame _____ Kw/Hp _____ R.P.M. _____
 Arm.V. _____ Field.V. _____ Winding _____

D.C. Industrial Motor Frame 180
 Force Ventilated with Filter (Optional). Ball Bearing

BULL MOTORS LIMITED IPSWICH ENGLAND



DM 3004