


# Level Measurement

## Continuous level measurement – Radar transmitters

### SITRANS LR250

#### Overview

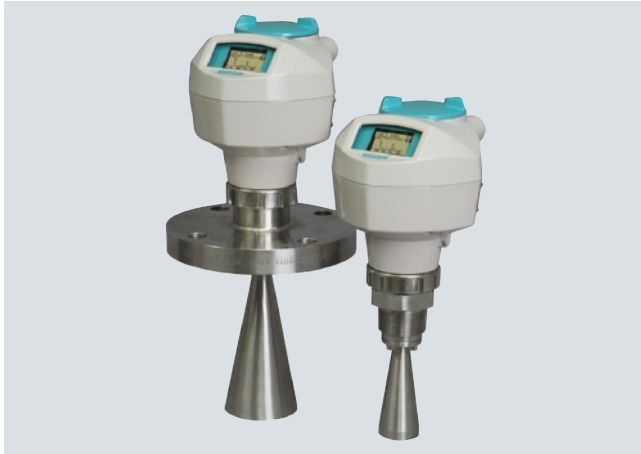

SITRANS LR250 is a 2-wire, 25 GHz pulse radar level transmitter for continuous monitoring of liquids and slurries in storage and process vessels including high temperature and pressure, to a range of 20 m (66 ft).

#### Benefits

- Graphical local user interface (LUI) makes operation simple with plug-and-play setup using the intuitive Quick Start Wizard
- LUI displays echo profiles for diagnostic support
- 25 GHz high frequency allows for small antennas for easy mounting in nozzles
- Insensitive to mounting location and obstructions, and less sensitive to nozzle interference
- Short blanking distance for improved minimum measuring range to 50 mm (2 inch) from the end of the antenna
- Communication using HART or PROFIBUS PA, or FOUNDATION Fieldbus
- Process Intelligence signal processing for improved measurement reliability and Auto False-Echo Suppression of fixed obstructions
- Programming using infrared Intrinsically Safe handheld programmer or over a network using SIMATIC PDM, Emerson AMS, or Field Device Tools, such as PACTware or Fieldcare via SITRANS DTM
- Suitable for use in Ssafety related systems in accordance with IEC 61508/61511 (SIL-2)

#### Application

SITRANS LR250 includes a graphical local user interface (LUI) that improves setup and operation by including an intuitive Quick Start Wizard, and echo profile displays for diagnostic support. Startup is easy using the Quick Start wizard with a few parameters required for basic operation.

The 25 GHz frequency creates a narrow, focused beam allowing for smaller antenna options and decreasing sensitivity to obstructions.

SITRANS LR250's unique design allows safe and simple programming using the Intrinsically Safe handheld programmer without saving to open the instrument's lid.

SITRANS LR250 measures superbly on low dielectric media, and in small vessels, as well as tall and narrow vessels.


- Key Applications: liquid bulk storage tanks, process vessels with agitators, vaporous liquids, high temperatures, low dielectric media

#### Configuration

##### Installation


##### Note:

- Beam angle is the width of the cone where the energy density is half of the peak energy density.
- The peak energy density is directly in front of and in line with the horn antenna.
- There is a signal transmitted outside of the beam angle; therefore false targets may be detected.




##### Mounting unit on bypass

Orient front or back of device toward vent.

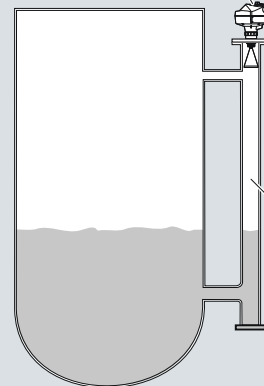


##### Mounting unit on stilling well


Orient front or back of device toward stillpipe slots.



##### Mounting unit on vessel



##### Mounting on a nozzle



SITRANS LR250 installation, dimensions in mm (inch)

# Level Measurement

## Continuous level measurement – Radar transmitters

SITRANS LR250

### Technical specifications

<b>Mode of operation</b>		<b>Antenna</b>	
Measuring principle	Radar level measurement	• Material	316L stainless steel [optional alloy N06022/2.4602 (Hastelloy C-22 or equivalent)]
Frequency	K-band (25.0 GHz)	• Dimensions (nominal horn sizes)	Standard 1.5" (40 mm), 2" (48 mm), 3" (75 mm), 4" (95 mm) horn and optional 100 mm (4 inch) horn extension
Minimum measuring range	50 mm (2 inch) from end of antenna	Process connections	
Maximum measuring range	20 m (65 ft), antenna dependent	• Process connection	1½" or 2" NPT [(Taper), ANSI/ASME B1.20.1] R 1½" or 2" [(BSPT), EN 10226] G 1½" or 2" [(BSPP), EN ISO 228-1]
<b>Output</b>		• Flange connection	2", 3", 4" (ANSI 150, 300 lb), 50, 80, 100 mm (PN 16, 40, JIS 10K)
HART	Version 5.1	<b>Power supply</b>	
• Analog output	4 ... 20 mA	4 ... 20 mA/HART	Nominal 24 V DC (max. 30 V DC) with max. 550 Ω
• Accuracy	± 0.02 mA	PROFIBUS PA	• 15 mA • per IEC 61158-2
• Fail-safe	• Programmable as high low or hold (loss of echo) • NE 43 programmable	FOUNDATION Fieldbus	• 20.0 mA • per IEC 61158-2
PROFIBUS PA:	Profile 3.1	<b>Certificates and approvals</b>	
• Function blocks	2 Analog Input (AI)	General	CSA <sub>US/CA</sub> , CE, FM, NE 21, C-TICK, KC
FOUNDATION Fieldbus	H1	Radio	FCC, Industry Canada and Europe ETSI EN 302-372, C-TICK
• Functionality	Basic or LAS	Hazardous	
• Version	ITK 5.2.0	• Intrinsically Safe (Europe)	ATEX II 1G EEx ia IIC T4 ATEX II 1D EEx tD A20 IP67 T90°C
• Function blocks	2 Analog Input (AI)	• Intrinsically Safe (China)	NEPSI Ex ia IIC T4/DIP A20 TA T90°C IP67
<b>Performance (according to reference conditions IEC60770-1)</b>		• Non-sparking/ Energy Limited (Europe)	ATEX II 3G EEx nA/nL IIC T4 Gc
Maximum measured error	5 mm (0.2 inch)	• Non-sparking/ Energy Limited (China)	NEPSI Ex nA/nL IIC T4
Influence of ambient temperature	< 0.003 %/K	• Intrinsically Safe (Canada/USA)	CSA/FM Class I, Div. 1, Groups A, B, C, D; Class II, Div. 1, Groups E, F, G; Class III T4
<b>Rated operating conditions</b>		• Non-incendive (Canada/USA)	CSA/FM Class I, Div. 2, Groups A, B, C, D T5
Installation conditions	Indoor/outdoor	• Intrinsically Safe (International)	IECEx Ex ia IIC T4, Ex tD A20 IP67 T90°C
• Location		• Intrinsically Safe (Brazil)	INMETRO Br-Ex ia IIC T4
Ambient conditions (enclosure)		• Flame Proof (International/Europe)	IECEx/ATEX II 1/2 GD, 1D, 2D, Ex dmbia IIC T4 Ga/Gb, Ex tD A20 IP67 T90°C
• Ambient temperature	-40 ... +80 °C (-40 ... +176 °F)	• Explosion Proof (Brazil)	INMETRO Br-Ex dmbia IIC T4
• Installation category	I	• Increased Safety (International/Europe)	IECEx/ATEX II 1/2 GD, 1D, 2D, Ex embia IIC T4 Ga/Gb, Ex tD A20 IP67 T90°C
• Pollution degree	4	• Increased Safety (Brazil)	INMETRO Br-Ex embia IIC T4
<b>Medium conditions</b>		• Explosion Proof (Canada/USA)	CSA/FM Class I, Div. 1, Groups A, B, C, D; Class II, Div. 1, Groups E, F, G; Class III T4
Dielectric constant $\epsilon_r$	> 1.6, antenna and application dependent	• Increased Safety/ Flameproof (China)	Ex dmbia IIC T4/ Ex embia IIC T4/ DIP A20 TA, T90°C IP67
Process temperature	-40 ... +200 °C (-40 ... +392 °F) (at process connection with FKM o-ring) -20 ... +200 °C (-4 ... +392 °F) (at process connection with FFKM o-ring)		
Process pressure	Up ... 40 bar g (580 psi g), process connection and temperature dependent. See Pressure/Temperature curves for more information		
<b>Design</b>			
Enclosure			
• Material	Aluminium, polyester powder-coated		
• Cable inlet	2 x M20x1.5 or 2 x ½" NPT		
Degree of protection	Type 4X/NEMA 4X, Type 6/ NEMA 6, IP67, IP68		
Weight	< 3 kg (6.6 lb) 3.75 mm (1½") threaded connection with 1½" horn antenna		
Display (local)	Graphic local user interface including quick start wizard and echo profile display		

# Level Measurement

## Continuous level measurement – Radar transmitters

### SITRANS LR250

Marine	<ul style="list-style-type: none"> <li>• Lloyd's Register of Shipping</li> <li>• ABS Type Approval</li> <li>• Bureau Veritas</li> </ul>
Functional Safety	SIL-2 suitable in accordance with IEC 61508/61511
<b>Programming</b> <ul style="list-style-type: none"> <li>• Intrinsically Safe Siemens handheld programmer</li> <li>• Approvals for handheld programmer</li> </ul>	Infrared receiver  IS model: ATEX II 1 GD Ex ia IIC T4 Ga Ex ia D 20 T135 °C Ta = -20 ... +50 °C CSA/FM Class I, II, III, Div. 1., Groups A, B, C, D, E, F, G, T6 Ta = 50 °C IECEx SIR 09.0073
Handheld communicator	HART communicator 375/475
PC	<ul style="list-style-type: none"> <li>• SIMATIC PDM</li> <li>• Emerson AMS</li> <li>• SITRANS DTM (for connection into FDT, such as PACTware or Fieldcare)</li> </ul>
Display (local)	Graphic local user interface including quick start wizard and echo profile displays

# Level Measurement

## Continuous level measurement – Radar transmitters

SITRANS LR250

Selection and Ordering data	Order No.
<b>SITRANS LR250</b>	C) <b>7ML5431-</b>
2-wire, 25 GHz pulse radar level transmitter for continuous monitoring of liquids and slurries in storage and process vessels including high temperature and pressure, to a range of 20 m (66 ft). Ideal for small vessels and low dielectric media.	
<b>Process Connection and Antenna Material</b>	
316L (1.4435 or 1.4404) stainless steel, PTFE emitter, FFKM seal <sup>1)</sup>	<b>0</b>
316L (1.4435 or 1.4404) stainless steel, PTFE emitter, FFKM seal <sup>1)</sup>	<b>1</b>
Hastelloy C-22/2.4602 (or equivalent), PTFE emitter, FFKM seal <sup>2)</sup>	<b>2</b>
Hastelloy C-22/2.4602 (or equivalent), PTFE emitter, FFKM seal <sup>2)</sup>	<b>3</b>
<b>Process Connection Type</b>	
<u>Threaded connection 316L</u>	
1½" NPT (ASME B1.20.1) (tapered thread) <sup>3)</sup>	<b>AA</b>
R 1½" [(BSPT), EN 10226-1] (tapered thread) <sup>3)</sup>	<b>AB</b>
G 1½" [(BSPP), EN ISO 228-1] (parallel thread) <sup>3)</sup>	<b>AC</b>
2" NPT (ASME B1.20.1) (tapered thread)	<b>AD</b>
R 2" [(BSPT), EN 10226-1] (tapered thread)	<b>AE</b>
G 2" [(BSPP), EN ISO 228-1] (parallel thread)	<b>AF</b>
<u>Flanged connection 316L</u>	
2" Class 150 ASME B16.5 flat faced <sup>4)</sup>	<b>BA</b>
3" Class 150 ASME B16.5 flat faced <sup>4)</sup>	<b>BB</b>
4" Class 150 ASME B16.5 flat faced <sup>4)</sup>	<b>BC</b>
2" Class 300 ASME B16.5 flat faced <sup>4)</sup>	<b>CA</b>
3" Class 300 ASME B16.5 flat faced <sup>4)</sup>	<b>CB</b>
4" Class 300 ASME B16.5 flat faced <sup>4)</sup>	<b>CC</b>
DN 50 PN 16 EN 1092-1 Type A flat faced <sup>4)</sup>	<b>DA</b>
DN 80 PN 16 EN 1092-1 Type A flat faced <sup>4)</sup>	<b>DB</b>
DN 100 PN 16 EN 1092-1 Type A flat faced <sup>4)</sup>	<b>DC</b>
DN 50 PN 40 EN 1092-1 Type A flat faced <sup>4)</sup>	<b>EA</b>
DN 80 PN 40 EN 1092-1 Type A flat faced <sup>4)</sup>	<b>EB</b>
DN 100 PN 40 EN 1092-1 Type A flat faced <sup>4)</sup>	<b>EC</b>
50A 10K JIS B 2220 flat faced <sup>4)</sup>	<b>FA</b>
80A 10K JIS B 2220 flat faced <sup>4)</sup>	<b>FB</b>
100A 10K JIS B 2220 flat faced <sup>4)</sup>	<b>FC</b>
DN 50 PN 16 DIN EN1092-1 Type B1 raised face	<b>GA</b>
DN 80 PN 16 DIN EN1092-1 Type B1 raised face	<b>GB</b>
DN 100 PN 16 DIN EN1092-1 Type B1 raised face	<b>GC</b>
DN 150 PN 16 DIN EN1092-1 Type B1 raised face	<b>GD</b>
DN 50 PN 40 DIN EN1092-1 Type B1 raised face	<b>HA</b>
DN 80 PN 40 DIN EN1092-1 Type B1 raised face	<b>HB</b>
DN 100 PN 40 DIN EN1092-1 Type B1 raised face	<b>HC</b>
DN 150 PN 40 DIN EN1092-1 Type B1 raised face	<b>HD</b>

Selection and Ordering data	Order No.
<b>SITRANS LR250</b>	C) <b>7ML5431-</b>
2-wire, 25 GHz pulse radar level transmitter for continuous monitoring of liquids and slurries in storage and process vessels including high temperature and pressure, to a range of 20 m (66 ft). Ideal for small vessels and low dielectric media.	
<u>Flanged connection Hastelloy C</u>	
2" Class 150 ASME B16.5 raised faced <sup>4)</sup>	<b>JA</b>
3" Class 150 ASME B16.5 raised faced <sup>4)</sup>	<b>JB</b>
4" Class 150 ASME B16.5 raised faced <sup>4)</sup>	<b>JC</b>
2" Class 300 ASME B16.5 raised faced <sup>4)</sup>	<b>JD</b>
3" Class 300 ASME B16.5 raised faced <sup>4)</sup>	<b>JE</b>
4" Class 300 ASME B16.5 raised faced <sup>4)</sup>	<b>JF</b>
DN 50 PN 16 EN 1092-1 Type A raised faced <sup>4)</sup>	<b>KA</b>
DN 80 PN 16 EN 1092-1 Type A raised faced <sup>4)</sup>	<b>KB</b>
DN 100 PN 16 EN 1092-1 Type A raised faced <sup>4)</sup>	<b>KC</b>
DN 50 PN 40 EN 1092-1 Type A raised faced <sup>4)</sup>	<b>KD</b>
DN 80 PN 40 EN 1092-1 Type A raised faced <sup>4)</sup>	<b>KE</b>
DN 100 PN 40 EN 1092-1 Type A raised faced <sup>4)</sup>	<b>KF</b>
50A 10K JIS B 2220 raised faced <sup>4)</sup>	<b>LA</b>
80A 10K JIS B 2220 raised faced <sup>4)</sup>	<b>LB</b>
100A 10K JIS B 2220 raised faced <sup>4)</sup>	<b>LC</b>
DN 50 PN 16 DIN EN1092-1 Type B1 raised face	<b>MA</b>
DN 80 PN 16 DIN EN1092-1 Type B1 raised face	<b>MB</b>
DN 100 PN 16 DIN EN1092-1 Type B1 raised face	<b>MC</b>
DN 150 PN 16 DIN EN1092-1 Type B1 raised face	<b>MD</b>
DN 50 PN 40 DIN EN1092-1 Type B1 raised face	<b>ME</b>
DN 80 PN 40 DIN EN1092-1 Type B1 raised face	<b>MF</b>
DN 100 PN 40 DIN EN1092-1 Type B1 raised face	<b>MG</b>
DN 150 PN 40 DIN EN1092-1 Type B1 raised face	<b>MH</b>
<b>Communication/Output</b>	
PROFIBUS PA	<b>1</b>
4 ... 20 mA, HART, startup at < 3.6 mA	<b>2</b>
FOUNDATION Fieldbus	<b>3</b>
<b>Enclosure/Cable inlet</b>	
Aluminum, Epoxy painted	
2 x ½" NPT	<b>0</b>
2 x M20x1.5	<b>1</b>
<b>Antenna</b>	
(Note: Please use largest horn size possible)	
1½" horn	<b>A</b>
2" horn (fits 2" ASME or DN 50 nozzles)	<b>B</b>
3" horn (fits 3" ASME or DN 80 nozzles)	<b>C</b>
4" horn (fits 4" ASME or DN 100 nozzles)	<b>D</b>
1½" horn with 100 mm extension <sup>5)</sup>	<b>E</b>
2" horn with 100 mm extension	<b>F</b>
3" horn with 100 mm extension	<b>G</b>
4" horn with 100 mm extension	<b>H</b>
<u>Hastelloy C22 (or equivalent)</u>	
2" horn (fits 2" ASME or DN 50 nozzles)	<b>J</b>
3" horn (fits 3" ASME or DN 80 nozzles)	<b>K</b>
4" horn (fits 4" ASME or DN 100 nozzles)	<b>L</b>
2" horn (fits 2" ASME or DN 50 nozzles) with 100 mm extension	<b>M</b>
3" horn (fits 3" ASME or DN 80 nozzles) with 100 mm extension	<b>N</b>
4" horn (fits 4" ASME or DN 100 nozzles) with 100 mm extension	<b>P</b>

5

# Level Measurement

## Continuous level measurement – Radar transmitters

### SITRANS LR250

#### Selection and Ordering data

Order No.

#### SITRANS LR250

C) 7ML5431-

2-wire, 25 GHz pulse radar level transmitter for continuous monitoring of liquids and slurries in storage and process vessels including high temperature and pressure, to a range of 20 m (66 ft). Ideal for small vessels and low dielectric media.

#### Approvals

General Purpose, CE, CSA, FM, FCC, R&TTE, C-TICK, KC

Intrinsically Safe, CSA/FM Class I, II, III, Div. 1, Groups A, B, C, D, E, F, G, Industry Canada FCC

Intrinsically Safe, IECEx/ATEX II 1 GD Ex ia IIC T4, Ex tD A20 IP67 T90°C, INMETRO Br-Ex ia IIC T4, CE, R&TTE, C-TICK, KC

Non-incendive, CSA/FM Class I, Div. 2, Groups A, B, C, D, FCC

Non-sparking, Energy Limited, ATEX II 3G Ex nA/nL IIC T4, CE, R&TTE, C-TICK, KC

Increased Safety, IECEx/ATEX II 1/2 GD Ex embia IIC T4, Ex tD A20 IP67 T90°C, INMETRO Br-Ex ia IIC T4, CE, R&TTE, C-TICK, KC<sup>5)</sup>

Flame Proof, IECEx/ATEX II 1/2 GD Ex dmbia IIC T4, Ex tD A20 IP67 T90°C, INMETRO Br-Ex ia IIC T4, CE, R&TTE, C-TICK, KC<sup>5)</sup>

Explosion Proof CSA/FM Class I, II, III, Div. 1, Gr. A, B, C, D, E, F, G, Industry Canada FCC<sup>5)</sup>

#### Pressure rating

Rating per Pressure/Temperature curves in manual  
0.5 bar g (7.25 psi g) maximum

0

1

A

B

C

D

E

F

G

H

0

1

- 1) Available with process connection options AA to HD & Antenna Versions A to H only
- 2) Available with process connection options JA to MH & Antenna Versions J to P only
- 3) Available For antenna versions A and E only, max. range 10 m (32.8 ft), dk > 3
- 4) Siemens Milltronics type flange (flange bolting patterns and facings dimensionally correspond to the applicable ASME B16.5, or EN 1092-1, or JIS B 2220 standard), see operating instructions for details
- 5) Applicable with communication option 2 only

C) Subject to export regulations AL: N, ECCN: EAR99.

# Level Measurement

## Continuous level measurement – Radar transmitters

### SITRANS LR250


Selection and Ordering data	Order code	Selection and Ordering data	Order code
<b>Further designs</b>		<b>Accessories</b>	
Please add <b>"-Z"</b> to Order No. and specify Order code(s).		Handheld programmer, Intrinsically safe, EEx ia	C) <b>7ML1930-1BK</b>
Plug M12 with mating Connector <sup>1)2)3)</sup>	<b>A50</b>	HART modem/RS-232 (for use with a PC and SIMATIC PDM)	D) <b>7MF4997-1DA</b>
Plug 7/8" with mating Connector <sup>2)3)4)</sup>	<b>A55</b>	HART modem/USB (for use with a PC and SIMATIC PDM)	D) <b>7MF4997-1DB</b>
Stainless steel tag [69 x 50 mm (2.71 x 1.97 inch)]: Measuring-point number/identification (max. 27 characters); specify in plain text	<b>Y15</b>	One metallic cable gland M20x1.5, rated -40 ... +80 °C (-40 ... +176 °F), HART (two are required)	<b>7ML1930-1AP</b>
Test certificate: Manufacturer's test certificate M to DIN 55350, Part 18 and to ISO 9000	<b>C11</b>	One metallic cable gland M20x1.5, rated -40 ... +80 °C (-40 ... +176 °F), PROFIBUS PA and FOUNDATION Fieldbus (two are required) <sup>6)</sup>	<b>7ML1930-1AQ</b>
Acceptance test certificate 3.1 of EN 10204	<b>C12</b>	FDA approved FKM o-ring for 2" G (BSPP) process connections -28 ... 80 °C (-28 ... 176 °F)	<b>7ML1830-3AN</b>
Functional Safety - SIL-2 suitable in accordance with IEC 61508/61511 <sup>3)5)</sup>	<b>C20</b>	SITRANS RD100 Remote display - see Chapter 8	
Namur NE43 compliant, device preset to failsafe < 3.6 mA <sup>5)</sup>	<b>N07</b>	SITRANS RD200 Remote display - see Chapter 8	
<b>Operating Instructions for HART/mA device</b>		SITRANS RD500 web, datalogging, alarming, ethernet, and modem support for instrumentation - see Chapter 8	K) <b>7ML5750- 1AA00-0</b>
English	C) <b>7ML1998-5JE03</b>	1) Available with enclosure option 1 only	
German	C) <b>7ML1998-5JE33</b>	2) To be used with communication options 1 and 3 only. Connector has IP67 rating.	
Note: The Operating Instructions should be orde- red as a separate line item on the order.		3) Available with approvals options A, B, C, D, and E only	
Multi-language Quick Start manual	C) <b>7ML1998-5QX82</b>	4) Available with enclosure option 0 only	
This device is shipped with the Siemens Milltronics manual CD containing the complete ATEX Quick Start and Operating Instructions library.		5) Applicable to communication option 2 only	
<b>Operating Instructions for PROFIBUS PA device</b>		6) For use with communication option 1 and 3 only	
English	C) <b>7ML1998-5JF03</b>	C) Subject to export regulations AL: N, ECCN: EAR99.	
German	C) <b>7ML1998-5JF33</b>	D) Subject to export regulations AL: N, ECCN: EAR99H.	
Note: The Operating Instructions should be orde- red as a separate line item on the order.		K) Subject to export regulations AL: N, ECCN: 5A991X.	
Multi-language Quick Start manual	C) <b>7ML1998-5XE82</b>		
This device is shipped with the Siemens Milltronics manual CD containing the complete ATEX Quick Start and Operating Instructions library.			
<b>Operating Instructions for FOUNDATION Fieldbus device</b>			
English	C) <b>7ML1998-5KL01</b>		
German	C) <b>7ML1998-5KL31</b>		
Note: The Operating Instructions should be ordered as a separate line item on the order.			
Multi-language Quick Start manual	C) <b>7ML1998-5XN81</b>		
This device is shipped with the Siemens Milltronics manual CD containing the complete ATEX Quick Start and Operating Instructions library.			

# Level Measurement

## Continuous level measurement – Radar transmitters

### SITRANS LR250

#### Characteristic curves

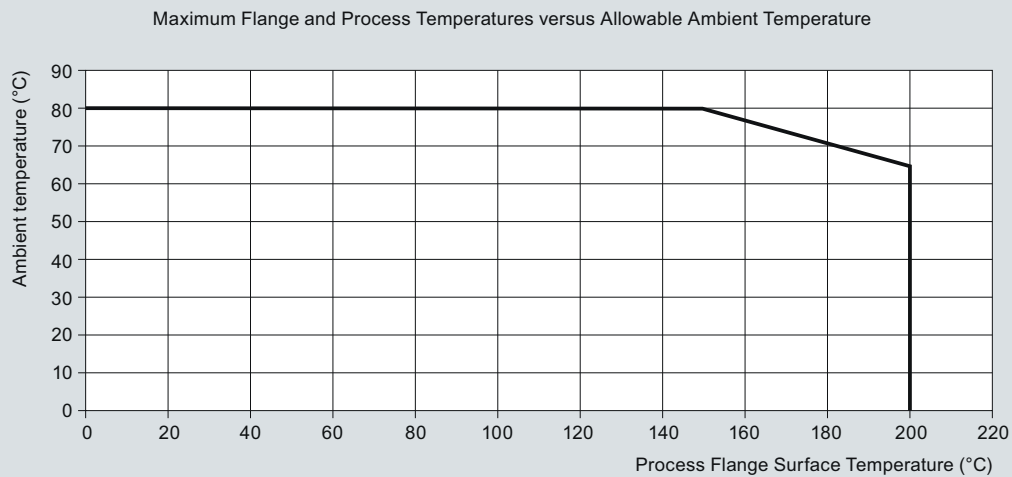

SITRANS LR250 Ambient/Process Flange Surface Temperature Curve


# Level Measurement

## Continuous level measurement – Radar transmitters


SITRANS LR250

### Dimensional drawings



SITRANS LR250

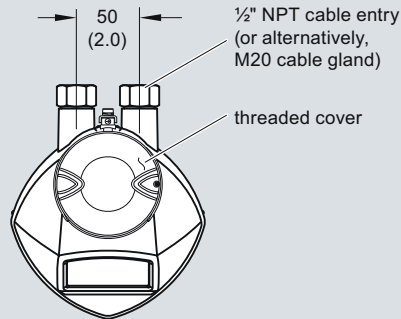

Flanged

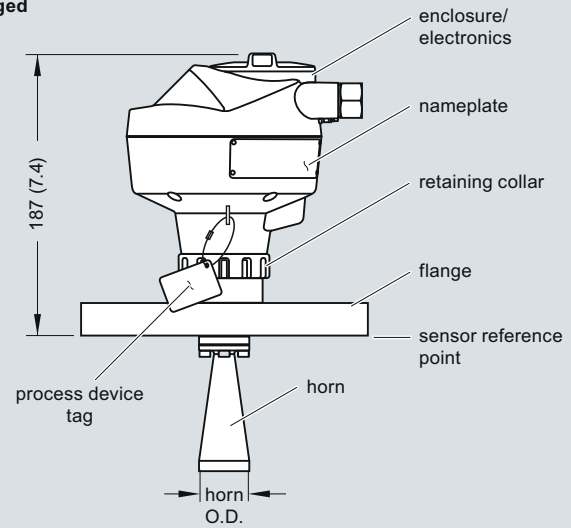

Threaded

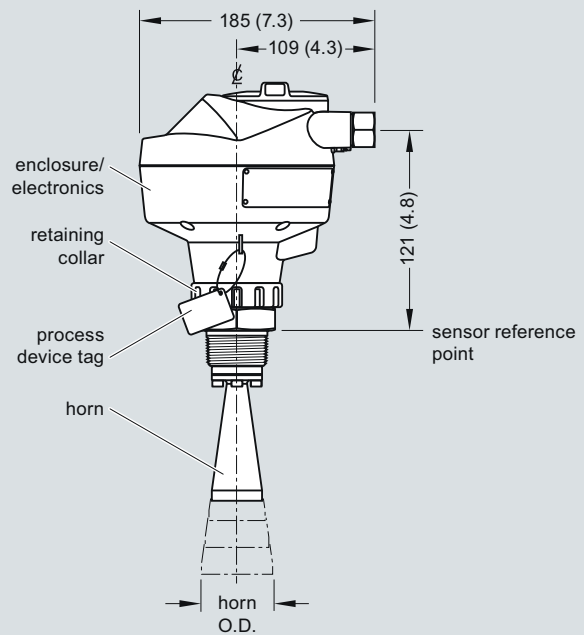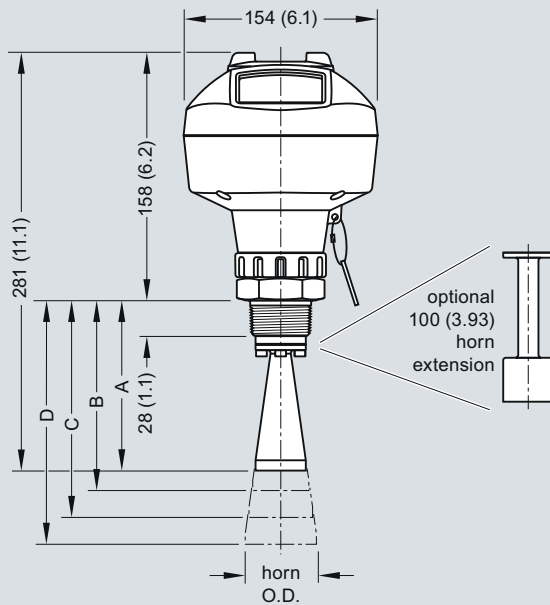

Nominal Horn Size	Horn O.D.	Horn Height		Beam Angle	Measurement Range
40 (1.5)	39.8 (1.57)	A	135 (5.3)	19 degrees	10 m (32.8 ft)
50 (2)	47.8 (1.88)	B	166 (6.55)	15 degrees	20 m (65.6 ft)
80 (3)	74.8 (2.94)	C	199 (7.85)	10 degrees	20 m (65.6 ft)
100 (4)	94.8 (3.73)	D	254 (10)	8 degrees	20 m (65.6 ft)

SITRANS LR250, dimensions in mm (inch)




# Level Measurement

## Continuous level measurement – Radar transmitters

### SITRANS LR250

#### Schematics

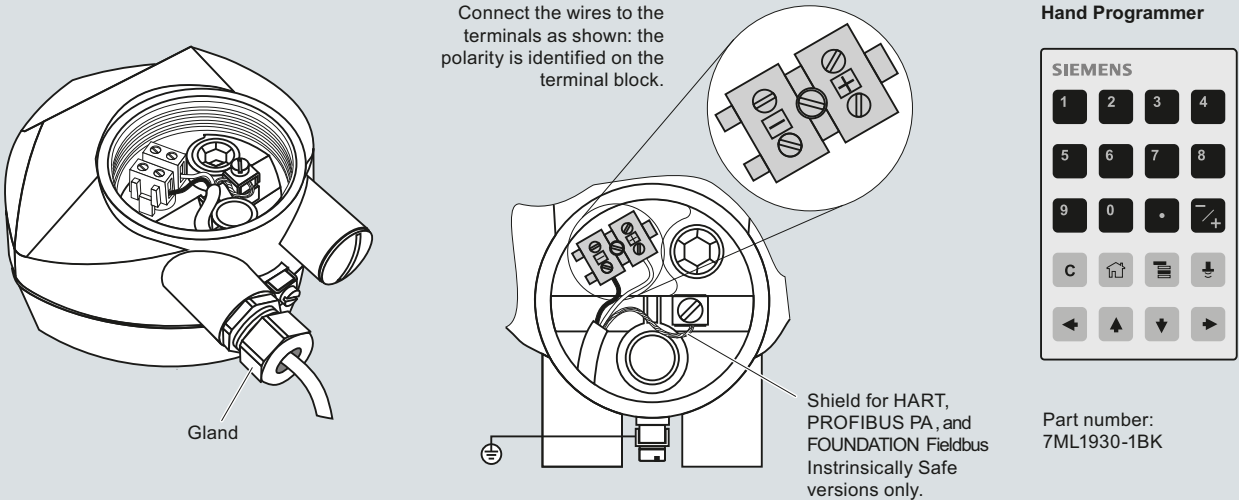

Connect the wires to the terminals as shown: the polarity is identified on the terminal block.

Shield for HART, PROFIBUS PA, and FOUNDATION Fieldbus Intrinsically Safe versions only.

**Hand Programmer**

**SIEMENS**

1	2	3	4
5	6	7	8
9	0	.	/+
C	⏏	≡	⏴
←	↑	↓	→

Part number:  
7ML1930-1BK

**Notes:**

1. DC terminal shall be supplied from a source providing electrical isolation between the input and output, to meet the applicable safety requirements of IEC 61010-1.
2. All field wiring must have insulation suitable for rated input voltages.
3. Use shielded twisted pair cable (14 to 22 AWG) for HART version.
4. Separate cables and conduit may be required to conform to standard instrumentation wiring practices or electrical codes.

SITRANS LR250 connections

# Level Measurement

## Continuous level measurement – Radar transmitters

### SITRANS LR250 Specials

#### SITRANS LR250 Specials

Order No.

#### SITRANS LR250 horn version enclosures (PROFIBUS PA models)



LR250 horn version enclosure with board stack, C) **A5E01156836**  
NPT cable inlet, approval option A, with PROFIBUS  
PA communication, no process connection

LR250 horn version enclosure with board stack, C) **A5E01156838**  
M20 cable inlet, approval option A, with PROFIBUS  
PA communication, no process connection

LR250 horn version enclosure with board stack, C) **A5E01156839**  
NPT cable inlet, approval option B, with PROFIBUS  
PA communication, no process connection

LR250 horn version enclosure with board stack, C) **A5E01156841**  
M20 cable inlet, approval option B, with PROFIBUS  
PA communication, no process connection

LR250 horn version enclosure with board stack, C) **A5E01156843**  
NPT cable inlet, approval option C, with PROFIBUS  
PA communication, no process connection

LR250 horn version enclosure with board stack, C) **A5E01156844**  
M20 cable inlet, approval option C, with PROFIBUS  
PA communication, no process connection

LR250 horn version enclosure with board stack, C) **A5E01156846**  
M20 cable inlet, approval option C, with PROFIBUS  
PA communication, no process connection

LR250 horn version enclosure with board stack, C) **A5E01156848**  
M20 cable inlet, approval option D, with PROFIBUS  
PA communication, no process connection

#### SITRANS LR250 horn version enclosures (FOUNDATION Fieldbus models)



LR250 horn version enclosure with board stack, C) **A5E02654608**  
M20 cable inlet, approval option C,  
with FOUNDATION Fieldbus communication,  
no process connection

LR250 horn version enclosure with board stack, C) **A5E02653792**  
NPT cable inlet, approval option A,  
with FOUNDATION Fieldbus communication,  
no process connection

LR250 horn version enclosure with board stack, C) **A5E02653793**  
M20 cable inlet, approval option A,  
with FOUNDATION Fieldbus communication,  
no process connection

LR250 horn version enclosure with board stack, C) **A5E02654606**  
NPT cable inlet, approval option C,  
with FOUNDATION Fieldbus communication,  
no process connection

#### SITRANS LR250 horn version enclosures (< 3.6 mA start-up HART)



SITRANS LR250 horn version enclosure with board C) **A5E02956317**  
stack, M20 cable inlet, approval option A,  
with HART communication start-up at < 3.6 mA,  
no process connection

SITRANS LR250 horn version enclosure with board C) **A5E02956319**  
stack, M20 cable inlet, approval option C,  
with HART communication start-up at < 3.6 mA,  
no process connection

#### SITRANS LR250 Specials

Order No.

SITRANS LR250 horn version enclosure with board C) **A5E02956320**  
stack, M20 cable inlet, approval option E,  
with HART communication start-up at < 3.6 mA,  
no process connection

SITRANS LR250 horn version enclosure with board C) **A5E02956322**  
stack, M20 cable inlet, approval option F,  
with HART communication start-up at < 3.6 mA,  
no process connection

SITRANS LR250 horn version enclosure with board C) **A5E02956323**  
stack, M20 cable inlet, approval option G,  
with HART communication start-up at < 3.6 mA,  
no process connection

LR250 horn version enclosure with board stack, C) **A5E03441096**  
NPT cable inlet, approval option A, with HART  
communication start-up at < 3.6 mA, no process  
connection

LR250 horn version enclosure with board stack, C) **A5E03441097**  
NPT cable inlet, approval option B, with HART  
communication start-up at < 3.6 mA, no process  
connection

LR250 horn version enclosure with board stack, C) **A5E03441098**  
NPT cable inlet, approval option D, with HART  
communication start-up at < 3.6 mA, no process  
connection

LR250 horn version enclosure with board stack, C) **A5E03441099**  
NPT cable inlet, approval option H, with HART  
communication start-up at < 3.6 mA, no process  
connection

#### SITRANS LR250 horn antenna and extension kits



38 mm (1.5 inch) horn antenna kit, C) **A5E01151539**  
1.5 inch Process Connections only

100 mm (4 inch) horn antenna extension kit, **A5E01151553**  
1.5 inch Process Connections only

50 mm (2 inch) stainless steel 316L horn antenna C) **A5E01151569**  
kit

75 mm (3 inch) stainless steel 316L horn antenna C) **A5E01151571**  
kit

100 mm (4 inch) stainless steel 316L horn antenna C) **A5E01151573**  
kit

100 mm (4 inch) horn antenna extension kit, C) **A5E01151577**  
50 mm (2 inch), 75 mm (3 inch) and 100 mm  
(4 inch) process connection

50 mm (2 inch) horn antenna kit, Hastelloy C-22 J) **A5E01151584**

75 mm (3 inch) horn antenna kit, Hastelloy C-22 J) **A5E01151585**

100 mm (4 inch) horn antenna kit, Hastelloy C-22 J) **A5E01151587**

5 Dupont 1Gr Polyback, PTFE grease kit C) **A5E01151626**

LR250 lid with O-ring **A5E02465410**

C) Subject to export regulations AL: N, ECCN: EAR99.

J) Subject to export regulations AL: 91999, ECCN: EAR99.

Please contact [ceg.smpi@siemens.com](mailto:ceg.smpi@siemens.com) for special requests.

# Level Measurement

## Continuous level measurement – Radar transmitters

### SITRANS LR250 threaded PVDF antenna

#### Overview



SITRANS LR250 with threaded PVDF antenna is a 2-wire, 25 GHz pulse radar level transmitter for continuous monitoring of liquids and slurries in storage and process vessels including corrosives or aggressive materials, to a range of 10 m (32.8 ft).

#### Benefits

- Fully insulated PVDF antenna design for use in chemical and sanitary environments where aggressive and corrosive materials are used
- Cost effective replacement for transmitters made of exotic materials
- Graphical local user interface (LUI) makes operation simple with plug-and-play setup using the intuitive Quick Start Wizard
- LUI displays echo profiles for diagnostic support
- 25 GHz high frequency and 2" (50 mm) process connection/antenna allow for easy mounting in nozzles
- Insensitive to mounting location and obstructions, and less sensitive to nozzle interference
- Short blanking distance for improved minimum measuring range to 50 mm (2 inch) from the end of the horn
- Communication using HART or PROFIBUS PA, or FOUNDATION Fieldbus
- Process Intelligence signal processing for improved measurement reliability and Auto False-Echo Suppression of fixed obstructions
- Programming using infrared Intrinsically Safe handheld programmer or over a network using SIMATIC PDM, Emerson AMS, or Field Device Tools, such as PACTware or Fieldcare via SITRANS DTM.
- Suitable for use in Safety Related Systems in accordance with IEC 61508/61511 (SIL-2)

#### Application

SITRANS LR250 includes a graphical local user interface (LUI) that improves setup and operation by including an intuitive Quick Start Wizard, and echo profile displays for diagnostic support. Startup is easy using the Quick Start wizard with a few parameters required for basic operation.

The 25 GHz frequency creates a narrow, focused beam allowing for smaller antenna options and decreasing sensitivity to obstructions.

SITRANS LR250's unique design allows safe and simple programming using the Intrinsically Safe handheld programmer without having to open the instrument's lid.

SITRANS LR250 measures superbly in small vessels and in tanks/vessels up to 10 m (32 ft) on materials with  $dk > 3$ .

- Key Applications: liquid bulk storage tanks, process vessels with agitators, vaporous liquids, temperatures to 80 °C (176 °F), corrosive and aggressive materials, media with dielectric ( $dk$ )  $\geq 3$  (application dependent)

# Level Measurement

## Continuous level measurement – Radar transmitters


SITRANS LR250 threaded PVDF antenna

### Configuration

#### Installation


##### Note:

- Beam angle is the width of the cone where the energy density is half of the peak energy density.
- The peak energy density is directly in front of and in line with the antenna.
- There is a signal transmitted outside of the beam angle; therefore false targets may be detected.

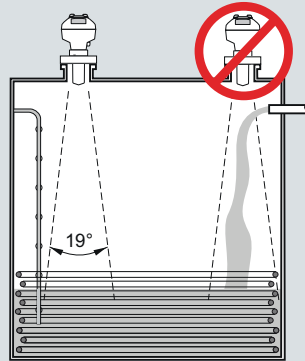


#### Mounting unit on bypass

Orient front or back of device toward vent.

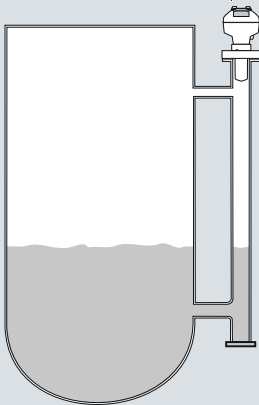


#### Mounting unit on stilling well


Orient front or back of device toward stillpipe slots.



#### Mounting unit on vessel



#### Mounting on a nozzle



SITRANS LR250 PVDF antenna installation, dimensions in mm (inch)

# Level Measurement

## Continuous level measurement – Radar transmitters

### SITRANS LR250 threaded PVDF antenna

#### Technical specifications

<b>Mode of operation</b>		<b>Power supply</b>	
Measuring principle	Radar level measurement	4 ... 20 mA/HART	Nominal 24 V DC (max. 30 V DC) with max. 550 Ω
Frequency	K-band (25.0 GHz)	PROFIBUS PA	<ul style="list-style-type: none"> <li>• 15 mA</li> <li>• per IEC 61158-2</li> </ul>
Minimum measuring range	50 mm (2 inch) from end of horn	FOUNDATION Fieldbus	<ul style="list-style-type: none"> <li>• 20.0 mA</li> <li>• per IEC 61158-2</li> </ul>
Maximum measuring range	10 m (32.8 ft)		
<b>Output</b>		<b>Certificates and approvals</b>	
HART	Version 5.1	General	CSA <sub>US/C</sub> , CE, FM, NE 21, C-TICK, KC
• Analog output	4 ... 20 mA	Radio	FCC, Industry Canada and Europe ETSI EN 302-372, C-TICK
• Accuracy	± 0.02 mA	Hazardous	
• Fail-safe	<ul style="list-style-type: none"> <li>• Programmable as high low or hold (loss of echo)</li> <li>• NE 43 programmable</li> </ul>	<ul style="list-style-type: none"> <li>• Intrinsically Safe (Europe)</li> </ul>	ATEX II 1G EEx ia IIC T4 ATEX II 1D EEx tD A20 IP67 T90°C
PROFIBUS PA	Profile 3.1	<ul style="list-style-type: none"> <li>• Intrinsically Safe (China)</li> </ul>	NEPSI Ex ia IIC T4/DIP A20 TA T90°C IP67
• Function blocks	2 Analog Input (AI)	<ul style="list-style-type: none"> <li>• Non-sparking/Energy Limited (Europe)</li> <li>• Non-sparking/Energy Limited (China)</li> <li>• Intrinsically Safe (Canada/USA)</li> </ul>	ATEX II 3G EEx nA/nL IIC T4 Gc
FOUNDATION Fieldbus	H1		NEPSI Ex nA/nL IIC T4
• Functionality	Basic or LAS		CSA/FM Class I, Div. 1, Groups A, B, C, D; Class II, Div. 1, Groups E, F, G; Class III T4
• Version	ITK 5.2.0		CSA/FM Class I, Div. 2, Groups A, B, C, D T5
• Function blocks	2 Analog Input (AI)		IECEx Ex ia IIC T4, Ex tD A20 IP67 T90°C
<b>Performance (according to reference conditions IEC60770-1)</b>			INMETRO Br-Ex ia IIC T4 IECEx/ATEX II 1/2 GD, 1D, 2D, Ex dmbia IIC T4 Ga/Gb, Ex tD A20 IP67 T90°C
Maximum measured error	<ul style="list-style-type: none"> <li>• &gt; 500 mm from sensor reference point: 5 mm (0.2 inch)</li> <li>• &lt; 500 mm from sensor reference point: 25 mm (1 inch)</li> </ul>	<ul style="list-style-type: none"> <li>• Non-incendive (Canada/USA)</li> <li>• Intrinsically Safe (International)</li> </ul>	IECEx/ATEX II 1/2 GD, 1D, 2D, Ex embia IIC T4 Ga/Gb, Ex tD A20 IP67 T90°C
Influence of ambient temperature	< 0.003 %/K	<ul style="list-style-type: none"> <li>• Increased Safety (International/Europe)</li> <li>• Increased Safety (Brazil)</li> <li>• Explosion Proof (Canada/USA)</li> </ul>	IECEx/ATEX II 1/2 GD, 1D, 2D, Ex embia IIC T4 Ga/Gb, Ex tD A20 IP67 T90°C
<b>Rated operating conditions</b>			INMETRO Br-Ex embia IIC T4 CSA/FM Class I, Div. 1, Groups A, B, C, D; Class II, Div. 1, Groups E, F, G; Class III T4
Installation conditions		<ul style="list-style-type: none"> <li>• Increased Safety/Flameproof (China)</li> </ul>	Ex dmbia IIC T4/ Ex embia IIC T4/DIP A20 TA, T90°C IP67
Location	Indoor/outdoor	Marine	<ul style="list-style-type: none"> <li>• Lloyd's Register of Shipping</li> <li>• ABS Type Approval</li> <li>• Bureau Veritas</li> </ul>
Ambient conditions (enclosure)		Functional safety	SIL-2 suitable in accordance with IEC 61508/61511
Ambient temperature	-40 ... +80 °C (-40 ... +176 °F)		
Installation category	I		
Pollution degree	4		
<b>Medium conditions</b>			
Dielectric constant $\epsilon_r$	≥ 3 (1.6 in stillpipe)		
Process temperature	-40 ... +80 °C (-40 ... +176 °F) at process connection		
Process pressure	Up to 5 bar g (72 psi g) temperature dependent. See Pressure/Temperature curves for more information		
<b>Design</b>			
Enclosure			
• Material	Aluminium, polyester powder-coated		
• Cable inlet	2 x M20x1.5 or 2 x ½" NPT		
Degree of protection	Type 4X/NEMA 4X, Type 6/NEMA 6, IP67, IP68		
Weight	approximately 3.3 kg (7.27 lb)		
Display (local)	Graphic local user interface including quick start wizard and echo profile display		
Antenna			
• Material	PVDF (Polyvinylidene fluoride)		
• Dimensions (nominal horn sizes)	2" (48 mm)		
Process connections			
Process connection	2" NPT [(Taper), ASME B1.20.1] 2" [(BSPT), EN 10226] 2" [(BSPP), EN ISO 228-1]		
		<b>Programming</b>	
		Intrinsically Safe Siemens handheld programmer	Infrared receiver
		• Approvals for handheld programmer	IS model: ATEX II 1 GD Ex ia IIC T4 Ga Ex ia D 20 T = 135 °C Ta = -20 ... +50 °C CSA/FM Class I, II, III, Div. 1., Groups A, B, C, D, E, F, G, T6 Ta = 50 °C IECEx SIR 09.0073
		Handheld communicator	HART communicator 375/475
		PC	<ul style="list-style-type: none"> <li>• SIMATIC PDM</li> <li>• Emerson AMS</li> <li>• SITRANS DTM (for connection into FDT, such as PACTware or Fieldcare)</li> </ul>
		Display (local)	Graphic local user interface including quick start wizard and echo profile displays

# Level Measurement

## Continuous level measurement – Radar transmitters

### SITRANS LR250 threaded PVDF antenna

Selection and Ordering data	Order No.	Selection and Ordering data	Order code
<b>SITRANS LR250 threaded PVDF antenna</b> 2-wire, 25 GHz pulse radar level transmitter for continuous monitoring of liquids and slurries in storage and process vessels including corrosives or aggressive materials, to a range of 10 m (32.8 ft).	C) <b>7ML5431-</b>	<b>Further designs</b> Please add "-Z" to Order No. and specify Order code(s).	
<b>Process Connection and Antenna Material</b> Threaded PVDF antenna	4	Plug M12 with mating Connector <sup>1)2)3)</sup>	<b>A50</b>
<b>Process Connection Type</b> Threaded connections PVDF 2" NPT (ASME B1.20.1) (tapered thread) R 2" [(BSPT), EN 10226-1] (tapered thread) G 2" [(BSPP), EN ISO 228-1] (parallel thread)	PA PB PC	Plug 7/8" with mating Connector <sup>2)3)4)</sup>	<b>A55</b>
<b>Communication/Output</b> PROFIBUS PA 4 ... 20 mA, HART, startup at < 3.6 mA FOUNDATION Fieldbus	1 2 3	Stainless steel tag [69 x 50 mm (2.71 x 1.97 inch)]: Measuring-point number/identification (max. 27 characters); specify in plain text	<b>Y15</b>
<b>Enclosure/Cable inlet</b> Aluminum, Epoxy painted 2 x 1/2" NPT 2 x M20x1.5	0 1	Test certificate: Manufacturer's test certificate M to DIN 55350, Part 18 and to ISO 9000	<b>C11</b>
<b>Antenna</b> 2" (50 mm) threaded PVDF antenna	R	Inspection Certificate Type 3.1 per EN 10204	<b>C12</b>
<b>Approvals</b> General Purpose, CE, CSA, FM, FCC, R&TTE, C-TICK, KC Intrinsically Safe, CSA/FM Class I, II, III, Div. 1, Groups A, B, C, D, E, F, G, Industry Canada FCC Intrinsically Safe, IECEx/ATEX II 1 GD Ex ia IIC T4, Ex tD A20 IP67 T90°C, INMETRO Br-Ex ia IIC T4, CE, R&TTE, C-TICK, KC Non-incendive, CSA/FM Class I, Div. 2, Groups A, B, C, D, FCC Non-sparking, Energy Limited, ATEX II 3G Ex nA/nL IIC T4, CE, R&TTE, C-TICK, KC Increased Safety, IECEx/ATEX II 1/2 GD Ex embia IIC T4, Ex tD A20 IP67 T90°C, INMETRO Br-Ex ia IIC T4, CE, R&TTE, C-TICK, KC <sup>1)</sup> Flame Proof, IECEx/ATEX II 1/2 GD Ex dmbia IIC T4, Ex tD A20 IP67 T90°C, INMETRO Br-Ex ia IIC T4, CE, R&TTE, C-TICK, KC <sup>1)</sup> Explosion Proof CSA/FM Class I, II, III, Div. 1, Gr. A, B, C, D, E, F, G, Industry Canada FCC <sup>1)</sup>	A B C D E F G H	Functional Safety - SIL2 suitable in accordance with IEC 61508/61511 <sup>5) 6)</sup>	<b>C20</b>
<b>Pressure rating</b> Rating per Pressure/Temperature curves in manual	0	Namur NE43 compliant, device preset to failsafe < 3.6 mA <sup>5)</sup>	<b>N07</b>
		<b>Operating Instructions for HART/ma device</b>	Order No.
		English	C) <b>7ML1998-5JE03</b>
		German	C) <b>7ML1998-5JE33</b>
		Note: The Operating Instructions should be ordered as a separate line item on the order.	
		Multi-language Quick Start manual This device is shipped with the Siemens Milltronics manual CD containing the complete ATEX Quick Start and Operating Instructions library.	C) <b>7ML1998-5QX82</b>
		<b>Operating Instructions for PROFIBUS PA device</b>	
		English	C) <b>7ML1998-5JF03</b>
		German	C) <b>7ML1998-5JF33</b>
		Note: The Operating Instructions should be ordered as a separate line item on the order.	
		Multi-language Quick Start manual This device is shipped with the Siemens Milltronics manual CD containing the complete ATEX Quick Start and Operating Instructions library.	C) <b>7ML1998-5XE82</b>
		<b>Operating Instructions for FOUNDATION Fieldbus device</b>	
		English	C) <b>7ML1998-5KL01</b>
		German	C) <b>7ML1998-5KL31</b>
		Note: The Operating Instructions should be ordered as a separate line item on the order.	
		Multi-language Quick Start manual This device is shipped with the Siemens Milltronics manual CD containing the complete ATEX Quick Start and Operating Instructions library.	C) <b>7ML1998-5XN81</b>

<sup>1)</sup> Applicable to Communication option 2 only

C) Subject to export regulations AL: N, ECCN: EAR99.

# Level Measurement

## Continuous level measurement – Radar transmitters

### SITRANS LR250 threaded PVDF antenna

#### Selection and Ordering data

#### Order code


##### Accessories

Handheld programmer, Intrinsically safe, EEx ia	C) <b>7ML1930-1BK</b>
HART modem/RS-232 (for use with a PC and SIMATIC PDM)	D) <b>7MF4997-1DA</b>
HART modem/USB (for use with a PC and SIMATIC PDM)	D) <b>7MF4997-1DB</b>
One metallic cable gland M20x1.5, rated -40 ... +80 °C (-40 ... +176 °F), HART	<b>7ML1930-1AP</b>
One metallic cable gland M20x1.5, rated -40 ... +80 °C (-40 ... +176 °F), PROFIBUS PA and FOUNDATION Fieldbus <sup>7)</sup>	<b>7ML1930-1AQ</b>
FDA approved FKM o-ring for 2" G (BSPP) process connections -28 ... +80 °C (-28 ... +176 °F)	<b>7ML1830-3AN</b>
SITRANS RD100 Remote display - see Chapter 8	
SITRANS RD200 Remote display - see Chapter 8	
SITRANS RD500 web, datalogging, alarming, ethernet, and modem support for instrumentation - see Chapter 8	K) <b>7ML5750- 1AA00-0</b>

- 1) Available with Enclosure option 1 only  
 2) To be used with Communication options 1 and 3 only.  
 Connector has IP67 rating.  
 3) Available with Approvals option A, B, or C only  
 4) Available with Enclosure option 0 only  
 5) Applicable to Communication option 2 only  
 6) Available with Approval options A to E only  
 7) For use with Communication option 1 and 3 only
- C) Subject to export regulations AL: N, ECCN: EAR99.  
 D) Subject to export regulations AL: N, ECCN: EAR99R.  
 K) Subject to export regulations AL: N, ECCN: 5A991X.

#### Characteristic curves

Pressure/Temperature Curve

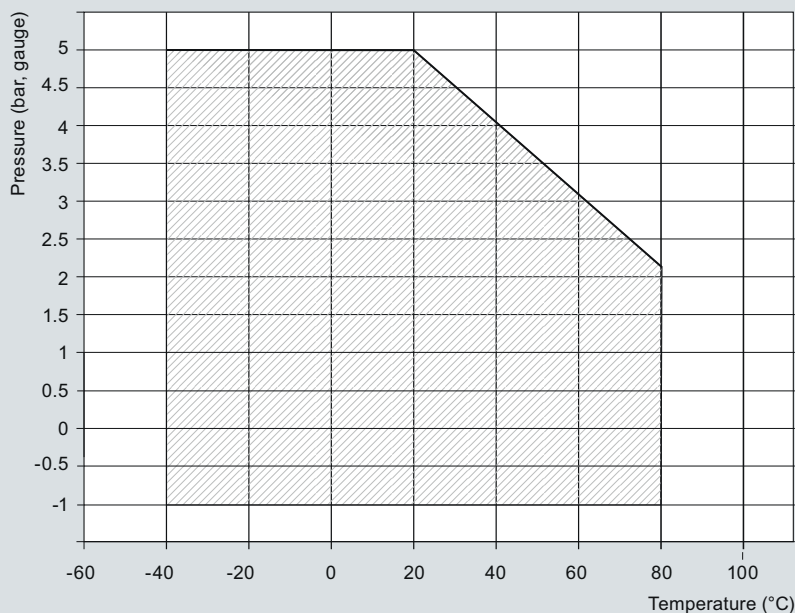

SITRANS LR250 PVDF antenna pressure/temperature curve




# Level Measurement

## Continuous level measurement – Radar transmitters


### SITRANS LR250 threaded PVDF antenna

#### Dimensional drawings

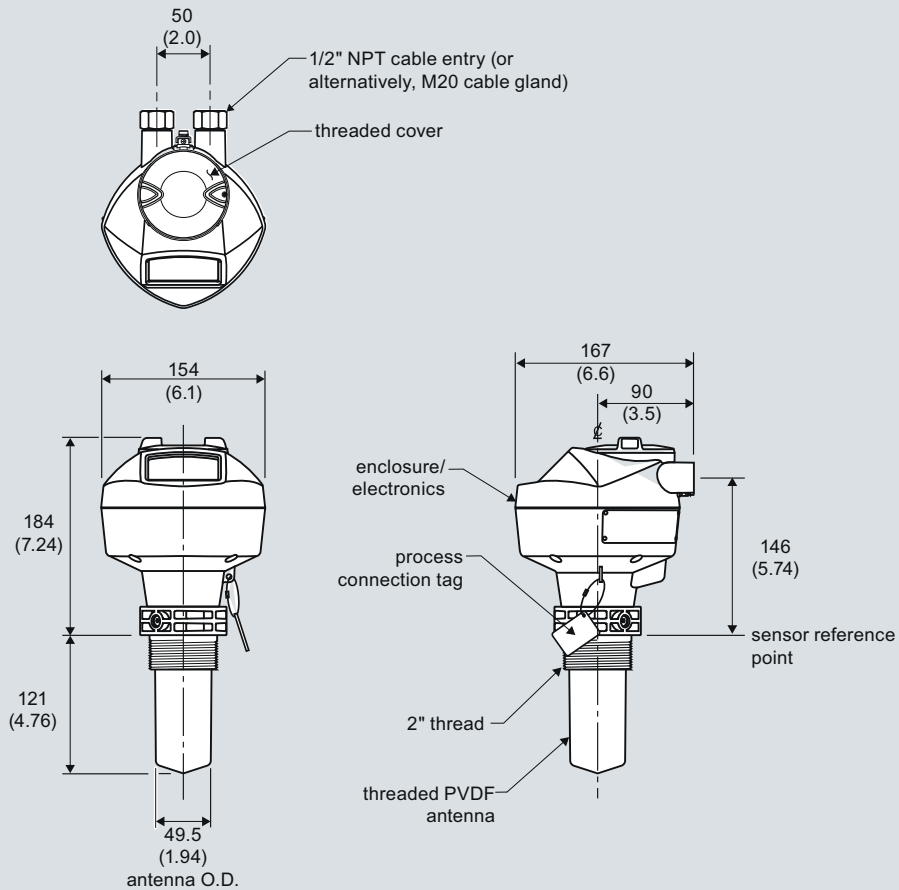

SITRANS LR250 PVDF antenna, dimensions in mm (inch)

#### Schematics

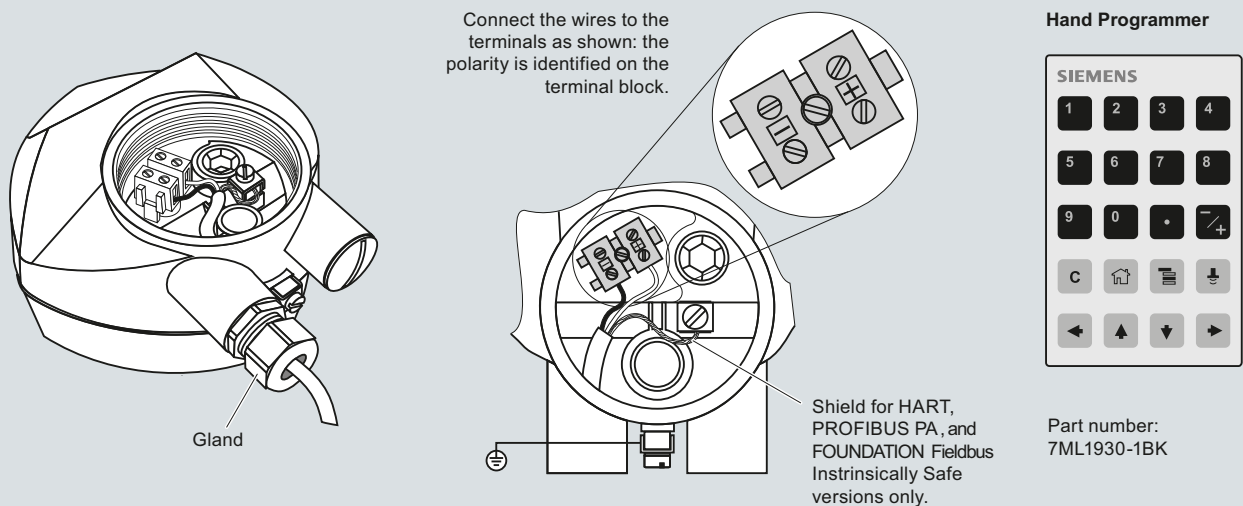

#### Notes:

1. DC terminal shall be supplied from a source providing electrical isolation between the input and output, to meet the applicable safety requirements of IEC 61010-1.
2. All field wiring must have insulation suitable for rated input voltages.
3. Use shielded twisted pair cable (14 to 22 AWG) for HART version.
4. Separate cables and conduit may be required to conform to standard instrumentation wiring practices or electrical codes.



# Level Measurement

## Continuous level measurement – Radar transmitters

### SITRANS LR250 threaded PVDF Specials

SITRANS LR250 threaded PVDF Specials	Order No.
<b>SITRANS LR250 threaded PVDF antenna version enclosures (PROFIBUS PA models)</b>	
LR250 threaded PVDF antenna version enclosure with board stack, M20 cable inlet, approval option A, with PROFIBUS PA communication, no process connection	<b>A5E03588171</b>
LR250 threaded PVDF antenna version enclosure with board stack, NPT cable inlet, approval option A, with PROFIBUS PA communication, no process connection	<b>A5E03588253</b>
LR250 threaded PVDF antenna version enclosure with board stack, NPT cable inlet, approval option B, with PROFIBUS PA communication, no process connection	<b>A5E03588512</b>
LR250 threaded PVDF antenna version enclosure with board stack, M20 cable inlet, approval option C, with PROFIBUS PA communication, no process connection	<b>A5E03589260</b>
LR250 threaded PVDF antenna version enclosure with board stack, M20 cable inlet, approval option D, with PROFIBUS PA communication, no process connection	<b>A5E03589262</b>
LR250 threaded PVDF antenna version enclosure with board stack, M20 cable inlet, approval option E, with PROFIBUS PA communication, no process connection	<b>A5E03589264</b>
<b>SITRANS LR250 threaded PVDF antenna version enclosures (FOUNDATION Fieldbus models)</b>	
LR250 horn version enclosure with board stack, M20 cable inlet, approval option A, with FOUNDATION Fieldbus communication, no process connection	<b>A5E03589266</b>
LR250 horn version enclosure with board stack, NPT cable inlet, approval option A, with FOUNDATION Fieldbus communication, no process connection	<b>A5E03589275</b>
LR250 horn version enclosure with board stack, NPT cable inlet, approval option B, with FOUNDATION Fieldbus communication, no process connection	<b>A5E03589277</b>
LR250 horn version enclosure with board stack, M20 cable inlet, approval option C, with FOUNDATION Fieldbus communication, no process connection	<b>A5E03589280</b>
LR250 horn version enclosure with board stack, NPT cable inlet, approval option D, with FOUNDATION Fieldbus communication, no process connection	<b>A5E03589281</b>
LR250 horn version enclosure with board stack, M20 cable inlet, approval option E, with FOUNDATION Fieldbus communication, no process connection	<b>A5E03589283</b>

SITRANS LR250 threaded PVDF Specials	Order No.
<b>SITRANS LR250 threaded PVDF antenna version enclosures (&lt; 3.6 mA start-up HART models)</b>	
LR250 horn version enclosure with board stack, M20 cable inlet, approval option A, with HART communication start-up at < 3.6 mA, no process connection	<b>A5E03569747</b>
LR250 horn version enclosure with board stack, NPT cable inlet, approval option A, with HART communication start-up at < 3.6 mA, no process connection	<b>A5E03586807</b>
LR250 horn version enclosure with board stack, NPT cable inlet, approval option B, with HART communication start-up at < 3.6 mA, no process connection	<b>A5E03586854</b>
LR250 horn version enclosure with board stack, M20 cable inlet, approval option C, with HART communication start-up at < 3.6 mA, no process connection	<b>A5E03586887</b>
LR250 horn version enclosure with board stack, NPT cable inlet, approval option D, with HART communication start-up at < 3.6 mA, no process connection	<b>A5E03586961</b>
LR250 horn version enclosure with board stack, M20 cable inlet, approval option E, with HART communication start-up at < 3.6 mA, no process connection	<b>A5E03587012</b>
LR250 horn version enclosure with board stack, M20 cable inlet, approval option F, with HART communication start-up at < 3.6 mA, no process connection	<b>A5E03587132</b>
LR250 horn version enclosure with board stack, M20 cable inlet, approval option G, with HART communication start-up at < 3.6 mA, no process connection	<b>A5E03587223</b>
LR250 horn version enclosure with board stack, NPT cable inlet, approval option H, with HART communication start-up at < 3.6 mA, no process connection	<b>A5E03588125</b>
<b>SITRANS LR250 threaded PVDF antenna kits</b>	
Antenna kit 2" NPT threaded PVDF	<b>A5E03528941</b>
Antenna kit 2" R (BSPT) threaded PVDF	<b>A5E03528943</b>
Antenna kit 2" G (BSPP) threaded PVDF	<b>A5E03528947</b>
Kit of hardware parts for LR250 threaded PVDF antenna	<b>A5E03528948</b>