


FEATURES/CARATTERISTICHE

Materials available/Materiali disponibili:	PP; PVDF
Max flow/Portata massima:	35 m ³ /h
Max head/Prevalenza massima:	24 m
Max temperature/Temperaturatura massima:	PP 60°C; PVDF 90°C
Max viscosity/Viscosità massima:	200 cSt
Pressure rating/Pressione nominale massima:	NP/PN 6 @ 20°C
Pump weight/Peso pompa:	PP: 8.0 Kg; PVDF: 8.9 Kg
Motor weight/Peso motore (approx.):	2.2 kW: 13 Kg 3.0 kW: 23 Kg 4.0 kW: 31 Kg

SECTION AND PARTS LIST/SEZIONE E LISTA PARTI

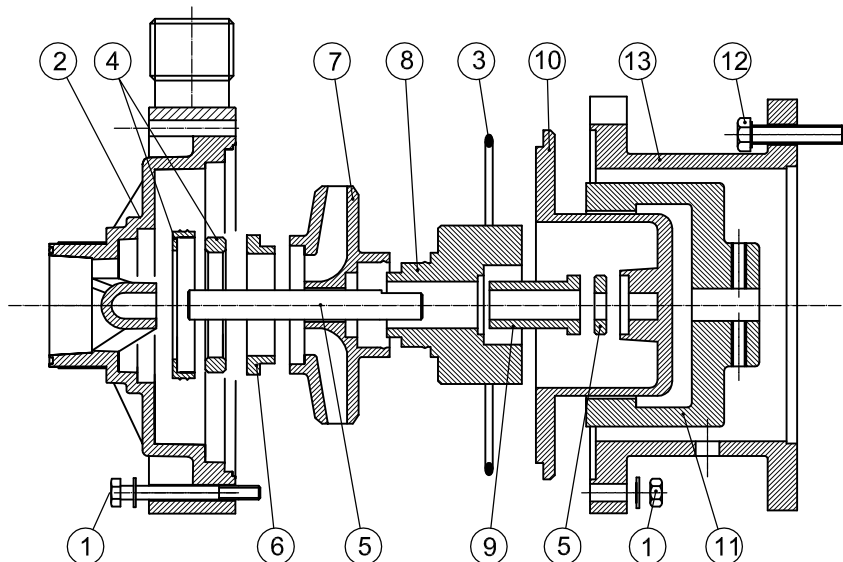

POS.	1	2	3	4	5	6	7	8	9	10	11	12	13
PART DESCR.	SET SCREWS	FRONT CASING	O-RING	CASING THRUST BUSH	SHAFT+RING	IMPELLER THRUST BEARING	IMPELLER	INT. MAGNET	BEARING	REAR CASING	EXT. MAGNET	SET SCREWS	BRACKET
MATERIALS	AlSi304	PP+GF PVDF+CF	EPDM VITON	Al ₂ O ₃ EPDM VITON	Al ₂ O ₃	PTFEC	PP PVDF	PP PVDF NeFeb	PTFEC	PP+GF PVDF+CF	Fe NeFeb	AlSi304	PP

CURVES/CURVE 50HZ-2900 RPM

