
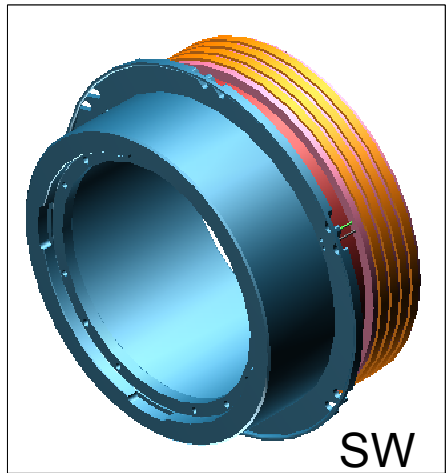
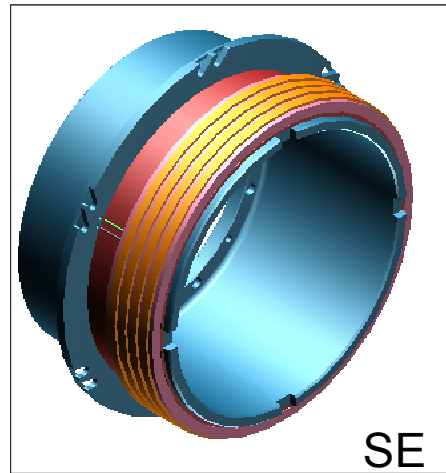
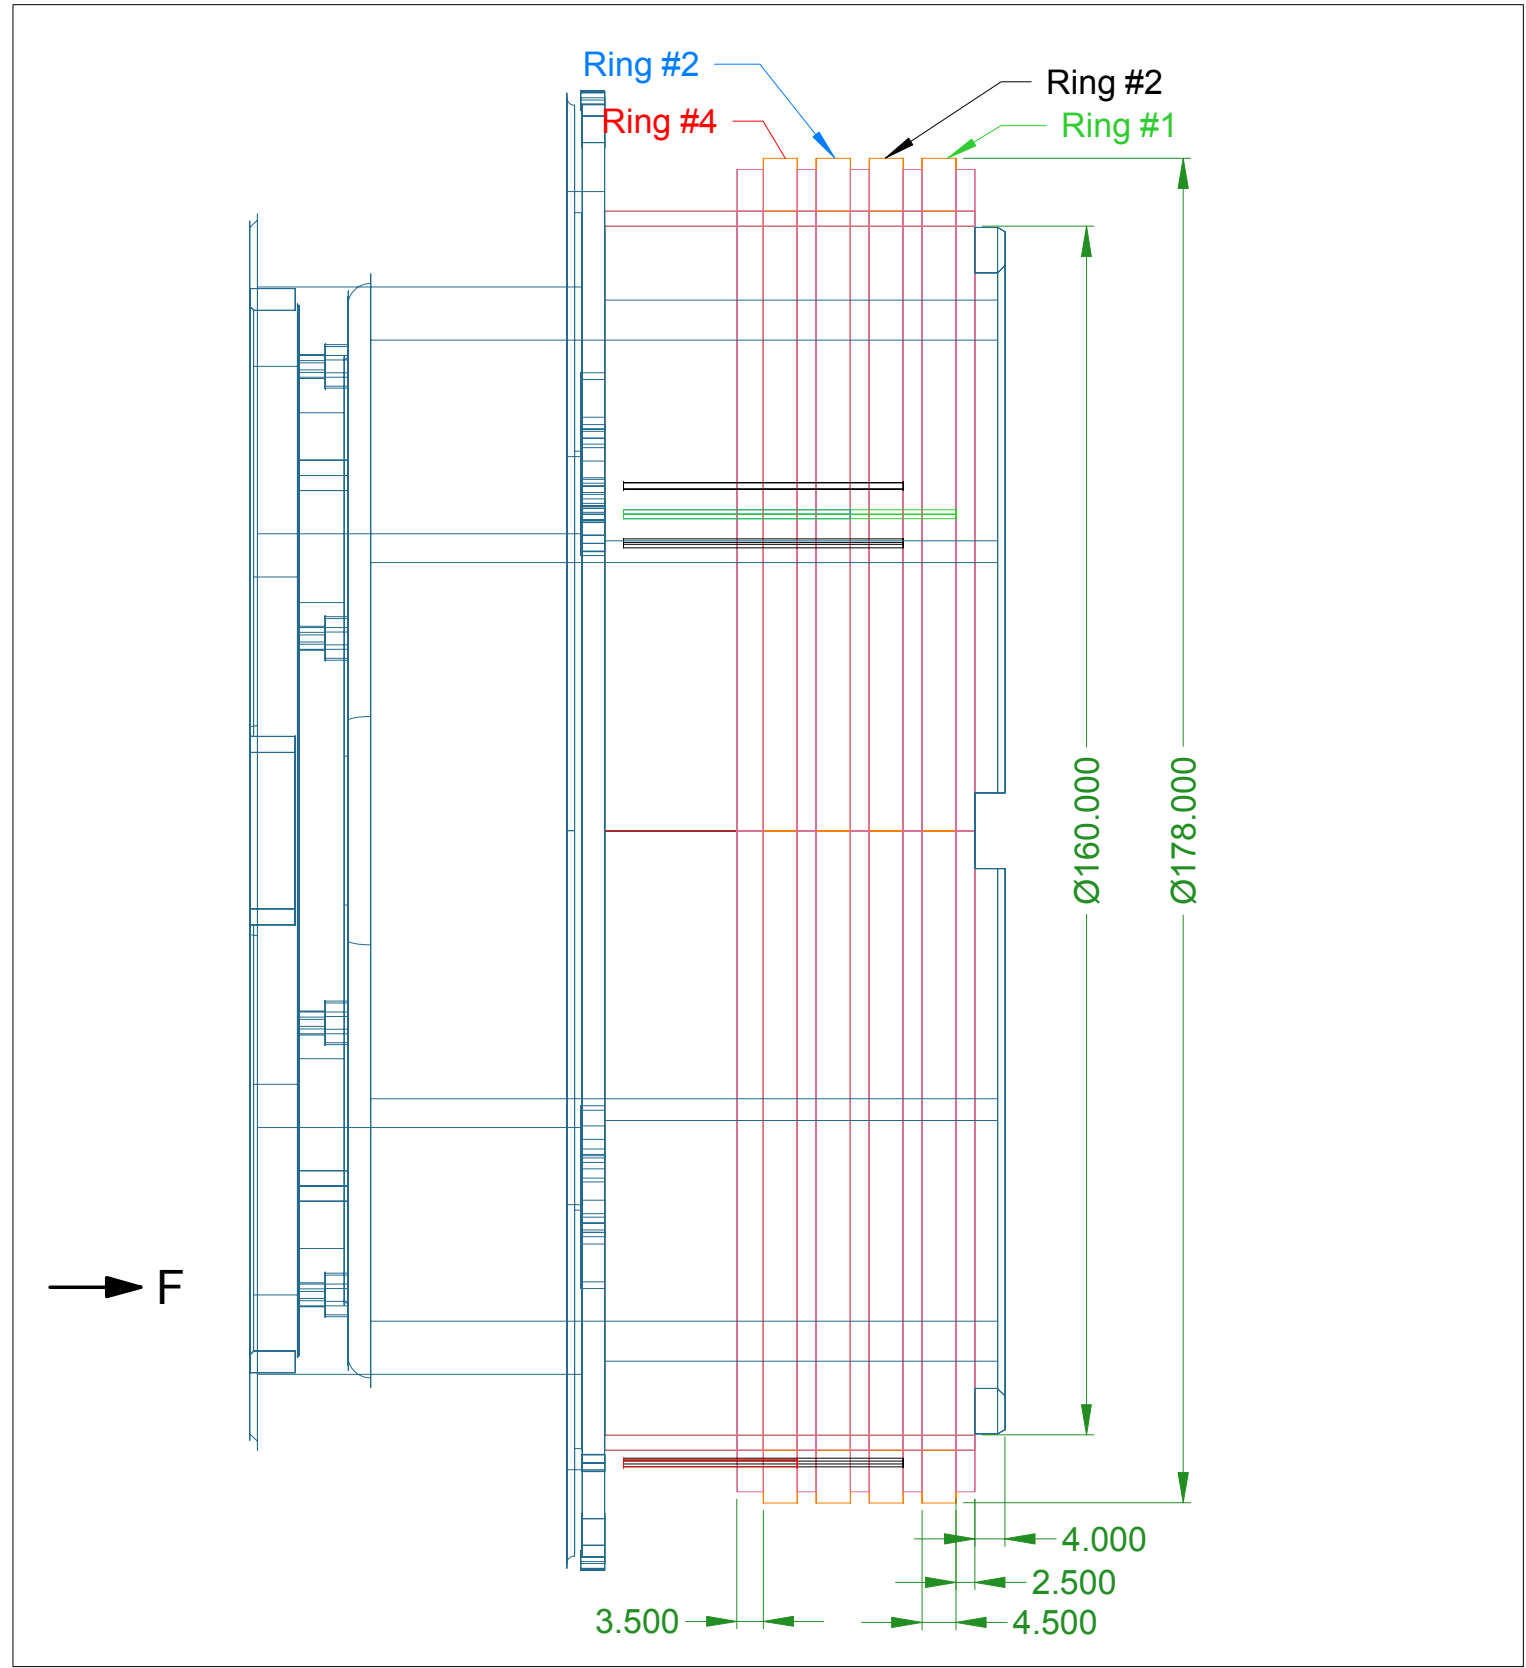


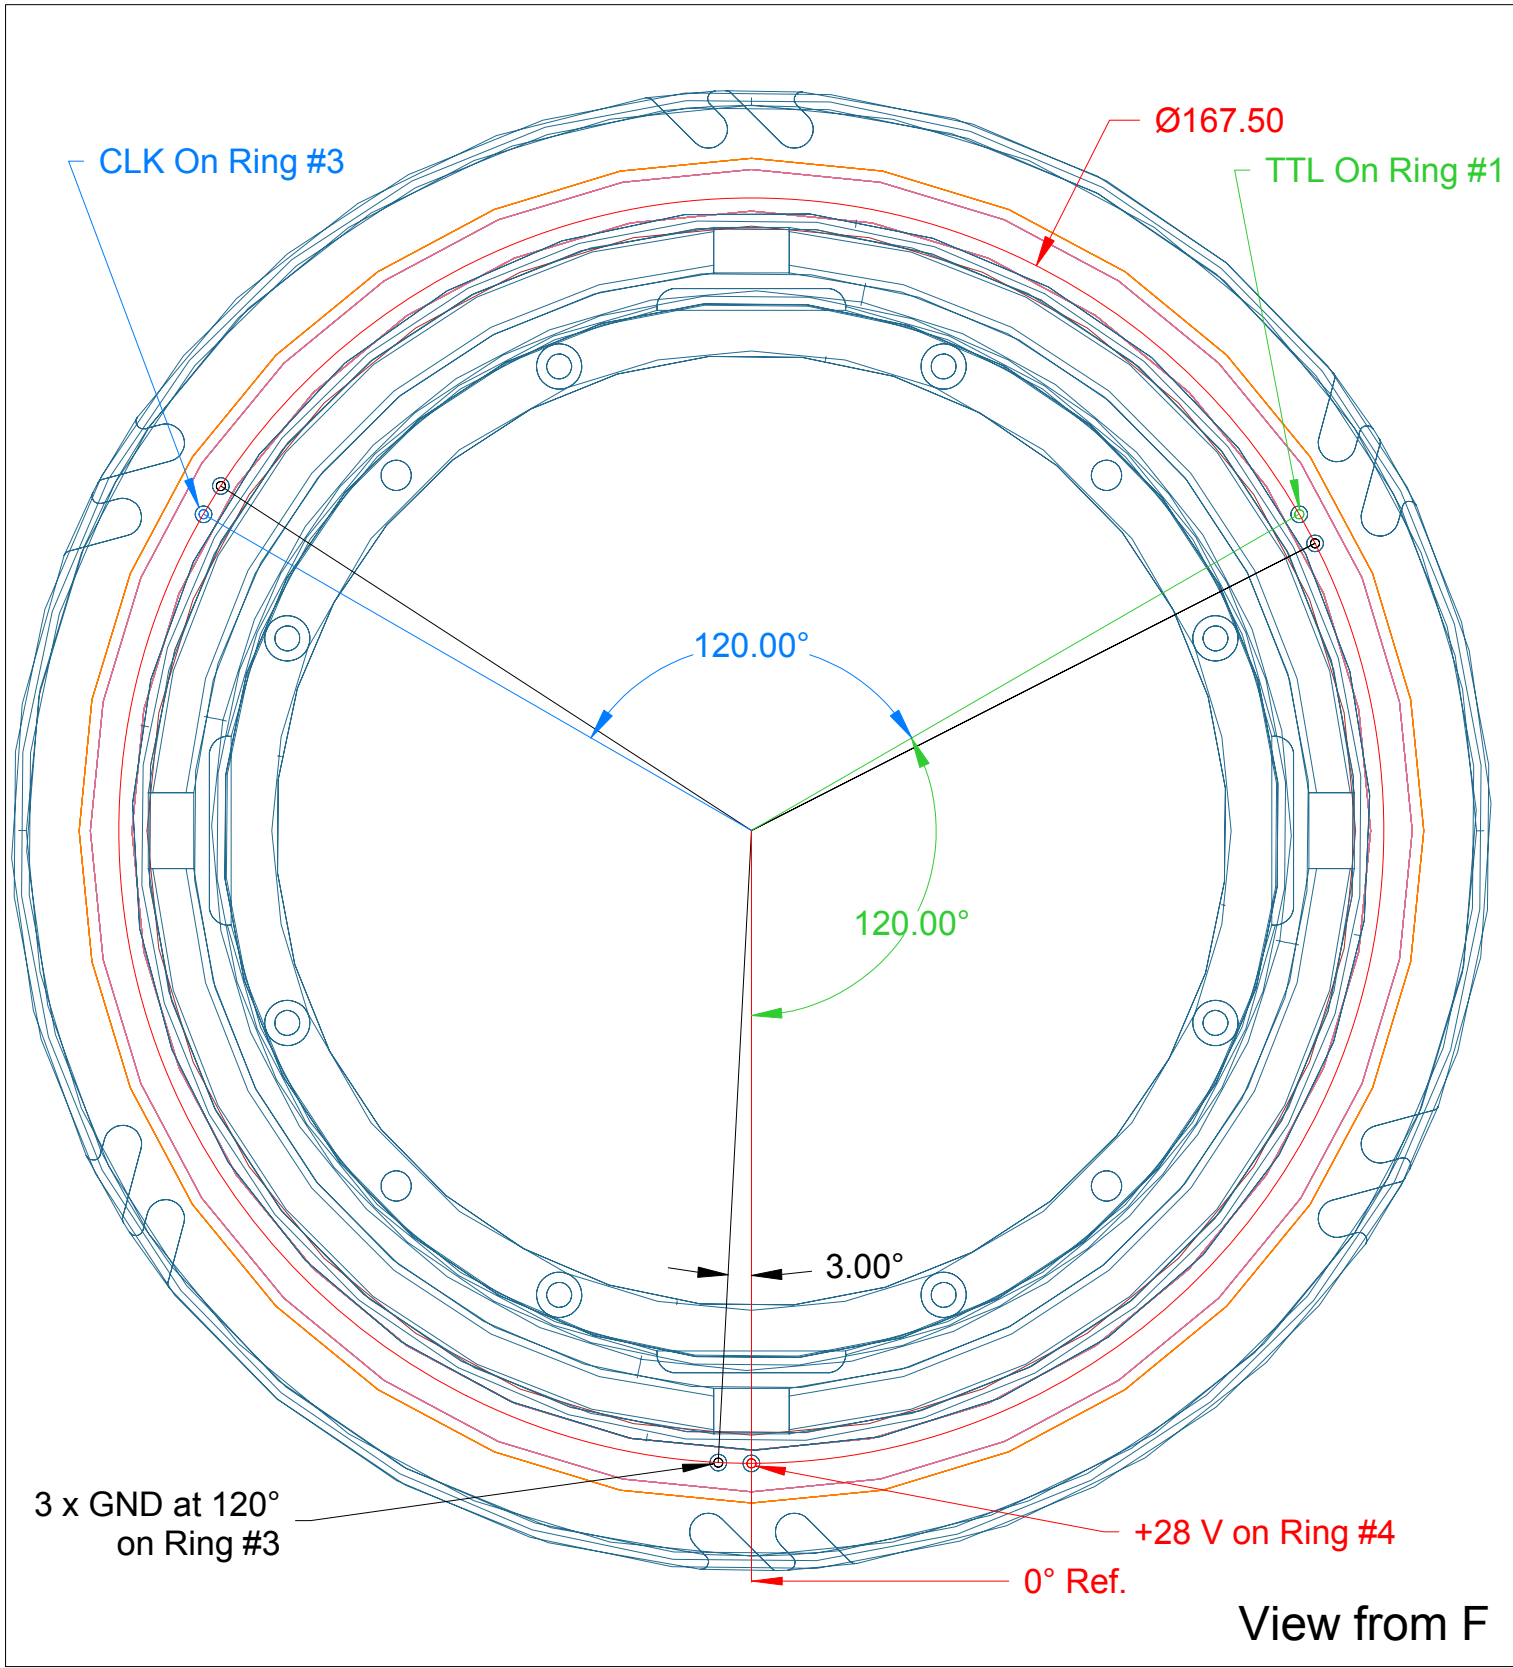

SPECIFICATIONS

Rotation Speed : 6000 tr/min

Operational Life > 1000 h


Brush Holders : Type TU 34 qty. 8 per Slip Ring

Ring #1 : TTL transmission 440 Mbps

Ring #2 : GND return, 5 A max.

Ring #3 : Clock x 3, Sine Signal 37 MHz, 12 V

Ring #4 : Power Supply, +28 V, 5 A max.



Ker Ideas
Serving Imagination

Ker Ideas SARL
1822 Chemin de la Clare
83270 Saint Cyr sur Mer
GPS : 43,186034 N ; 5,725324 E
Téléphone : +33 (0)
GSM : +33 (0)6 41 66 65 31
E-mail : paul.ansquer@kerideas.com
Site Web : www.kerideas.com

View Style: 

Dimensions in: mm

Checked by:

Date:

Visa:

Approved by:

Date:

Visa:

V 1.0	P. Ansquer	First edition	2011-09-29	PA
Version	Drafted by :	Description of Modifications	Date	Visa
Material:	Aluminum 7075 T6		Specification #	
			Flatness < 0.05	
Z49 - Front Slip Ring			General tolerance: ±0.1	
			Scale: 1/1 true	
Buy	Dwg. N°: X XXX XXX	Sheet 1/1	Assy n°: x xxx xxx	
Make			Part List n°: x xxx xxx PL	