

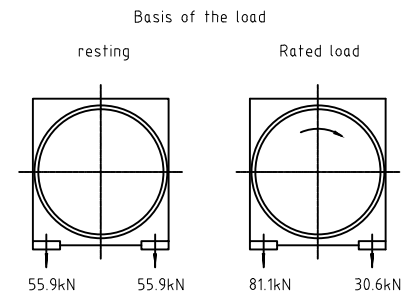
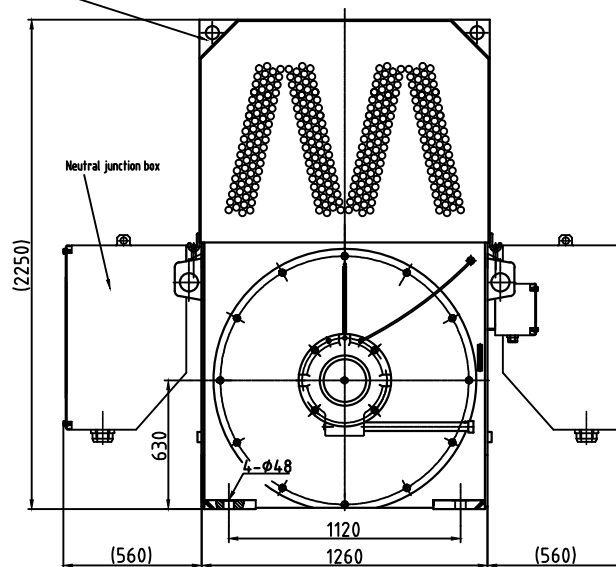


The lug is only for lifting the cooler



Suddenly two phase short circuit



Preliminary information is for reference only

Measure box wiring diagram



TYPE	RATED SPEED R/MIN	RATED CURRENT A	EFF %	P.F COS ϕ	LOCKED CURRENT RATED CURRENT	LOCKED TORQUE RATED TORQUE	MAX TORQUE RATED TORQUE	WEIGHT
YKK-630-8	744	289.5	95.6	0.85	6.0	0.7	1.8	11400KG

THIS DOCUMENT CONTAINS PROPRIETARY AND CONFIDENTIAL INFORMATION AND MAY NOT BE DISCLOSED TO OTHERS FOR ANY PURPOSE OR USED FOR MANUFACTURING PURPOSES WITHOUT WRITTEN PERMISSION FROM PINNUN MOTOR CO.,LTD.

REMARKS



BOOK NO.

ALL DIMENSION IN MM
DO NOT SCALE DRAWING

1	1	P	MOTOR	A4	2200KW 5400V 50Hz IP55 IC611 IMB3 744RPM
ITEM NO.	PCS PER UNIT	SC	PART NAME	DWG SIZE	SPECIFICATION
7					
6					
5					
4					
3					
2					
1					
NO.	REVISION	BY	DATE	CHK'D BY:	DATE:
				DATE: 30-07-20	

MOTOR

STANDARD TOLERANCE
ISO 2768-m
IF NOT OTHERWISE
SPECIFIED
X. = +/- .25
X.X = +/- .12
X.XX = +/- .06
X.XXX = +/- .03
ANGLE +/- 1DEGR

SEIPEE^R

Quality Achieve Your Success

SIZE	DRAWING NUMBER	REV.
A4	20-07-30005	0