


TIPO SBPF 200


supporto a flangia circolare
in lamiera di acciaio, serie leggera

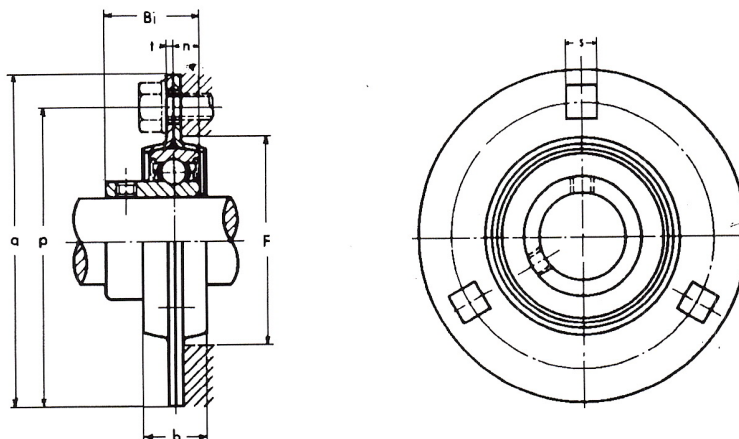

TIPO	→	a	p	b	F (min.)	s	t	n	Bi	Massa [kg]	Carico radiale ammissibile [kN]	Cuscinetto tipo
SBPF 201	12	81	63	14	49	7	2,0	6,0	22	0,27	2,7	SB 201
SBPF 202	15											SB 202
SBPF 203	17											SB 203
SBPF 204	20	90	71	16	56	9	2,0	7,0	25	0,33	3,2	SB 204
SBPF 205	25	95	76	18	60	9	2,0	7,5	27	0,38	3,6	SB 205
SBPF 206	30	113	90	18	71	11	2,6	8,0	30	0,62	5,0	SB 206
SBPF 207	35	122	100	20	81	11	2,6	8,5	32	0,80	6,4	SB 207

TIPO SBPFD 200

supporto a flangia triangolare
in lamiera di acciaio, serie leggera

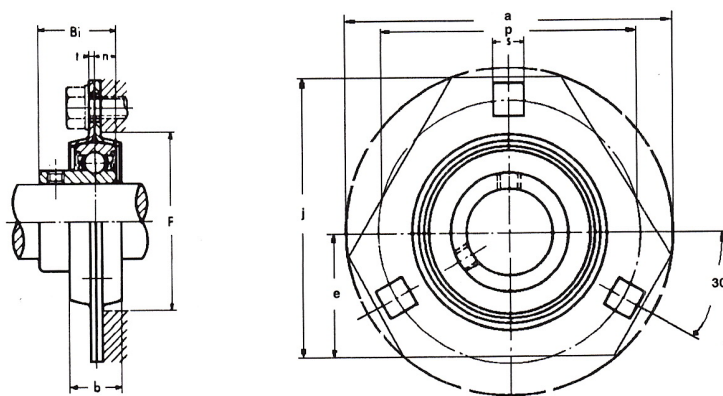

TIPO	→	a	p	b	F (min.)	e	j	s	n	Bi	Massa [kg]	Carico radiale ammissibile [kN]	Cuscinetto tipo
SBPFD 201	12	82	64	16	49	30,7	69,6	7	6,0	22	0,27	2,7	SB 201
SBPFD 202	15												SB 202
SBPFD 203	17												SB 203
SBPFD 204	20	91	71	17	56	33,3	76,2	9	7,0	25	0,33	3,2	SB 204
SBPFD 205	25	95	76	20	60	34,9	79,4	9	7,5	27	0,38	3,6	SB 205
SBPFD 206	30	113	90	20	71	38,1	93,7	11	8,0	30	0,62	5,0	SB 206
SBPFD 207	35	122	100	20	81	42,0	100,5	11	8,5	32	0,82	6,4	SB 207

Misure in mm non impegnative