
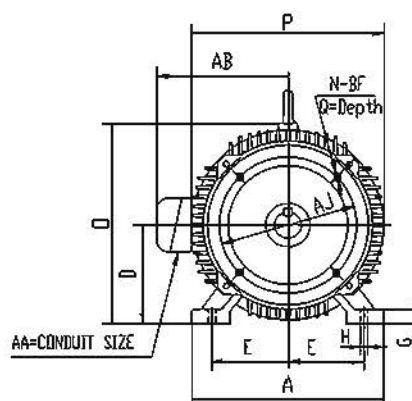

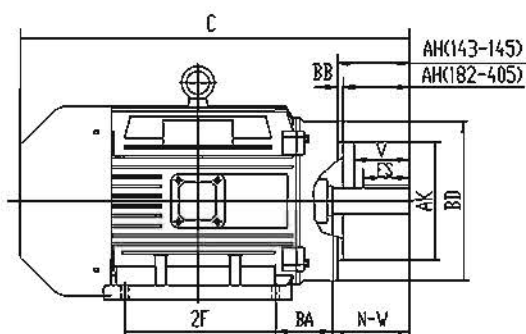
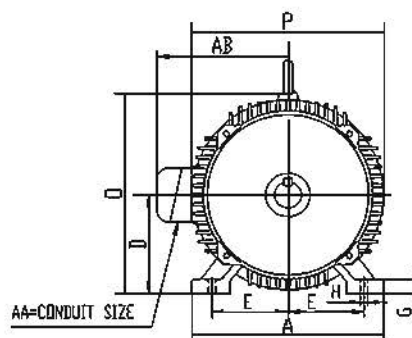



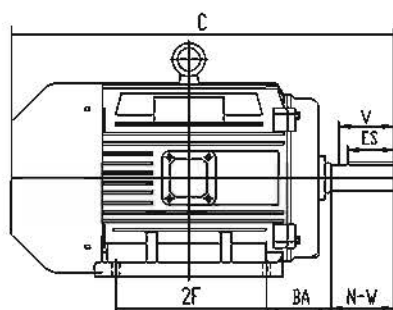

INCHES

NEMA FRAME	A	C	D	E	2F	G	H	AA	O	P	BA (*)	AB	AJ	AK	BB Min	AH	BD Max	N	BF	Q	SHAFT DIMENSION			KEYSEAT		
																					N-W	U	V	R	ES	S
143T	7.0	13.3	3.50	2.75	4.00	0.50	0.34	0.75	7.3	7.5	2.25	6.5	5.875	4.5	0.16	2.13	6.5	4	0.375-16	0.56	2.25	0.875	2.00	0.771	1.41	0.188
145T		14.3			5.00						(2.75)										2.25	0.875	2.00	0.771	1.41	0.188
182T		16.3			4.50						2.75										2.75	1.125	2.50	0.986	1.78	0.250
184T	9.0	17.3	4.50	3.75	5.50	0.65	0.41	1.25	9.4	9.7	(3.50)	8.2	7.250	8.5	0.25	2.63	9.0	4	0.500-13	0.75	2.75	1.125	2.50	0.986	1.78	0.250
213T	10.6	21.3	5.25	4.25	5.50	0.82	0.41	1.25	11.3	12.0	3.50	9.5	7.250	8.5	0.25	3.13	9.0	4	0.500-13	0.75	3.38	1.375	3.12	1.201	2.41	0.312
215T		22.9			7.00						(4.25)										3.38	1.375	3.12	1.201	2.41	0.312
254T		25.6			8.25						(4.75)										4.00	1.625	3.75	1.416	2.91	0.315
256T	12.2	27.3	6.25	5.00	10.00	0.90	0.53	1.25	13.3	13.0	4.25	10.2	7.250	8.5	0.25	3.75	9.5	4	0.500-13	0.75	4.00	1.625	3.75	1.416	2.91	0.315
284T		28.6			9.50																4.62	1.875	4.38	1.591	3.28	0.500
286T		28.6			11.00																4.62	1.875	4.38	1.591	3.28	0.500
284TS		27.2			9.50																3.25	1.625	3.00	1.416	1.91	0.375
286TS		27.2			11.00																3.25	1.625	3.00	1.416	1.91	0.375
324T	15.5	34.4	8.00	6.25	10.50	1.10	0.66	2	16.5	16.7	5.25	14.4	11.00	12.5	0.25	5.00	13.1	4	0.625-11	0.94	5.25	2.125	5.00	1.845	3.91	0.500
326T		36.0			12.00																5.25	2.125	5.00	1.845	3.91	0.500
324TS		32.9			10.50																3.75	1.875	3.50	1.591	2.03	0.500
326TS		34.5			12.00																3.75	1.875	3.50	1.591	2.03	0.500
364T	17.2	39.0	9.00	7.00	11.25	1.25	0.66	3	18.3	18.5	5.88	15.6	11.00	12.5	0.25	5.63	13.1	8	0.625-11	0.94	5.88	2.375	5.62	2.021	4.28	0.500
365T		40.6			12.25																5.88	2.375	5.62	2.021	4.28	0.500
364TS		36.5			11.25																3.75	1.875	3.50	1.591	2.03	0.500
365TS		38.0			12.25																3.75	1.875	3.50	1.591	2.03	0.500
404T	19.4	37.4	10.00	8.00	12.25	1.25	0.81	3	20.6	20.7	6.62	17.5	11.00	12.5	0.25	7.00	13.2	8	0.625-11	0.94	7.25	2.875	7.00	2.450	5.65	0.750
405T		42.6			13.75																4.25	2.125	4.00	1.845	2.78	0.500
405TS		39.5			13.75																4.25	2.125	4.00	1.845	2.78	0.500
444T		52.9			14.50																8.50	3.375	8.25	2.880	6.91	0.875
445T	21.5	52.9	11.00	9.00	16.50	1.38	0.81	3	23.3	24.6	7.50	19.0	14.00	16.0	0.25	8.25	17.1	8	0.625-11	0.94	8.50	3.375	8.25	2.880	6.91	0.875
444TS		49.1			14.50																4.75	2.375	4.50	2.021	3.03	0.625
445TS		49.1			16.50																4.75	2.375	4.50	2.021	3.03	0.625
447T	21.5	52.9	11.00	9.00	20.00	1.38	0.81	3	23.3	24.6	7.50	19.0	14.00	16.0	0.25	8.25	17.1	8	0.625-11	0.94	8.50	3.375	8.25	2.880	6.91	0.875
449T		52.9			25.00																4.75	2.375	4.50	2.021	3.03	0.625
447TS		49.1			20.00																4.75	2.375	4.50	2.021	3.03	0.625

(*)NEMA C face BA dimensions.