



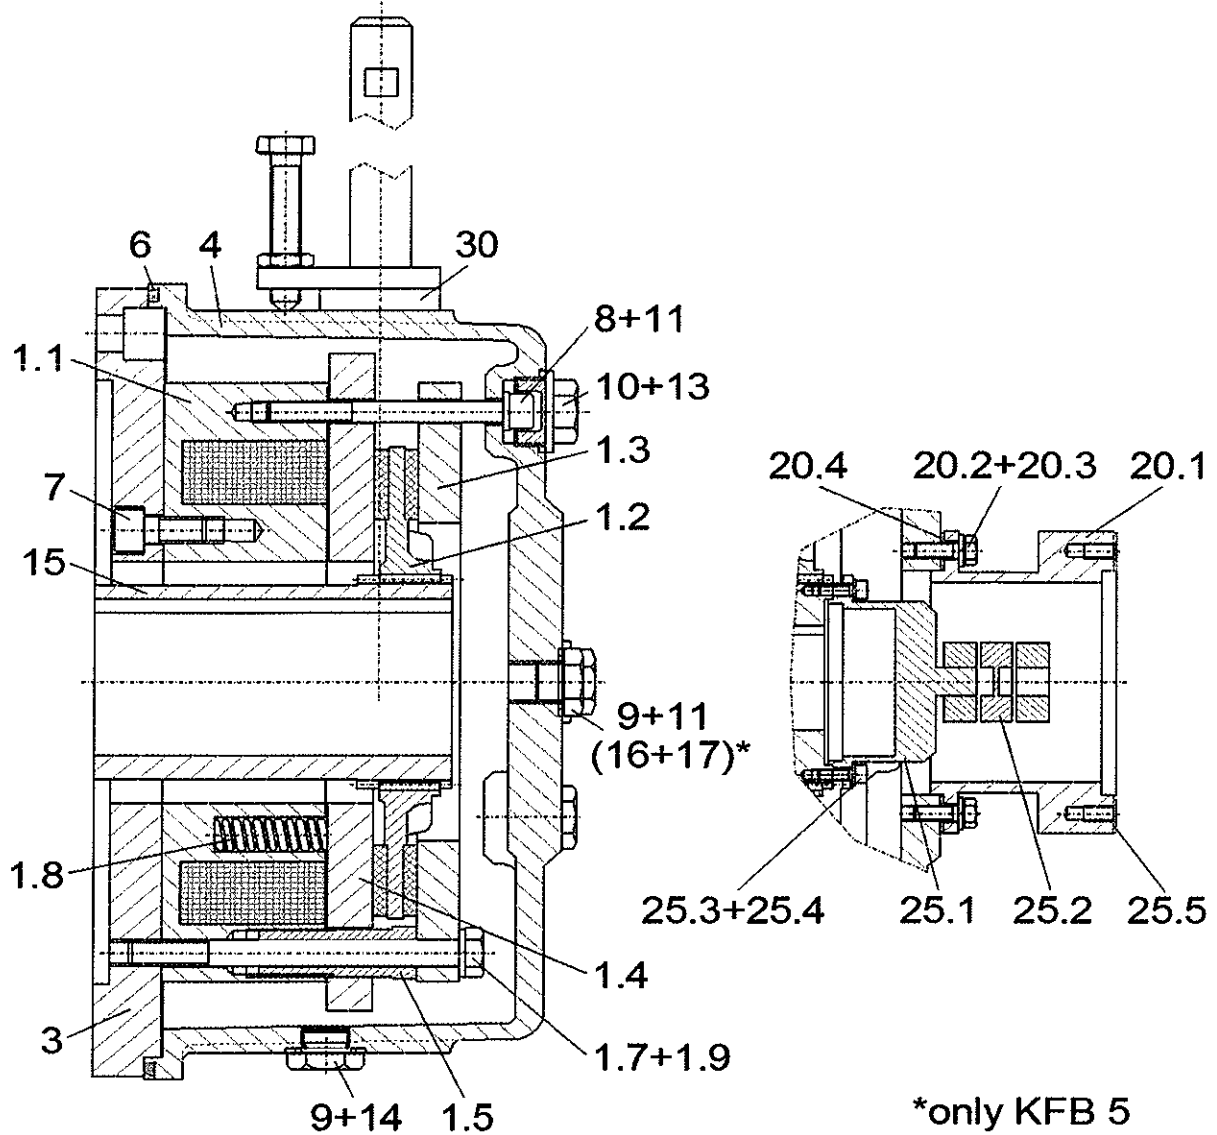

Manual release
(shown off-set by 90°)

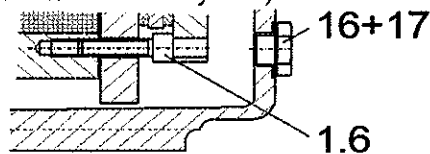


Please supply the following details when ordering spare parts:

- Dimension of the brake (type)
- Brake serial number
- Description of the spare part
- Quantity required
- Id.-No. of the spare part

Type, serial number of the brake and the coil voltage are specified on the rating plate.

Rating plate

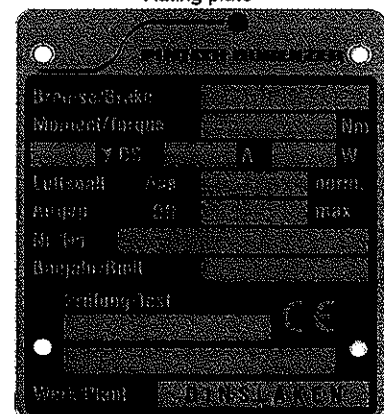

Datum
15.12.2010

erstellt
PiBu / Loet

geprüft
PiBu / Tho

ÄM-Nr.
A / 8-Tho10128

a01 347 000-958

Spare part Electromagnetic Spring-Set-Brake Series KFB 160					 PINTSCH RUBENZER
pos.	description	qty.	dimension / standard	kg/piece	P.B. Id.-No.
1.1	coil body group	1	voltage see rating plate	44,00	<i>type specific</i>
1.2	friction lining group	1	D 318/d 110 x 42 22 teeth	2,80	000 581 701-214
1.3	brake flange	1	D 388/d 230 x 22,5	12,90	001 222 000-214
1.4	armature plate f. 2MS/PS	1	D 398/d 157 x 28	22,20	001 221 800-214
1.5	adjusting bolt	3	D 30/M 30x1,5 x 91		content of Pos. 40
1.6	socket head screw TUF-LOC	2	M 10x50 / ISO 4762		content of Pos. 35
1.7	hexagon screw	3	M 16x160 / ISO 4014		content of Pos. 40
1.8	pressure spring	32	D 16 x 71	0,01	047 010 016-012
1.9					
3.0.1	intermediate flange	1	standard flange A450	27,60	001 222 200-214
3.0.2		1	standard flange A550	40,50	001 222 300-214
3.0.3		1	special flange		<i>type specific</i>
4.0.1	housing	1	normal housing A450	30,20	001 220 200-214
4.0.3		1	special housing		<i>type specific</i>
6.0.1	O-ring f. housing A450	1	420 x 5 NBR		content of Pos. 35
7	socket head screw	12	M 12x30 / ISO 4762	0,01	031 411 604-200
8	socket head screw	3	M 8x100 / ISO 4762		content of Pos. 35
9	lock bolt	6	M 16x1,5 / DIN 7604		content of Pos. 35
10	lock bolt	3	M 26x1,5 / DIN 7604		content of Pos. 35
11	washer	3	B 8,4 / DIN 9021-140HV-A2		content of Pos. 35
13	sealing ring	3	A 26x31 / DIN 7603		content of Pos. 35
14	sealing ring	6	A 16x20 / DIN 7603		content of Pos. 35
15	hub (pinion)	1			<i>type specific</i>
20	Bush set, tacho optional	1	contains: Pos. 20.1-20.5		<i>length</i> <i>type specific</i>
25	Tacho tappet set optional	1	contains: Pos. 25.1-25.5	7,00	001 204 600-214
30	Handlever group optiona	1		3,20	001 222 600-214
35	Screw and sealing set	1	contains: Pos. 1.6, 6.01, 8-14	0,50	001 345 504-214
40	Adjusting screw set	1	contains: Pos. 1.5, 1.7, 1.9	1,10	001 345 608-214

Positions see assembly drawing a01 347 000-958

Validity 01.01.2014 31.12.2014	erstellt	geprüft	genehmigt	a01 220 000-910
--------------------------------------	----------	---------	-----------	-----------------