


POMPE CENTRIFUGHE PER CHIMICA normalizzate ISO 2858 / DIN 24 256
Chemical process pumps complying with ISO 2858 / DIN 24 256
DIMENSIONI D'INGOMBRO E MASSE
Overall dimensions and weights

RN-RKN

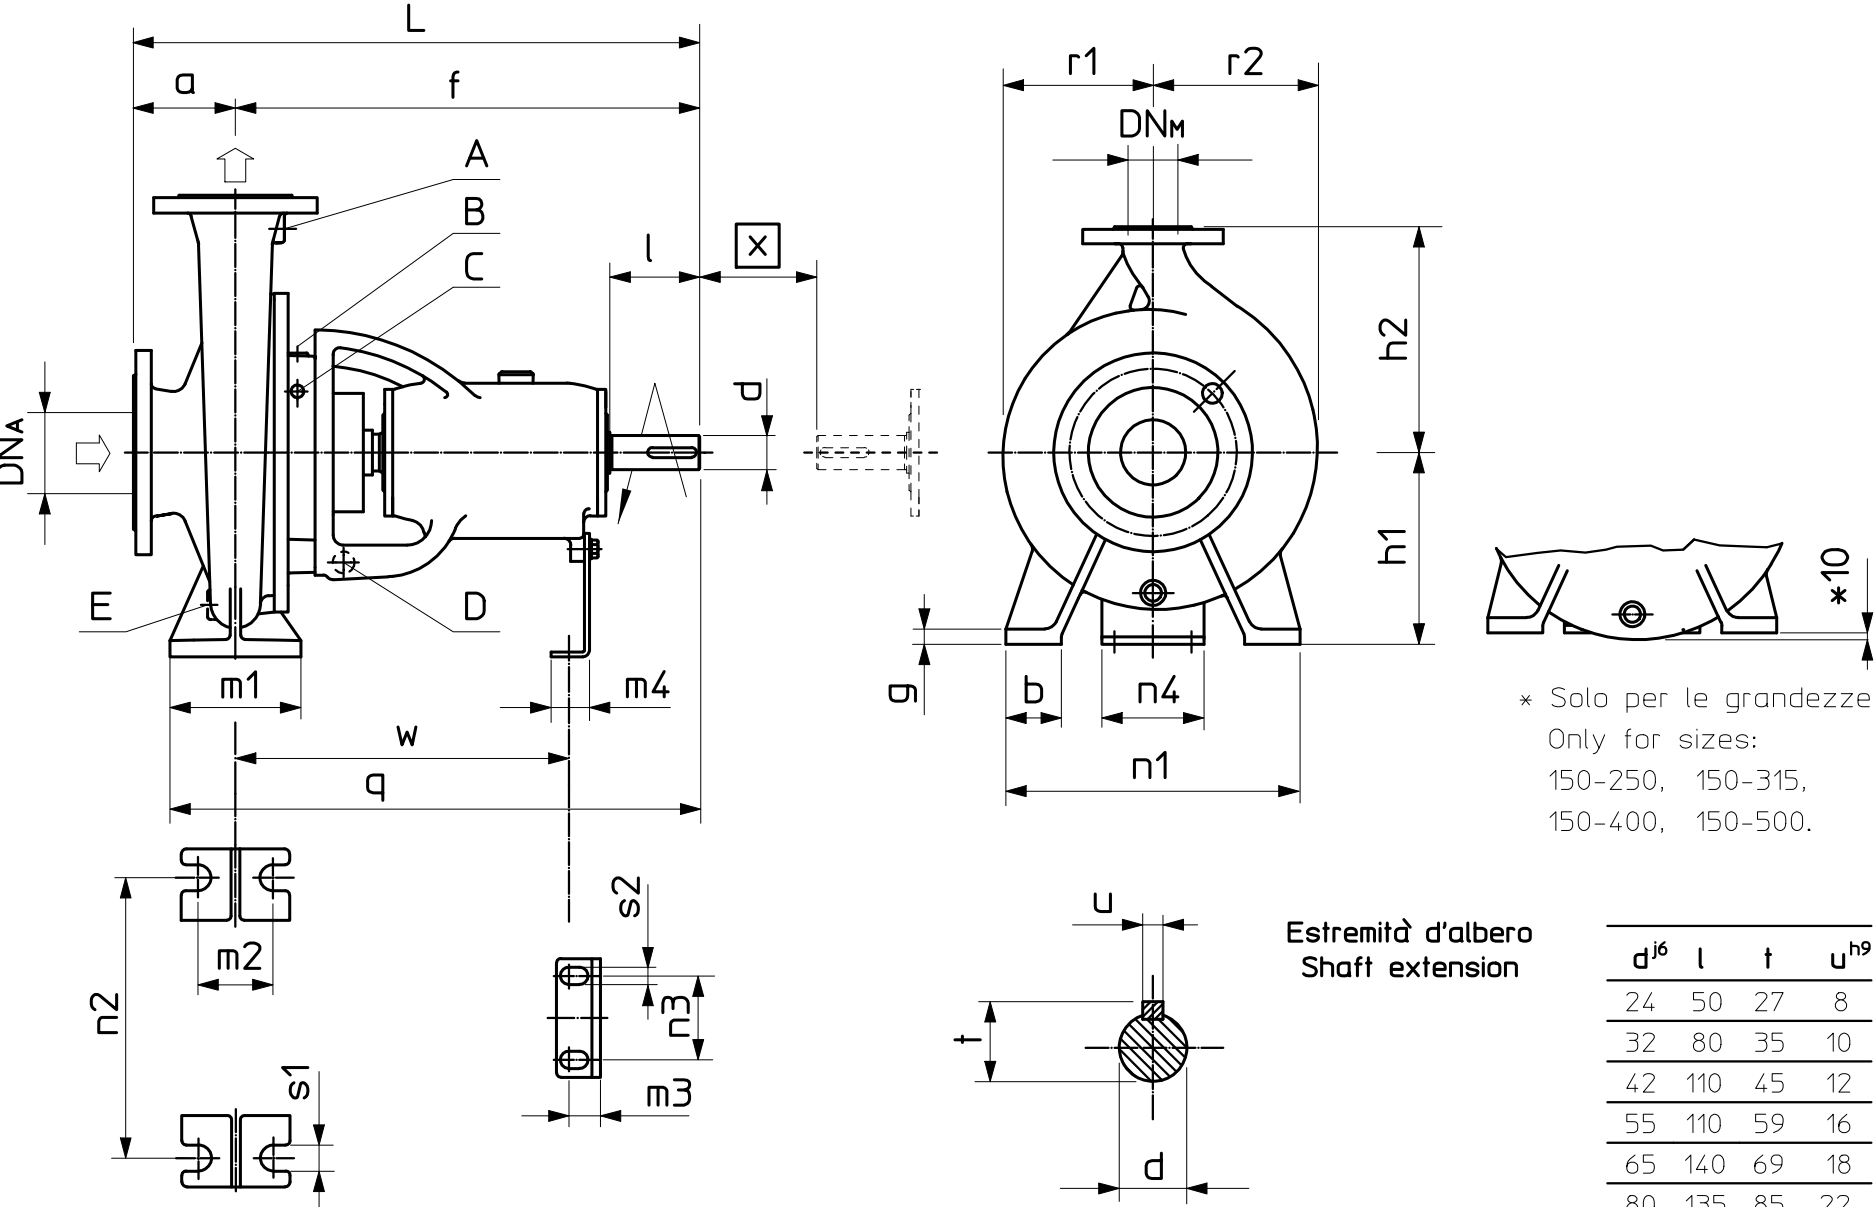


[X] Dimensione del giunto spaziatore per smontaggio pompa senza rimuovere il motore
Dimension of spacer for back pull-out without removing motor.

CONNESSIONI Connections

- A= Attacco manometro / Flussaggio tenuta meccanica
Pressure-gauge connection / Mechanical seal flushing
B= Attacco sbarramento idraulico / Flussaggio tenuta meccanica
Barrier fluid connection / Mechanical seal flushing
C= Due attacchi raffreddamento (solo su richiesta)
Two cooling fluid connections (only on request)
D= Attacco recupero perdite
Leakages recovery connection
E= Attacco drenaggio
Drain connection

Sopporto Bracket	A	B	C	D	E
1	G 1/4	G 1/4	G 1/4	G 3/8	G 1/4
2	G 1/4	G 1/4	G 3/8	G 1/2	G 1/4
3	G 1/2	G 1/4	G 3/8	G 1/2	G 1/2
4	G 1/2	G 1/4	G 3/8	G 1/2	G 1/2
5	G 1/2	G 3/8	G 3/8	G 1/2	G 1/2
6	G 1/2	G 3/8	G 3/8	G 1/2	G 1

DIMENSIONI FLANGE Flanges dimensions

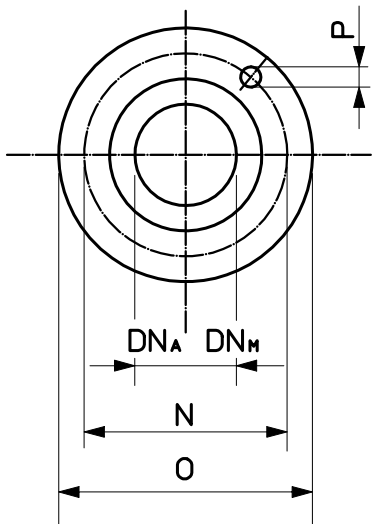

Norme di riferimento:
Reference standard:

Pompe in ghisa
Cast iron pumps
UNI EN 1092-2 PN16
Pompe in acciaio
Steel pumps
UNI EN 1092-1 PN16

DN _A DN _M	N	O	N. fori Holes n.	Ø P
32	100	140	4	18
40	110	150	4	18
50	125	165	4	18
65	145	185	4	18
80	160	200	8	18
100	180	225	8	18
125	210	250	8	18
150	240	285	8	22
200	295	340	12	22
250	355	405	12	25
300	410	480	12	25
350	470	535	16	25

Grandezza Size	Sopporito Bracket	Dimensioni pompa Pump dimensions																	Dimensioni fissaggio Fixing dimensions							M.A.S.A. Weight [kg]	
		DN _A	DN _M	a	f	h1	h2	b	d	g	L	m1	m4	n1	n4	q	r1	r2	x	m2	m3	n2	n3	s1	s2		w
32-125	1	50	32	80	385	112	140	50	24	13	465	100	47	190	140	435	92	100	100	70	25	140	110	14	14	285	30
32-160 •	1			80	385	132	160	50	24	14	465	100	47	240	140	435	104	112	100	70	25	190	110	14	14	285	34
32-200 •	1			80	385	160	180	50	24	14	465	100	47	240	140	435	123	130	100	70	25	190	110	14	14	285	40
32-250	2			100	500	180	225	65	32	18	600	125	47	320	140	562	150	156	100	95	25	250	110	14	14	370	64
40-160 •	1	65	40	80	385	132	160	50	24	14	465	100	47	240	140	435	110	120	100	70	25	190	110	14	14	285	35
40-200 •	1			100	385	160	180	50	24	15	485	100	47	265	140	435	130	139	100	70	25	212	110	14	14	285	39
40-250	2			100	500	180	225	65	32	18	600	125	47	320	140	562	152	160	100	95	25	250	110	14	14	370	65
40-315	2			125	500	200	250	65	32	18	625	125	47	345	140	562	182	190	100	95	25	280	110	14	14	370	80
50-125	1	80	50	100	385	132	160	50	24	15	485	100	47	240	140	435	107	127	100	70	25	190	110	14	14	285	36
50-160 •	1			100	385	160	180	50	24	15	485	100	47	265	140	435	120	135	100	70	25	212	110	14	14	285	38
50-200 •	1			100	385	160	200	50	24	16	485	100	47	265	140	435	137	150	100	70	25	212	110	14	14	285	43
50-250	2			125	500	180	225	65	32	18	625	125	47	320	140	562	160	170	100	95	25	250	110	14	14	370	69
50-315	2			125	500	225	280	65	32	18	625	125	47	345	140	562	195	205	100	95	25	280	110	14	14	370	85
65-125	1	100	65	100	385	160	180	65	24	16	485	125	47	280	140	448	117	140	100	95	25	212	110	14	14	285	43
65-160	2			100	500	160	200	65	32	17	600	125	47	280	140	562	135	157	100	95	25	212	110	14	14	370	58
65-200	2			100	500	180	225	65	32	18	600	125	47	320	140	562	148	168	100	95	25	250	110	14	14	370	66
65-250	2			125	500	200	250	65	32	19	625	160	47	360	140	580	173	192	100	120	25	280	110	18	14	370	76
65-315	3			125	530	225	280	80	42	15	655	160	47	400	140	610	195	210	140	120	25	315	110	18	14	370	135
80-160	2	125	80	125	500	180	225	65	32	18	625	125	47	320	140	562	154	184	100	95	25	250	110	14	14	370	65
80-200	2			125	500	180	250	65	32	18	625	125	47	345	140	562	160	188	100	95	25	280	110	14	14	370	70
80-250	2			125	500	225	280	80	32	20	625	160	47	400	140	580	178	202	100	120	25	315	110	18	14	370	85
80-315	3			125	530	250	315	80	42	20	655	160	47	400	140	610	206	224	140	120	25	315	110	18	14	370	130
80-400	3			125	530	280	355	80	42	22	655	160	47	435	140	610	248	265	140	120	25	355	110	18	14	370	152
100-200	2	125	100	125	500	200	280	80	32	20	625	160	47	360	140	580	184	208	100	120	25	280	110	18	14	370	85
100-250	3			140	530	225	280	80	42	20	670	160	47	400	140	610	192	222	140	120	25	315	110	18	14	370	115
100-315	3			140	530	250	315	80	42	22	670	160	47	400	140	610	221	246	140	120	25	315	110	18	14	370	166
100-400	3			140	530	280	355	100	42	16	670	200	47	500	140	630	263	288	140	150	25	400	110	22	14	370	172
125-250	3	150	125	140	530	250	355	80	42	22	670	160	47	400	140	610	212	255	140	120	25	315	110	18	14	370	137
125-315	3			140	530	280	355	100	42	22	670	200	47	500	140	630	237	272	140	150	25	400	110	22	14	370	153
125-400	3			140	530	315	400	100	42	14	670	200	47	500	140	630	263	288	140	150	25	400	110	22	14	370	177
150-250	3	200	150	160	530	280	380	100	42	22	690	200	47	500	140	630	245	313	140	150	25	400	110	22	14	370	170
150-315	4			160	670	280	400	100	55	24	830	200	46	550	200	770	255	305	180	150	24	450	140	22	14	500	220
150-400	4			160	670	315	450	100	55	25	830	200	46	550	200	770	295	345	180	150	24	450	140	22	14	500	262
150-500	4			180	670	355	500	100	55	26	850	200	46	550	200	770	335	370	180	150	24	450	140	23	14	500	310
200-315	4	250	200	200	670	355	450	100	55	25	870	200	46	550	200	770	300	375	180	150	24	450	140	23	14	500	270
200-400	4			180	670	355	500	100	55	25	850	200	46	550	200	770	320	375	180	150	24	450	140	23	14	500	310
200-500	4			200	678	415	560	100	55	22	870	200	46	660	200	778	300	460	180	150	24	560	140	23	14	510	390
250-315	4	300	250	250	670	400	560	110	55	28	920	250	46	670	200	795	340	430	180	200	24	560	140	23	14	500	340
250-400	5			200	840	400	600	130	65	30	1040	260	46	800	200	970	337	415	180	190	24	670	140	30	14	650	520
250-500	6			215	900	425	670	130	80	30	1115	260	80	800	200	1030	383	452	180	190	40	670	140	30	20	680	640
300-450	6	350	300	250	900	475	640	130	80	32	1150	330	80	800	200	1065	405	505	250	250	40	670	140	30	20	680	680
300-550	6			250	900	480	750	130	80	32	1150	330	80	900	200	1065	425	530	250	250	40	750	140	30	20	680	735

• RN/RKN