
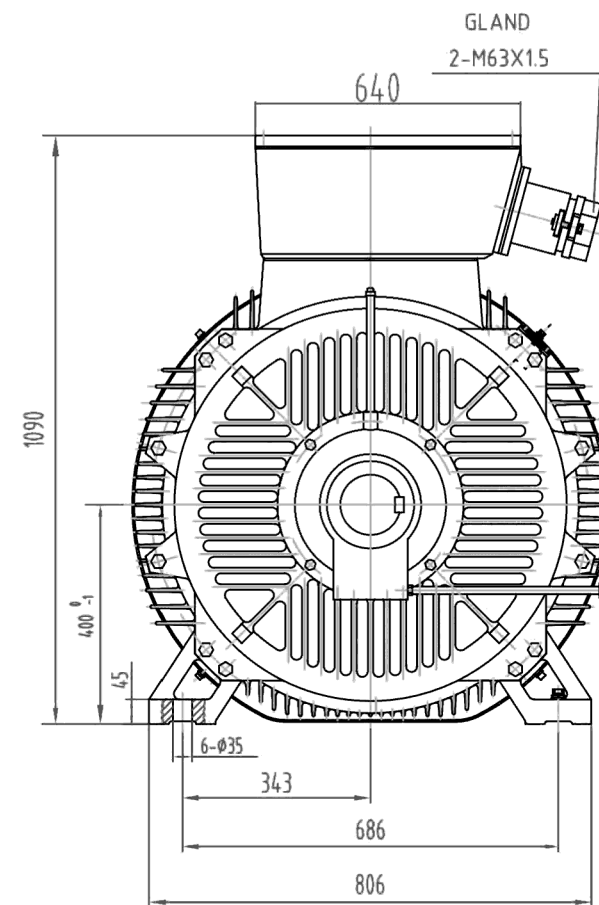


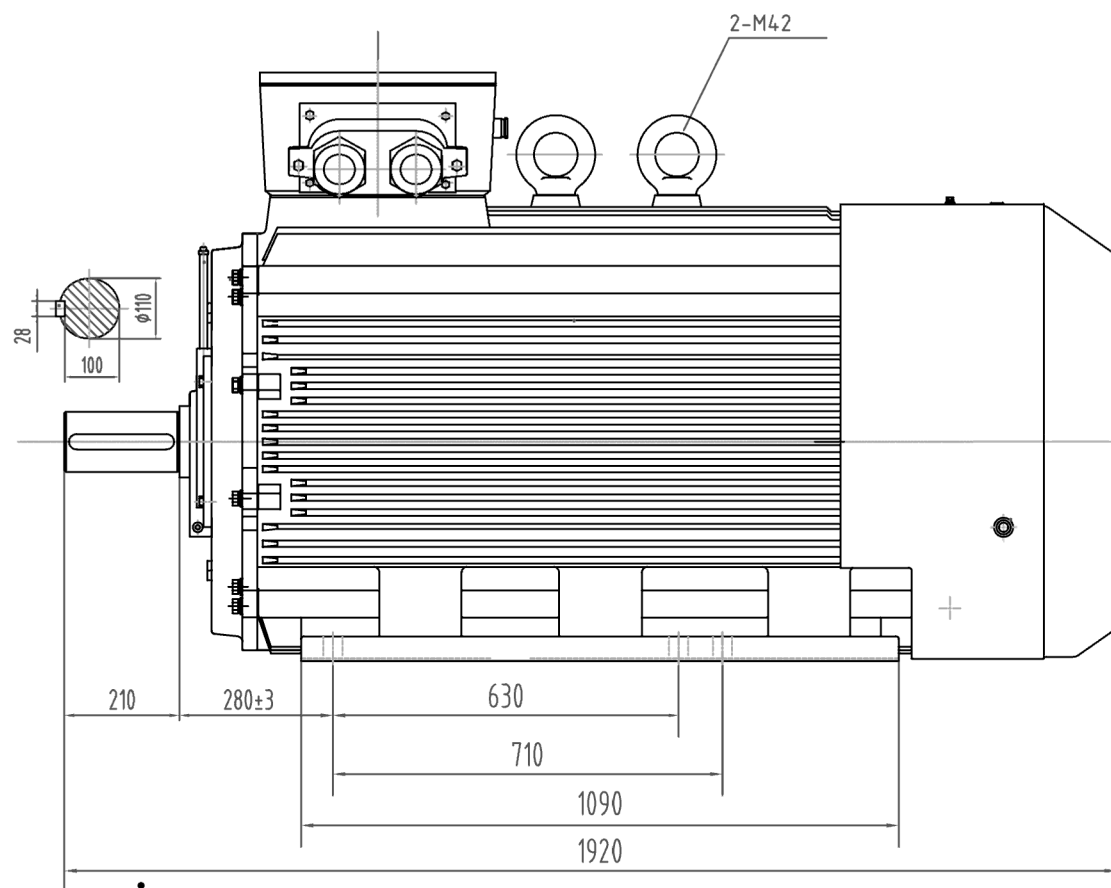

TYPE	KW	SPEED	CURRENT	EFFICIENCY	POWER FACTOR	LOCKED CURRENT RATED CURRENT	LOCKED TORQUE RATED TORQUE	MAX TORQUE RATED TORQUE	WEIGHT	DE BEARING	NDE BEARING
Y2E2-400M1-4	400KW	1490RPM	686A	95.5%	0.88	6.9	1.4	3.0	3000KG	SKF 6326/C3	SKF 6326/C3
Y2E2-400M2-4	450KW		773A			7.0	1.3		3100KG		
Y2E2-400L1-4	500KW		848A	96%	0.89	7.1	1.5		3200KG		
Y2E2-400L2-4	560KW		946A			6.5	1.4	3.1	3400KG		
Y2E2-400L3-4	630KW		1108A			7.1	1.5		3500KG		
Y2E2-400M1-6	315KW	990RPM	546A	95.8%	0.87	6.1	1.4	2.9	3100KG	SKF NU326/C3	SKF NU326/C3
Y2E2-400M2-6	355KW		615A			6.5			3200KG		
Y2E2-400L-6	400KW		683A	96.0%	0.88	7.5	1.5	3.5	3400KG		
Y2E2-400M1-8	250KW	745RPM	469A	95.0%	0.81	6.6	1.2	3.4	3100KG		
Y2E2-400M2-8	280KW		525A			6.7			3200KG		
Y2E2-400L1-8	315KW		563A		0.85	6.5	1.1	3.1	3300KG		
Y2E2-400L2-8	355KW		658A			7.0			3400KG		
Y2E2-400L3-8	400KW		750A		0.82	7.2	1.3	3.2	3500KG		