





Maniglia a ponte con boccole filettate cieche

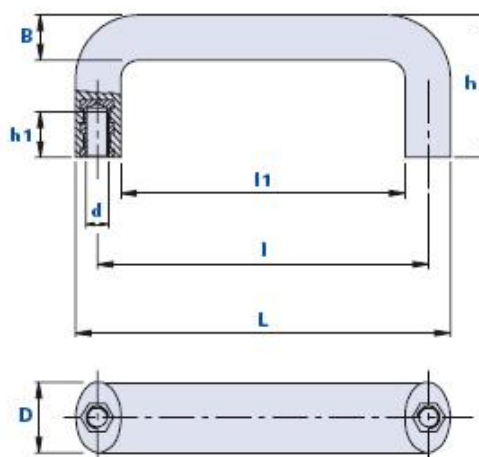

$$l(j) = P(N) \cdot h(m)$$

Codice	Descrizione	Dimensioni						Inserto		T1 - T2		F1 - F2		Peso grammi
		L	D	h	B	l1	l	d	h1	(N)	(N)	(J)	(J)	
01M20086C	M20/086 M6	102	24	45	14	71	86	M6	16	2650	3050	8,5	12,5	53
01M20086D*	M20/086 M8	102	24	45	14	71	86	M8	16	2650	3050	8,5	12,5	51
01M20117C	M20/117 M6	132	25	50	16	100	117	M6	16	2500	3400	8,5	12,5	79
01M20117D	M20/117 M8	132	25	50	16	100	117	M8	16	2500	3400	8,5	12,5	82
01M20120C	M20/120 M6	132	25	50	16	100	120	M6	16	2500	3400	8,5	12,5	79
01M20120D	M20/120 M8	132	25	50	16	100	120	M8	16	2500	3400	8,5	12,5	82

Materiale

Tecnopolimero a base poliammidica PA rinforzato con fibra vetro.

Resistente a sostanze chimiche organiche ed inorganiche quali oli, grassi, carburanti, solventi.

Colore

Nero finitura satinata. Altri colori (per adeguate quantità).

Inserto

Ottone.

Confezione

10 - 50 - 100 pcs.